



SecureTouch Surface Wave

For High-Threat Indoor Environments

Elo's SecureTouch touchscreens are the preferred touch solution for high-threat environments and indoor applications demanding rugged durability. SecureTouch touchscreens deliver high impact resistance; the durable screen comes in fully tempered, heat or chemically strengthened glass that continues to work even if scratched. With their stable, drift-free operation, the SecureTouch touchscreens are well suited for high usage environments and provides a touch response that is accurate. SecureTouch touchscreens are the ideal touch solution for kiosks in high-threat indoor environments, ticketing machines, interactive pay phones, and gaming machines.

Benefits

- High impact resistance
- Continues to work even if scratched
- Stable, drift-free operation
- 10-year limited warranty

Applications

- Kiosks in high-threat environments
- Ticketing machines
- Interactive pay phones
- Gaming machines

SecureTouch Surface Wave Specifications

MECHANICAL

Input Method	Finger or gloved hand (cloth, leather, or rubber) activation
Available Sizes	10.4" to 32"; visit our website for full specifications and other offerings

ELECTRICAL

Positional Accuracy	Standard deviation of error is less than 0.080 in. (2mm)
Resolution	Touchpoint density is based on controller resolution of 4096 x 4096, plus 255 levels corresponding to touch pressure
Touch Activation Force	Typically 2 to 3 ounces (55 to 85 grams)
Controller	Board: Serial (RS232) and USB

OPTICAL


Light Transmission	Up to 90%
--------------------	-----------

ENVIRONMENTAL

Temperature	Operating: -20°C to 50°C; Storage: -40°C to 71°C
Relative Humidity	Operating: 40°C at 90% RH, noncondensing
Altitude	Operating: 10,000ft (3,048m); Storage/transport: 50,000ft (15,240m)
Chemical Resistance	The touch active area of the touchscreen is resistant to chemicals that do not affect glass, such as: acetone, toluene, methyl ethyl ketone, isopropyl alcohol, methyl alcohol, ethyl acetate, ammonia-based glass cleaners, gasoline, kerosene, vinegar
Electrostatic Protection	Per EN 61000-4-2, 1995: Meets Level 4 (15 kV air/8 kV contact discharges)
Agency Approvals	UL, cUL, TÜV, CE, FCC Class A
Sealability	Can be sealed to meet NEMA 3/3R/5/12/12K/13, IP64 standards

DURABILITY

Surface Durability	Surface durability is that of glass, Mohs' hardness rating of 7
Expected Life	No known wear-out mechanism, as there are no layers, coatings, or moving parts. SecureTouch technology has been operationally tested to more than 50 million touches in one location without failure, using a stylus similar to a finger.
Impact Resistance	Meets UL-60950 and CSA 22.2 No. 60950 ball drop test (0.5kg, 50mm diameter ball dropped from height of 1.3m)
Warranty	Touchscreen: 10-year limited warranty Controller: 5-year limited warranty

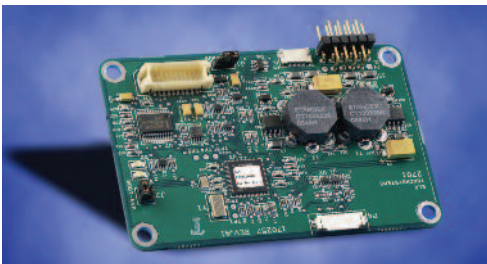

2701 dual serial/USB controller

To find out more about our extensive range of Elo touch solutions, go to www.elotouch.com, or call the office nearest you.

North America

TE Touch Solutions
301 Constitution Drive
Menlo Park, CA 94025-1110

800-ELO-TOUCH

Tel 1-650-361-4800
Fax 1-650-361-4722
eloinfo@elotouch.com

Europe

Tel +32 (0)16 35 21 00
Fax +32 (0)16 35 21 01
elosales@elotouch.com

Asia-Pacific

Tel +81 (45) 478-2161
Fax +81 (45) 478-2180
www.tps.co.jp

Latin America

Tel 786-923-0251
Fax 305-931-0124
www.elotouch.com.ar



Tyco Electronics Corporation and its Affiliates in the TE Touch Solutions business unit of the TE Connectivity Ltd. family of companies (collectively "TE") reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Elo (logo), Elo TouchSystems, SecureTouch, TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks of the TE Connectivity Ltd. family of companies.

Copyright 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All rights reserved. 06/11

