



# AccuTouch Zero-Bezel Five-Wire Resistive Touchscreens

For Human-Machine Interface

**The Elo TouchSystems AccuTouch Zero-bezel touchscreens are based on the proven standard AccuTouch five-wire resistive technology, the preferred solution for applications that demand reliability, input flexibility, and contamination resistance.** AccuTouch touchscreens, with proprietary Elo Touch Solutions resistive technology, deliver a touch response that is drift-free and accurate in high-use applications. The Zero-bezel design eliminates the need for a traditional front-bezel, achieving a smooth, seamless flat surface for a clean, modern look.

Compare the five-wire design of AccuTouch with a 4H coversheet hardness rating and where both X and Y measurements are made on a stable rear glass layer, with other resistive touchscreen designs using a flexing plastic coversheet that measure only one axis. As a result, AccuTouch touchscreens provide a longer product life backed by a five-year warranty—withstanding more than 35 million touches.

AccuTouch Zero-bezel touchscreens use a flexible printed circuit cable that virtually eliminates the cable attachment bump that is typical on most resistive touchscreens and enables a smooth, flat integration. The screens work with standard Elo controller/chip solutions and drivers under a wide variety of operating systems, and are available in a set of standard products as well as customized designs.

## Benefits

- Flat cable attachments for seamless integration and customization capabilities
- Zero-bezel configuration for seamless design eliminates the traditional bezel that can collect dust and dirt
- No lamination of additional décor foil is required which helps to reduce costs and supply chain complexity
- Stable, drift-free operation
- Broad input flexibility
- Contamination resistance
- Accuracy in high-use applications
- Can be sealed to support NEMA 4/4x/12 and IP65 standards upon integration
- 4H pencil hardness resists scratching

## Applications

- Point-of-sale (POS) terminals
- Voting machines
- Industrial automation
- Medical equipment
- Office automation
- Retail automation
- Pharmacy automation

# AccuTouch Five-Wire Resistive Specifications

## MECHANICAL

Input Method Finger, gloved hand, or stylus activation  
Available Sizes 7" to 22"; visit [www.elotouch.com](http://www.elotouch.com) for full specifications and other offerings

## ELECTRICAL

Positional Accuracy Standard deviation error is less than 0.080 (2mm)  
Resolution Touchpoint density is based on controller resolution of 4096 x 4096  
Touch Activation Force Typically less than 4 ounces (113 grams)  
Controller Board: Serial (RS232) and USB  
Chip: Serial (RS232) and USB

## OPTICAL


Light Transmission HL products: 80% – 5% at 550nm wavelength

## ENVIRONMENTAL


Temperature/Relative Humidity Operating: AccuTouch Zero-bezel—90% RH at 122°F (50°C) max  
Storage: AccuTouch Zero-bezel—90% RH at 122°F (50°C) max for 240 hrs, non-condensing  
Altitude Operating: 10,000 ft (3,048m)  
Storage/transport: 50,000 ft (15,240m)  
Chemical Resistance Industrial chemicals: acetone, methylene chloride, methyl ethyl ketone, isopropyl alcohol, hexane, turpentine, mineral spirits, unleaded gasoline, diesel fuel, motor oil, transmission fluid, antifreeze. Food-service chemicals: vinegar, coffee, tea, grease, cooking oil, salt, plus most commercial cleaners including ammonia-based glass cleaner and laundry detergent.  
Electrostatic Protection Per EN 61000-4-2, 1995: Withstands 20 discharges up to 15kV  
Agency Approvals UL, cUL, TÜV, CE, FCC Class A  
Sealability Can be sealed to meet NEMA 4 and 12 and IP 65 standards

## DURABILITY


Surface Durability AccuTouch Zero-bezel: meets pencil hardness 4H per ASTM D3363  
Expected Life Operationally tested to 35 million touches in one location without failure  
Warranty Touchscreen: 5-year limited warranty  
Controller: 5-year limited warranty

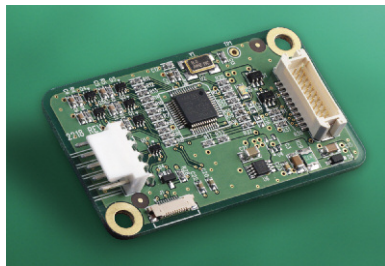

2218 combo controller board

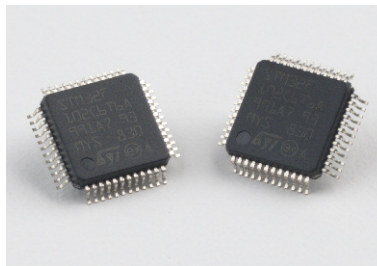

COACH V combo controller chip

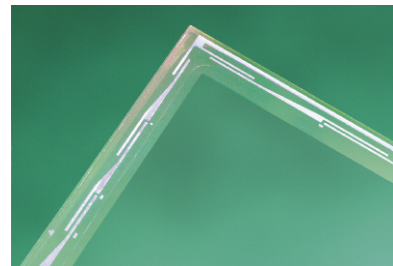

Z-border pattern for enhanced linearity

To find out more about our extensive range of Elo touch solutions, go to [www.elotouch.com](http://www.elotouch.com), or call the office nearest you.

### North America

Elo Touch Solutions  
301 Constitution Drive  
Menlo Park, CA 94025-1110

800-ELO-TOUCH

Tel 1-650-361-4800

Fax 1-650-361-4722

[customerservice@elotouch.com](mailto:customerservice@elotouch.com)

### Europe

Tel +32 (0)16 35 21 00

Fax +32 (0)16 35 21 01

[elosales@elotouch.com](mailto:elosales@elotouch.com)

### Asia-Pacific

Tel +81 (45) 478-2161

Fax +81 (45) 478-2180

[www.tps.co.jp](http://www.tps.co.jp)

### Latin America

Tel 786-923-0251

Fax 305-931-0124

[www.elotouch.com.ar](http://www.elotouch.com.ar)

Elo Touch Solutions, Inc. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. AccuTouch, Elo (logo), and Elo Touch Solutions are trademarks of Elo Touch Solutions, Inc.  
Copyright 2012 Elo Touch Solutions, Inc. All rights reserved. 10/12