



- Sensitive touch performance with “Built for Touch” reliability
- Pure-glass touchscreen for optimal image quality
- 3 year standard warranty



## 2794L 27-inch Open-Frame Touch Display

The Elo 2794L 27" open-frame LCD touch display features a slim design and narrow outside dimensions due to the state-of-the-art energy-saving LED backlight, using less electricity to operate and generating less heat. Featuring a brilliant wide viewing angle panel, the 2794L instantly grabs and holds the users' attention for kiosks, casino and amusement, retail self-service, and industrial automation.


This compact touch display is “designed for touch” with proven Elo expertise and reliability built in. The 2794L provides stable “drift-free” operation with outstanding image clarity and light transmission—for accurate touch responses and vivid images. The touchscreen is sealed against dirt, dust and liquids, which simplifies integration into the final enclosure. Long-lasting product availability can be expected as the design and tooling is controlled by Elo specifications.

Available with a choice of industry-leading touch technologies, in single-, dual- or multi-touch technology,

including IntelliTouch® Plus dual-touch surface acoustic wave (SAW) touchscreen technology, IntelliTouch single-touch SAW, iTouch® single-touch with zero-bezel, and Elo's latest projected capacitive (PCAP) 2GS (two glass solution) multi-touch display with zero-bezel, offering both a ten touch “tablet like” interactive experience along with thru-glass functionality - both modes support single or dual latex gloves as well as cloth gloves.

At Elo, we design, build and are responsible for the complete solution with touch integrated from the start. We use our own touchscreens combined with our software and drivers, everything is designed to work together and tested as part of our life testing processes.

Worldwide agency approvals cover the whole display, which is developed, built, serviced and supported by a true single source supplier. The 2794L open-frame LCD touch display provides an economical solution for system integrators and VARs.

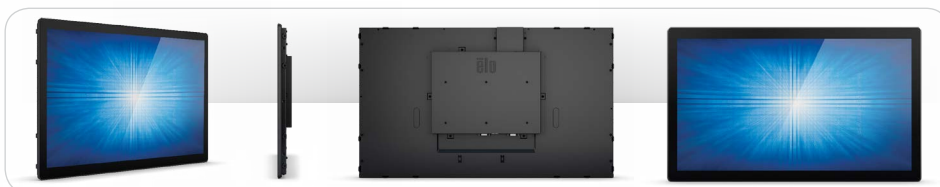

### Benefits

- Choice of touch technology:
  - **Standard bezel:** IntelliTouch SAW or IntelliTouch Plus SAW
  - **Zero-bezel:** Projected capacitive or iTouch
- Viewing angle of 178°(h) x 178°(v), for sharp colors and graphics in both portrait and landscape modes
- High definition LCD display offers ultimate HD interactivity, clarity and resolution
- PCAP 2GS (two glass solution) offers pristine optical clarity and touch durability
- 10 touch projected capacitive (PCAP) with Thru-glass capabilities that passes UL-60950 & IK-07 Impact testing
- Intellitouch SAW models come standard with chemically strengthened glass and pass UL 60950 & IK-07 impact testing

### Application

- Casino and amusement games
- Retail self-service
- Kiosks
- Industrial Automation

### About Elo

Elo founders pioneered the touchscreen over 40 years ago. Today, Elo Touch Solutions is a leading global supplier of touch-enabled technology, products and industry solutions. The Elo portfolio encompasses the broadest selection of OEM touchscreen components, touch displays, and all-in-one touchcomputers for the demanding requirements of diverse markets, including gaming machines, hospitality systems, industrial automation, interactive kiosks, healthcare, office equipment, point of sale terminals, retail displays, and transportation applications. The Elo touch experience has consistently stood for quality, reliability and innovation with over 20 million installations worldwide.

## 2794L 27-inch Open-Frame Touch Display

Specifications	
Model	2794L
Color	Black
Active Display Area	597.6 x 336.15 mm / 23.53 x 13.23 inches
Diagonal	27"
Aspect Ratio	16:9
Dimensions	<b>Bezel:</b> 633.2 x 374.4 x 41.8 mm / 24.93 x 14.74 x 1.65 inches; <b>Zero-Bezel:</b> 644.2 x 388.4 x 39.6 mm / 25.36 x 15.29 x 1.56 inches
Native Resolution	1920x1080 50, 60Hz
Other Supported Resolutions	640x480 at 60Hz; 720x400 at 70Hz; 800x500 at 60Hz; 800x600 at 56, 60Hz; 1024x768 at 60Hz; 1280 x 800 60 Hz; 1280x1024 at 60Hz; 1366x768 at 60Hz, 60Hz RB; 1440x900 at 60Hz, 60Hz RB; 1680x1050 at 60Hz, 60Hz RB; 1920 x 1080 at 50, 60HzB
Colors	16.7 million
Brightness (typical)	LCD panel: 300 nits; iTouch: 270 nits; IntelliTouch: 270 nits; IntelliTouch Plus: 270 nits; PCAP: 270 nits
Response (typical)	12ms
Viewing Angle	Horizontal: 89°/178°; Vertical: 89°/178°
Contrast Ratio	3000:1
On-Screen Display	<b>Accessible through switches on the unit's tethered OSD Control box.</b> <b>Controls:</b> Menu, Up, Down, Select, Power <b>Settings:</b> Brightness, Contrast, Clock, Phase, H-position, V-position, Auto-Adjust, Aspect Ratio, Sharpness, Color Temperature, OSD Timeout, OSD Language, OSD H-Position, OSD V-Position, Recall Defaults, Video Priority, Information, Touch On Sleep Mode, Touch Through <b>Languages:</b> English, French, Italian, German, Spanish, Simplified Chinese, Traditional Chinese, Japanese <b>Lockouts:</b> OSD, Power
Input video format	Analog VGA and DisplayPort
Input video signal connector	Analog VGA on Female DB-15 connector DisplayPort V1.1a - Supports later versions of Display Port video input
Scanning frequency	Horizontal: 30 - 82 kHz; Vertical: 50 - 75 Hz
Power	<b>External DC - Optional power brick (sold separately)</b> <b>Monitor input power connector:</b> Coaxial power jack (2.0mm (+0.0 -0.1mm) pin outer diameter, 6.4mm (+/- 0.3mm) barrel inner diameter, 8.8mm (+/- 0.3mm) barrel depth) <b>Monitor input power signal specifications:</b> 12VDC +/- 5%
Power Consumption	ON (monitor + power brick): 30W SLEEP (monitor + power brick): 1.5W OFF (monitor + power brick): 0.5W
Temperature	Operating: 0 °C to 40 °C (32 °F to 104 °F); Storage: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	Operating: 20% to 80%; Storage: 10% to 95%
Weight	Unpackaged: 16.1 lb (7.3 Kg); Packaged: 22.27 lb (10.1 Kg)
Shipping Dimensions	782 (L) x 530 (W) x 200 (H) mm / 30.79 (L) x 20.87 (W) x 7.87 (H) inches
Mounting Options	200x100mm VESA mount on rear of unit; 4 Hole mounting interface on all four sides; Front mount with optional bezel kit (IT/AT/ST Models); Flush mount with included brackets (PCAP/iTouch/Non-Touch Models)
Warranty	3 years standard
MTBF	50,000 hours demonstrated
Agency Approvals	UL, FCC; RCM; cUL, IC; CCC; CE, TUV; VCCI; KCC; CoC; BSMI; CB; RoHS, China RoHS, WEEE, IMERC
What's in the Box	<b>All displays include:</b> VGA Cable, RJ45 OSD Remote, USB Touch Cable, User Manual CD, and Quick Install Guide; <b>For Zero-Bezel Models:</b> Flush Mount Brackets w/Screws; <b>For Bezeled Models:</b> "L" (Side Mount) Brackets w/Screws

## Ordering Information

Model	Part Number	Part Description	Technology	Interface	Surface Treatment	Video Interface	Availability
2794L	E186635	ET2794L-2UWA-0-MT-ZB-NPB-G	Projected Capacitive	USB	Clear	VGA & DP	Worldwide
	E198424	ET2794L-4CWA-0-ST-ZB-NPB-G	iTouch	Dual serial/USB	Clear	VGA & DP	Worldwide
	E187031	ET2794L-8UWA-0-DT-NPB-G	IntelliTouch Plus	USB	Clear	VGA & DP	Worldwide
	E198623	ET2794L-8CWA-0-ST-NPB-G	IntelliTouch	Dual serial/USB	Clear	VGA & DP	Worldwide

To find out more about our extensive range of Elo touch solutions, go to [elotouch.com](http://elotouch.com), or call the office nearest you.

### North America

Elo Touch Solutions  
1033 McCarthy Boulevard  
Milpitas, CA 95035

800-ELO-TOUCH

Tel +1 408 597 8000  
Fax +1 408 597 8001

customerservice@elotouch.com

### Europe

Tel +32 (0)16 70 45 00  
Fax +32 (0)16 70 45 49

elosales@elotouch.com

### Asia-Pacific

Tel +86 (21) 3329 1385  
Fax +86 (21) 3329 1400

www.elotouch.com.cn

### Latin America

Tel +1 786-923-0251  
Fax +1 305-931-0124

www.elotouch.com

Elo reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Elo, the Elo logo, iTouch, and IntelliTouch are either trademarks or registered trademarks of Elo Touch Solutions, Inc. All other trademarks are the property of their respective owners. © 2016 Elo Touch Solutions, Inc. All rights reserved. 16051AES00038

