



AccuTouch Five-Wire Resistive For Human-Machine Interface

Elo AccuTouch touchscreens, the proven market leader in five-wire resistive technology, are the preferred solution for applications that demand reliability, input flexibility, and contamination resistance. AccuTouch touchscreens, with their patented technology, deliver a touch response that is drift-free and accurate in high-use applications. Compare the five-wire design of AccuTouch, where both X and Y measurements are made on the stable rear glass layer vs. other resistive technology designs where the flexing plastic coversheet is used to measure one axis. AccuTouch touchscreens provide a longer product life backed by a five-year warranty—withstanding more than 35 million touches vs. the one-year warranty typical with four/eight-wire manufacturers. AccuTouch touchscreens can be sealed against contamination and certified to meet NEMA 4/4x/12 and IP 65 standards. AccuTouch touchscreens are the ideal solution for POS, voting machines, industrial automation, medical equipment, retail, office, and pharmacy automation.

Benefits

- Stable, drift-free operation
- Broad input flexibility
- Contamination resistance
- Accuracy in high-use applications
- Long product life
- Meets NEMA 4/4x/12 and IP 65 standards

Applications

- Point-of-sale (POS) terminals
- Voting machines
- Industrial automation
- Medical equipment
- Office automation
- Retail automation
- Pharmacy automation

AccuTouch Five-Wire Resistive Specifications

MECHANICAL

Input Method	Finger, gloved hand, or stylus activation
Available Sizes	6.4" to 21.3"; visit our Web site for full specifications and other offerings

ELECTRICAL

Positional Accuracy	Standard deviation error is less than 0.080 (2 mm)
Resolution	Touchpoint density is based on controller resolution of 4096 x 4096
Touch Activation Force	Typically less than 4 ounces (113 grams)
Controller	Board: Serial (RS232) and USB Chip: Serial (RS232) and USB

OPTICAL


Light Transmission	HL products: 80% +/-5% at 550 nm wavelength
--------------------	---

ENVIRONMENTAL


Temperature/ Relative Humidity	Operating: 90% RH at max 35°C (standard design) 90% RH at max 50°C (enhanced design) Storage: 90% RH at max 35°C for 240 hrs, noncondensing (standard design) 90% RH at max 50°C for 240 hrs, noncondensing (enhanced design)
Altitude	Operating: 10,000 ft (3,048 m) Storage/transport: 50,000 ft (15,240 m)
Chemical Resistance	Industrial chemicals: acetone, methylene chloride, methyl ethyl ketone, isopropyl alcohol, hexane, turpentine, mineral spirits, unleaded gasoline, diesel fuel, motor oil, transmission fluid, antifreeze. Food-service chemicals: vinegar, coffee, tea, grease, cooking oil, salt, plus most commercial cleaners including ammonia-based glass cleaner and laundry detergent.
Electrostatic Protection	Per EN 61000-4-2, 1995: Withstands 20 discharges up to 15 kV
Agency Approvals	UL, cUL, TÜV, CE, FCC Class A
Sealability	Can be sealed to meet NEMA 4 and 12 and IP 65 standards
Surface Durability	3H per ASTM D3363
Expected Life	Operationally tested to 35 million touches in one location without failure
Warranty	Touchscreen: 5-year limited warranty Controller: 5-year limited warranty



2216 combo controller board

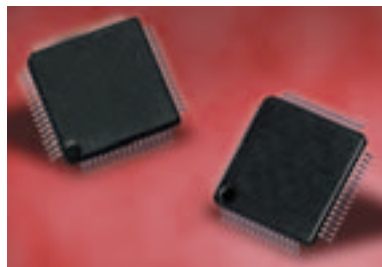

COACh III combo controller chip

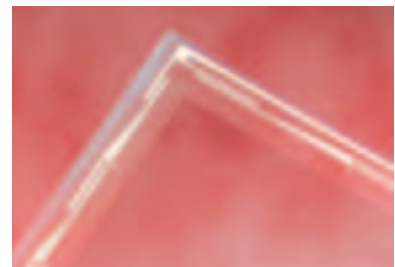

Z-border pattern for enhanced linearity

Find out more about the extensive range of Elo touch solutions. Go to www.elotouch.eu or simply call the office nearest you.

Corporate Headquarters

Tel +1 650 361 4700
Fax +1 650 361 4747
eloinfo@elotouch.com
www.elotouch.com

European Headquarters

Tel +32 16 35 21 00
Fax +32 16 35 21 01
elosales@elotouch.com
www.elotouch.eu

Asia-Pacific Headquarters

Tel +81 45 478 2161
Fax +81 45 478 2180
info@tps.co.jp
www.tps.co.jp

Latin America Headquarters

Tel +1 305 428 5210
Fax +1 305 717 4909
eloinfo@elotouch.com
www.elotouch.com.ar



Tyco Electronics Corporation reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

AccuTouch, COACh, Elo TouchSystems, IntelliTouch, TE Logo, and Tyco Electronics are trademarks.
Copyright 2007 Tyco Electronics Corporation 8/07.



Our commitment. Your advantage.