



Surface Capacitive

Excellent General Purpose Technology

Elo Surface Capacitive touchscreens are a reliable resource for the capacitive options currently available—and from a world-class manufacturer. They are ideal for use in gaming and casino applications, especially bar-top and slot machine installations.

We have utilized our 35 years of design knowledge and applied it to a completely new capacitive touchscreen product line. Elo's narrow, patented Z-borders yield an inherently linear sensor. The transparent protective coating makes the sensor resistant to scratches and abrasions. Touch performance is unaffected by everyday abuse and mishaps such as dirt, dust, condensation, liquid spills, contaminants or cleaning solutions. Yet the surface capacitive touchscreens respond quickly and easily with excellent dragging performance.

Our capacitive touchscreens deliver the quality touch response you would expect from an Elo product.

Benefits

- Patented narrow Z-border electrode pattern for greater linearity
- Rear back shield for reliable operation
- Fast, sensitive touch response with excellent dragging performance
- Compatible with industry standard protocols including Elo's SmartSet protocol

Applications

- Gaming/Amusement
- Point-of-Sale terminals (POS)
- Kiosks

Surface Capacitive Specifications

MECHANICAL

Input Method	Finger
Available Sizes	12" to 20" flat; Visit our Web site for full specifications and offerings
Glass Thickness	0.118" / 3.0 mm nominal. (Glass only, not including tape, wires and/or solder if used)

ELECTRICAL

Positional Accuracy	Reported touch coordinates are within 1.5% of true position (based on viewing area dimensions)
Resolution	Touchpoint density is based on controller resolution of 4096 x 4096
Controller	Board: Serial and USB
ESD	+/- 8kV contact; +/- 27 kV DC

OPTICAL

Light Transmission	Up to 85% per ASTM D1003
--------------------	--------------------------

ENVIRONMENTAL

Temperature	Touchscreen Operating: -15°C to 70°C Storage: -50°C to 85°C Controller Operating: -40°C to 70°C Storage: -50°C to 85°C
Relative Humidity	Operating/Storage: 10% to 90% RH, noncondensing
Chemical Resistance	Water, ammonia, isopropyl alcohol, and similar non-abrasive cleaners
Agency Approvals	UL, cUL, TÜV, CE, FCC Class A & B, CISPR B
Sealability	Can be sealed to meet NEMA 4 and 12 and IP 65 standards


DURABILITY

Surface Durability	Anti-glare hardcoat cannot be scratched using any stylus with Mohs rating equal to or less than 6.
Expected Life	Tested in the laboratory to withstand over 160 million (mechanically simulated) touches without noticeable degradation.
Warranty	Touchscreen 5-year limited warranty Controller 5-year limited warranty

* Always store the touch screen sensor and controller in its original shipping container. Never store them in an environment where condensation may form.



Z-border electrode pattern for enhanced linearity

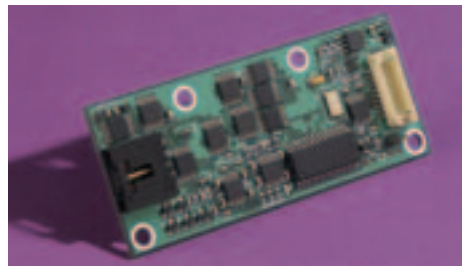

5020 dual serial and USB controller

Find out more about the extensive range of Elo touch solutions. Go to www.elotouch.eu or simply call the office nearest you.

Corporate Headquarters

Tel +1 650 361 4700
Fax +1 650 361 4747
eloinfo@elotouch.com
www.elotouch.com

European Headquarters

Tel +32 16 35 21 00
Fax +32 16 35 21 01
elosales@elotouch.com
www.elotouch.eu

Asia-Pacific Headquarters

Tel +81 45 478 2161
Fax +81 45 478 2180
info@tps.co.jp
www.tps.co.jp

Latin America Headquarters

Tel +1 305 428 5210
Fax +1 305 717 4909
eloinfo@elotouch.com
www.elotouch.com.ar



Tyco Electronics Corporation reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

AccuTouch, COACH, Elo TouchSystems, IntelliTouch, TE Logo, and Tyco Electronics are trademarks.
Copyright 2007 Tyco Electronics Corporation 8/07.



Our commitment. Your advantage.