



THIS DRAWING IS A CONTROLLED DOCUMENT. MS600014

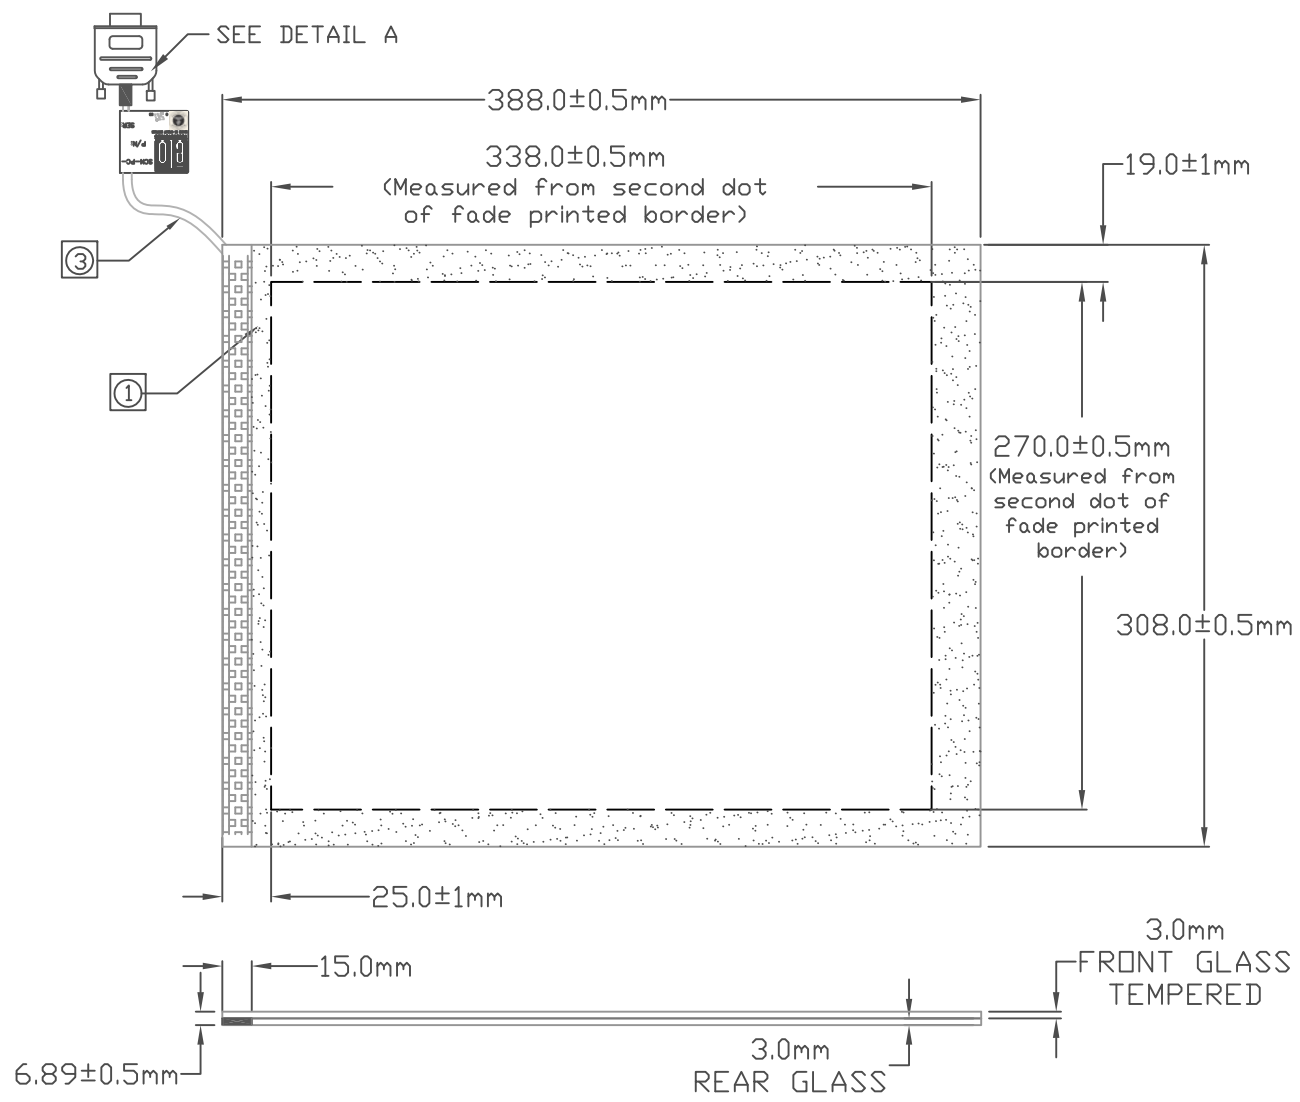

**NOTES:**

1. ALL DIMENSIONS ARE IN MILLIMETERS AND INCHES.
2. FOR USE WHEN SENSING A TOUCH THROUGH A SACRIFICIAL GLASS.
3. CABLE: [400±20]mm LONG, UL RATED.
4. BLACK DOT FADE PRINTED BORDER.
5. POWER REQUIREMENT PROVIDED BY RS232 PORT.
6. SURFACE QUALITY SPECIFICATION: ELO'S ES500051.

TOUCHSCREEN TABULATION	
PART NUMBER	SURFACE FINISH
E577114	ANTIGLARE

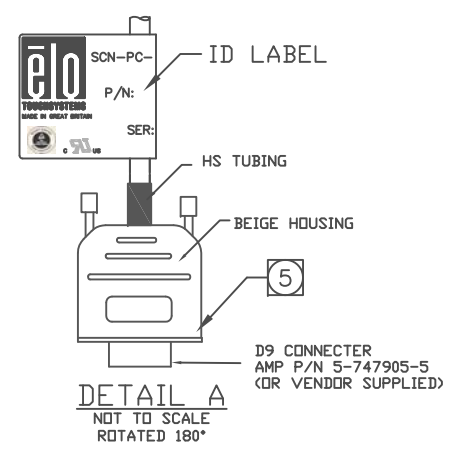

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND ELECTRONICS PERSONNEL. IT IS TO BE KEPT UNCLASSIFIED AND UNCONTROLLED FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA, USA.

LOC 08  
DIST 08

AMP 3307-7 REV 31MAR2000

B	Revised per ECO-11-001047: Changed thickness of both laminated glass to 3mm	01-19-11	BC	DS	
A	Initial release per ECO6357	10-30-06	LA	DS	
P	LTR	REVISION RECORD	DATE	DRN	APVD

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	± 1
1 PLC	± 2
2 PLC	± 3
3 PLC	± 4
4 PLC	± 5

DRN	10-16-08	MATERIAL	HEAT TREAT
LEO A.			N/A
CHK	10-16-08		N/A
J. RONEY		Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608	
APD	10-16-08		
J. RONEY			
NAME	MARKETING SPEC. PROJ. CAPACITIVE		
	SCN-PC-FLT17.0-001-003-T-R		
SCALE	1:1	SIZE	A2
DRAWING NO	MS600014		SHEET
	1	OF	1
REV	B		

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1