


CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	H
2	X
3	S
4	Y
5	L

THIS DRAWING IS A CONTROLLED DOCUMENT. DWG NO. MS500745

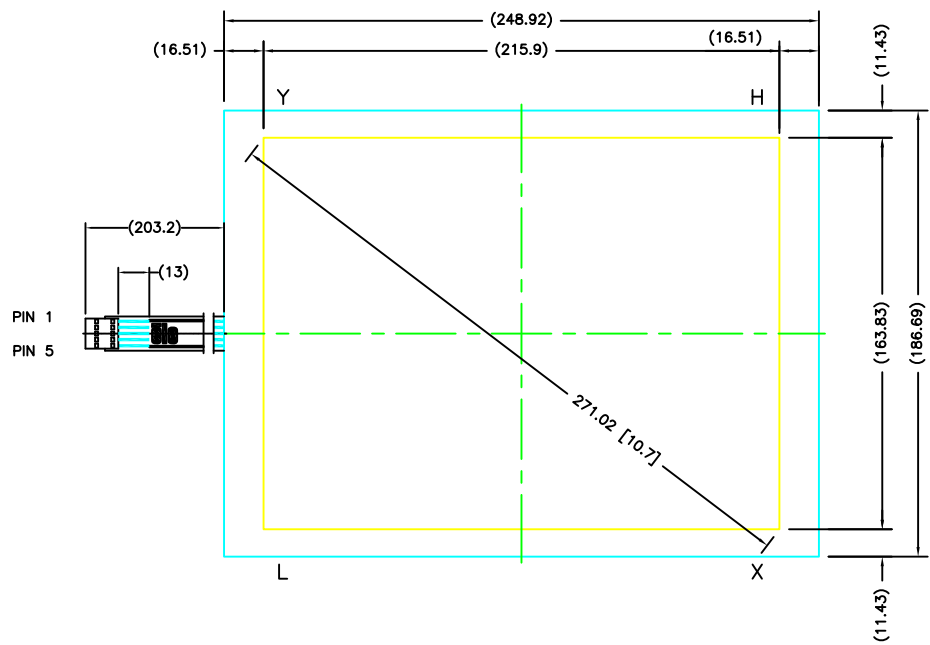

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO ELO TOUCH SOLUTIONS AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. ELO, IT SOLUTIONS PERSONNEL, PRODUCT, AND/OR INFORMATION FROM ELO TOUCH SOLUTIONS (www.elotouch.com).

LOC 08  
DIST 08

NOTES:  
1. GLASS THICKNESS 2.36mm NOMINAL.  
2. FINISHED PART THICKNESS 2.67mm NOMINAL.

REV	DESCRIPTION	DATE	BY	CHK
D	ECO-13-001739: NO FORM/FIT/FUNCTION CHANGE. EXTENDED DSCA AT CABLE ONLY	01/30/13	QC	QC
C	ECO-12-02130: REVISED TO MATCH ASSY DWG; CHANGED TO GENERIC FORMAT	07/13/12	BC	QC
B	ECO-11-007278: THICKNESS 2.67+0.5/-0mm	04/13/11	RB	RB
P	LTR			

DIMENSIONS:	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	± 0.8
1 PLC	± 0.4
2 PLC	± 0.2
3 PLC	± -
4 PLC	± -
ANGLES:	
SURFACE TEXTURE:	N/A

DRN	10/18/08	MATERIAL	ACCUTOUCH	HEAT TREAT	N/A
Q. CHUNG					N/A
CHK					
APVD	12/03/12				
Q. CHUNG					
DIMENSIONAL DRAWING SON-AT-FLT10.4-W01-OH1-R					
SCALE	1:1	SIZE	A2	DRAWING NO.	MS500745
SHEET	1	OF	1	REV	D