



CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	H
2	X
3	S
4	Y
5	L

THIS DRAWING IS A CONTROLLED DOCUMENT.
REV NO MS500758

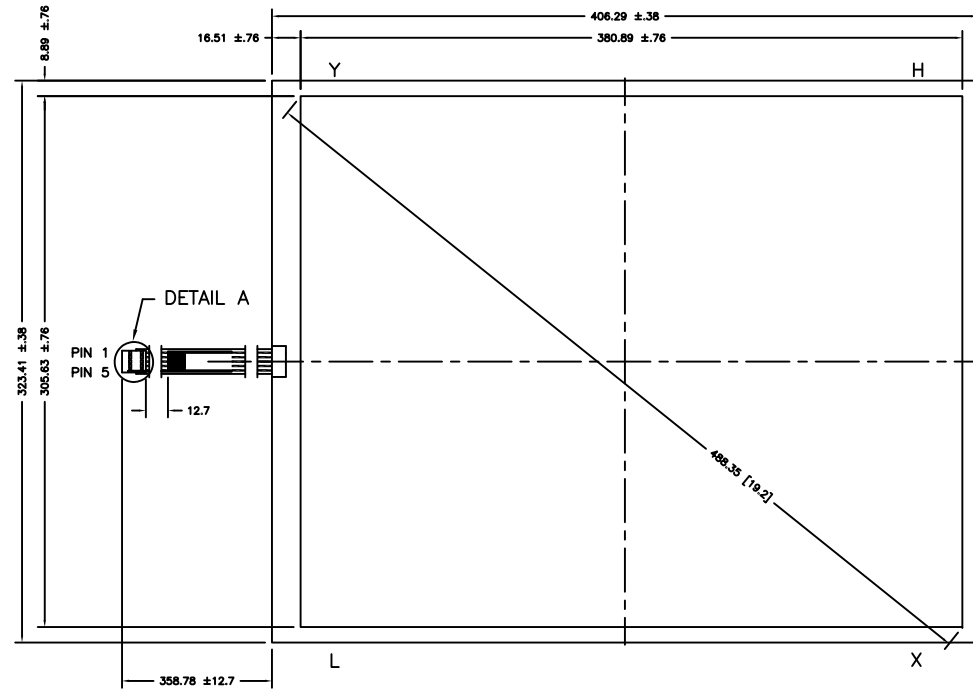

THIS DRAWING IS A CONTROLLED DOCUMENT.
REV NO MS500758

LOC 08
DIST 08

NOTES:
1. GLASS THICKNESS 3.18mm NOMINAL
2. FINISHED PART THICKNESS 3.48 +0.5mm/-0.0mm.

P	LTR	REVISION RECORD	DATE	DN	APVD
B		ECO-11-007277 FINISHED PART THICKNESS 3.48 +0.5mm/-0.0mm.	4/19/11	RB	
A		RELEASE PER ECO 5370	11/2/05		QC

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
	0 PLC ±.8	1 PLC ±.4	2 PLC ±.2
	3 PLC ±.2	4 PLC ±.1	5 PLC ±.1
	6 PLC ±.1	7 PLC ±.1	8 PLC ±.1
ANGLES:	-		
SURFACE TEXTURE:	√		

DNW Q. CHUNG	10/17/05	MATERIAL ACCUTOUCH	HEAT TREAT -
CHK -	-	TE Connectivity	
APVD Q. CHUNG	10/17/05		
MARKETING DRAWING			
SCALE: 1:1			
SIZE: A2	DRAWING NO: MS500758	SHEET: 1 OF 1	REV: B