
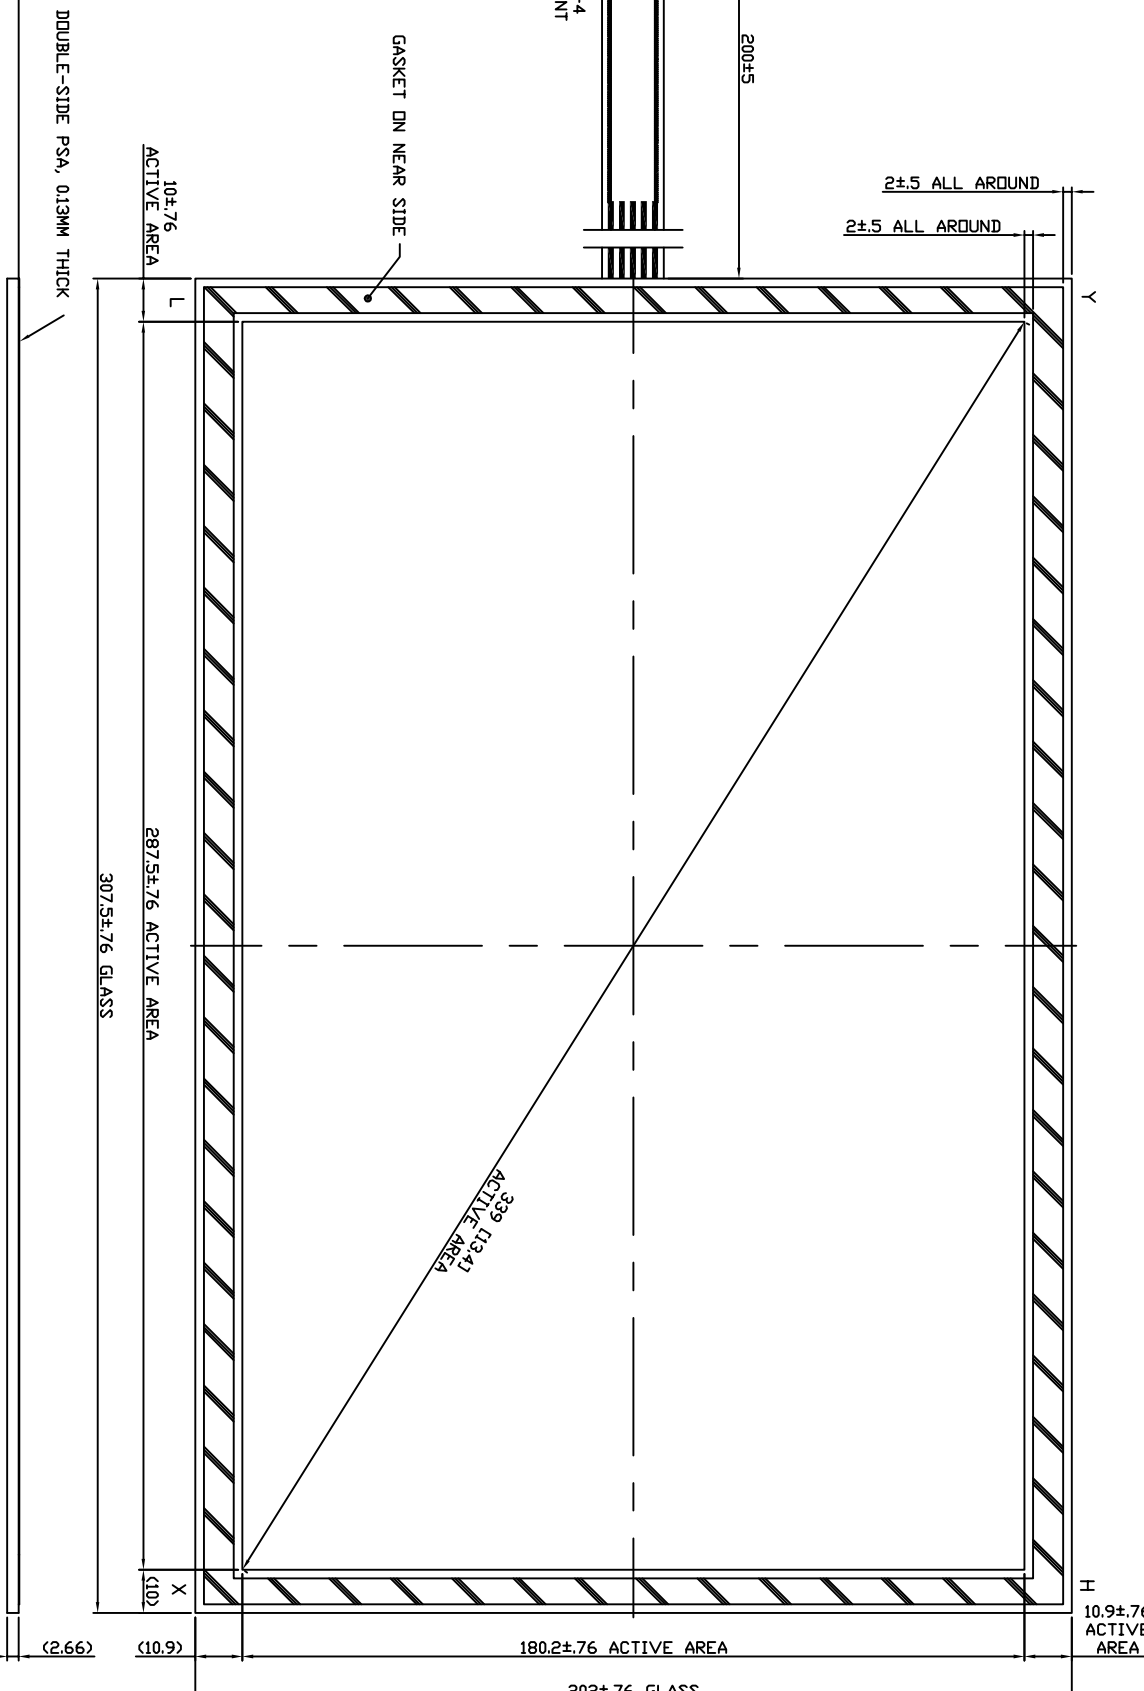


CONNECTOR	
PINOUT	PIN NO.   DESIGNATION
1	H
2	X
3	S
4	Y
5	L

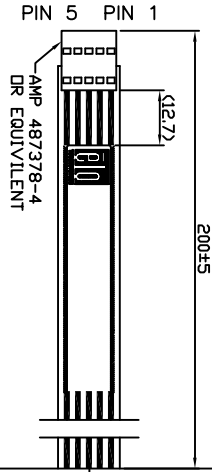

NOTES:

1. GLASS THICKNESS 2.36mm NOMINAL.
2. FINISHED PART THICKNESS 2.66mm NOMINAL.
3. THE BORDER AREA IS FLAT WITHIN ±127 MICRONS.
4. FRONT GASKET: DOUBLE-SIDED PSA, 0.13mm THICK, CLEAR.
5. PINOUT IS ELD STANDARD AT TAIL END (HXSYL).

AMP 3307-7 REV. 3/10/09

REV	DATE	BY	APP'D	REVISION RECORD
A	04/06/10	QC		ECO-10-008910: INITIAL RELEASE

DIMENSIONS		TOLERANCES UNLESS SPECIFIED	
0	0.13	±.1	±.1
1	0.13	±.1	±.1
2	0.13	±.1	±.1
3	0.13	±.1	±.1
4	0.13	±.1	±.1
5	0.13	±.1	±.1
6	0.13	±.1	±.1
7	0.13	±.1	±.1
8	0.13	±.1	±.1

DATE	09/18/09	TERMINATOR	ACQUINOCHI	HEAT TREAT	N/A
DRW	Q. CHUNG				
DATE	09/18/09	MARKETING DRAWING			
NAME	Q. CHUNG				
SCALE	1:1	MARKETING NO	MS600830	SHEET	1 OF 1
REV	A2				

10.9±.76 ACTIVE AREA

180.2±.76 ACTIVE AREA

202±.76 GLASS

(2.66)

(10.9)

A B C D