


INTELLITOUCH® TOUCHSCREEN
SCN-IT-FLT27.8-001-006

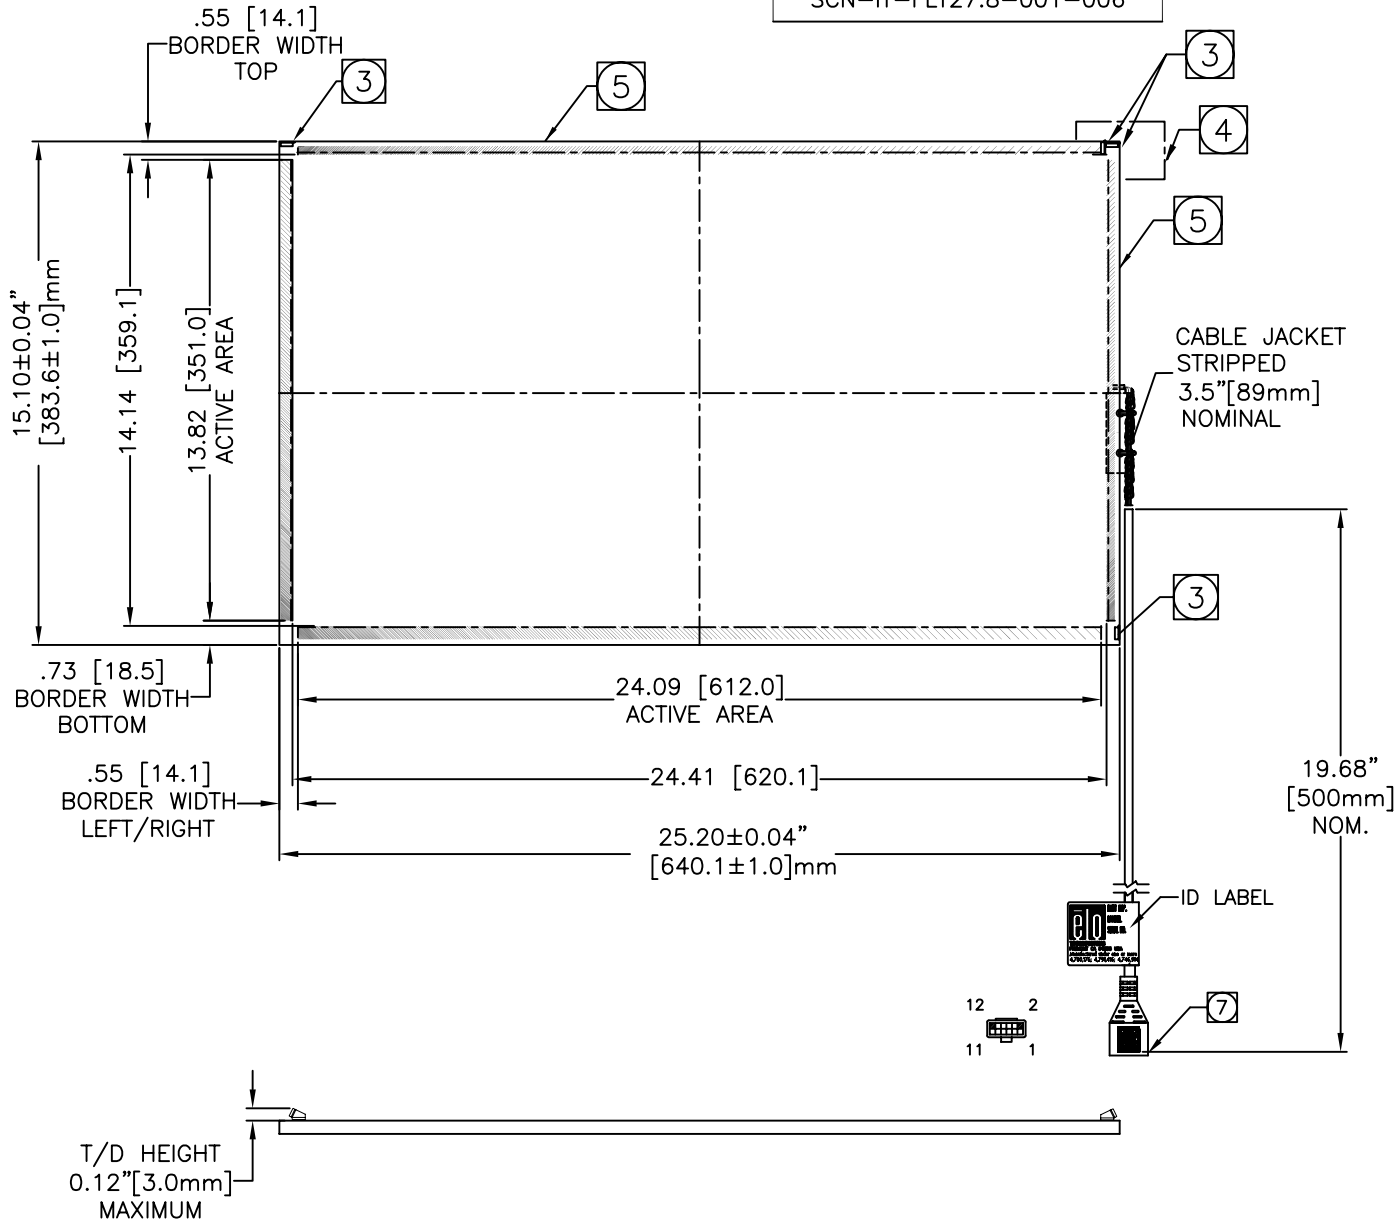

NOTES:

- ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS.
- GLASS THICKNESS: [5.0±0.2]mm/0.20±0.008".
- TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. HEIGHT OF TRANSDUCERS ABOVE GLASS SURFACE = [3.0mm] 0.12" MAX.
- CABLE ROUTING ON THE GLASS EDGE ADDS 0.15" [3.8mm] AS SHOWN.
- CABLE IS ROUTED ALONG THE EDGE OF THE GLASS. CABLE JACKET IS STRIPPED 89mm [3.5"] FOR EASE DURING INTEGRATION PROCESS.
- BLACK TAPES ARE APPLIED ON THE BACK SURFACE OF THE GLASS OPPOSITE THE ARRAY PATTERNS.
- BERG 65043-031, 2x6 HOUSING WITH BERG 48239-000 RECEPTACLES, DIRECTLY MATES WITH ANY OF THE FOLLOWING:
-INTELLITOUCH SERIAL CONTROL BOARD
-012226 CABLE (2x6 TO 8" DB9 BULKHEAD)
- THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.
- SURFACE QUALITY SPECIFICATION: ES500051. ELLIPTICAL BUBBLES TO BE CLASSIFIED AS LINEAR DEFECTS. MAX. LENGTH=12.5mm[0.5"] AND MAX. WIDTH=0.25mm[0.01"].

CONNECTION CHART

PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE (+)	BLU	BLK
4	Y TRANSMIT (+)	BLU	GRY
5	Y RECEIVE (-)	BLK	BLK
6	Y TRANSMIT (-)	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT (-)	RED	RED
9	X RECEIVE (-)	RED	BLK
10	X TRANSMIT (+)	GRN	RED
11	X RECEIVE (+)	WHT	BLK
12	KEY		

TOUCHSCREEN TABULATION

PART NO	SURFACE FINISH
E31327-000	CLEAR