



INTELLITOUCH® TOUCHSCREEN
SCN-IT-SFP19.0-B94-J03-R

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE PER ECD5478	11/18/05	CCB

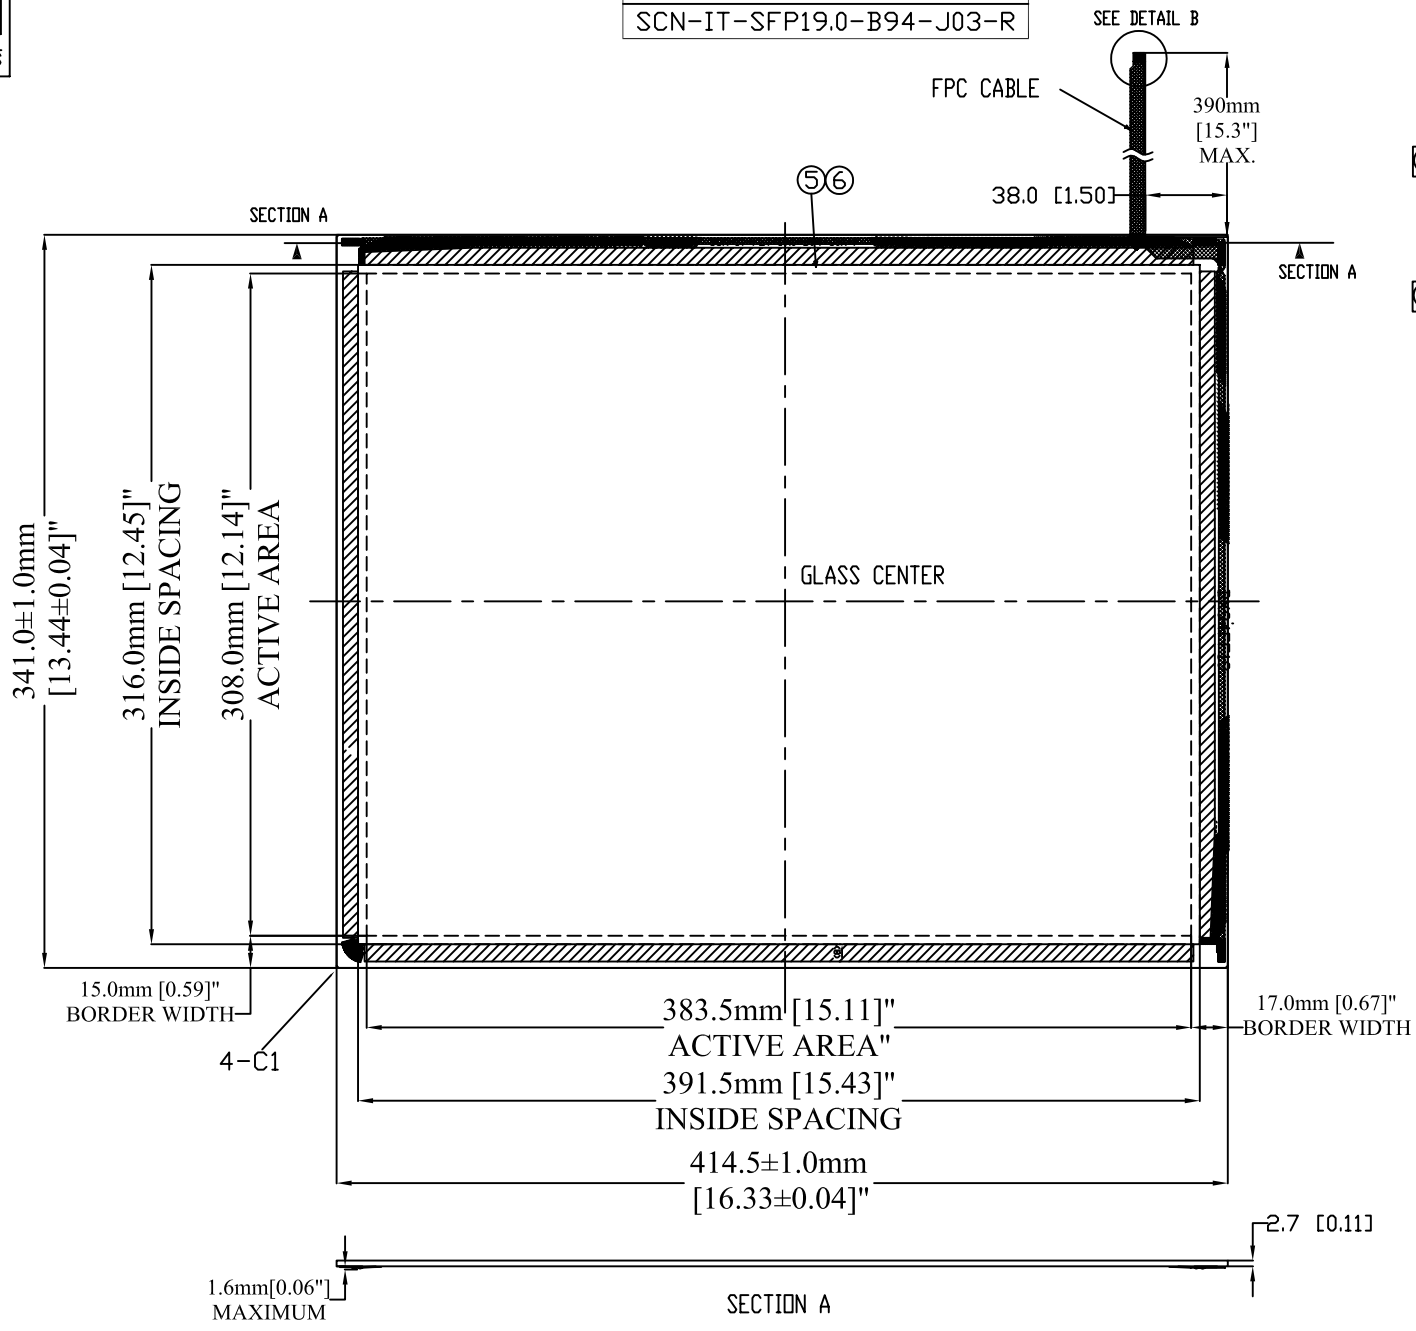

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS AND INCHES.
2. GLASS THICKNESS: 2.7mm[0.106"] NOMINAL.
3. WRAP-AROUND PIEZOS ARE LOCATED ON THE BACK SURFACE OF THE GLASS DIRECTLY OPPOSITE THE GRATING PATTERNS (HEIGHT ADDED: 1.6mm/0.06" MAX).
4. FLEXIBLE PRINTED CIRCUIT (FPC) WIRES ARE ROUTED ON THE BOTTOM SURFACE OF THE GLASS DIRECTLY OPPOSITE THE RECEIVE ARRAY PATTERNS (X AND Y AXIS).
5. FLEXIBLE PRINTED CIRCUIT (FPC) WIRE DIRECTLY MATES WITH INTELLITOUCH CONTROLLER PART NUMBER D68054-000 (CTR-270100-IT-RSU-00R).
6. THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.



Line No.	signal assign
1	Y transmit -(GND)
2	Y transmit +
3	Y transmit -(GND)
4	Y receive +
5	Y receive -
6	X receive -
7	X receive +
8	X transmit -(GND)
9	X transmit +
10	X transmit -(GND)

TOUCHSCREEN TABULATION	
PART NUMBER	SURFACE FINISH
E214009 (BX94FF19)	ANTI GLARE