


INTELLITOUCH® TOUCHSCREEN
 SCN-IT-FL148.0-001-J06-W-4
 ELO P/N: E2122296

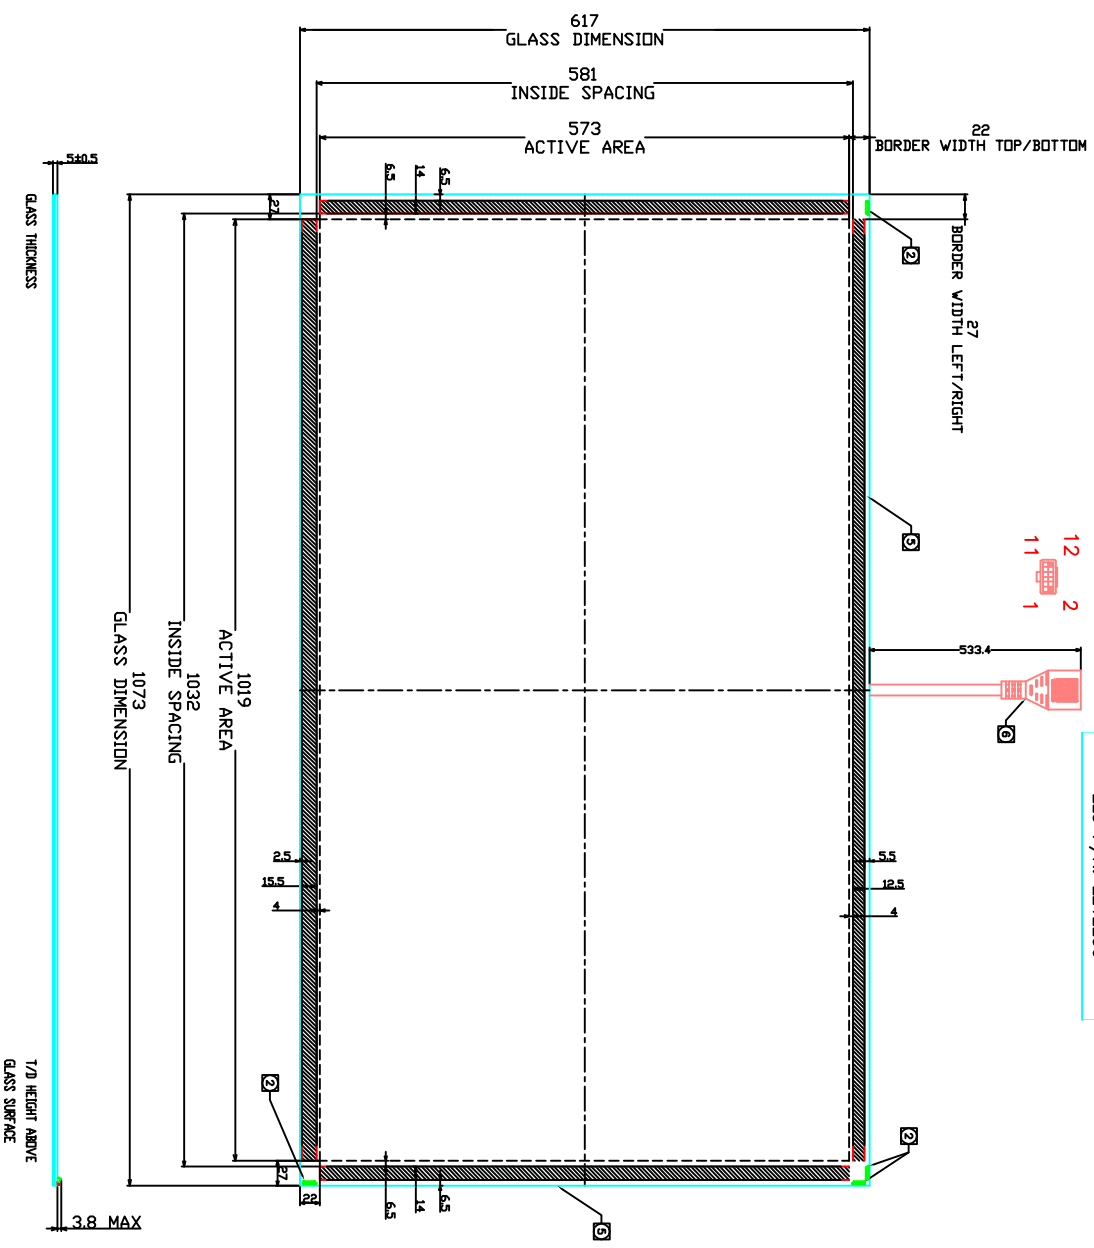

| REV. | DESCRIPTION | DATE | APPROVED |
|------|-----------------------------------|----------|----------|
| A | INITIAL RELEASE PER ECU-07-015994 | 07/18/07 | CCB |

- NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS.
 2. TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. HEIGHT OF TRANSDUCERS ABOVE GLASS SURFACE: 3.8mm MAX.
 3. LAMINATED GLASS THICKNESS: 5.0±0.5mm.
 4. NO MATERIAL EXTENDS MORE THAN 0.8mm BEYOND THE BACK SURFACE OF THE GLASS.
 5. CABLE IS ROUTED ON THE SIDE EDGE OF GLASS.
 6. CABLE DIRECTLY MATES WITH INTELLITOUCH CONTROLLER D68054-000 (CTR-270100-IT-RSU-00R).
 7. THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.
 8. SCREEN IS DESIGNED FOR A 46.0 DISPLAY MODEL: SAMSUNG LTA-460HS-L01.
 9. COSMETIC SPECIFICATION: VSS00320 (SS-CA-004).

| PIN | SIGNAL | INSULATION COLOR | JACKET COLOR |
|-----|----------------|------------------|--------------|
| 1 | GROUND | OVERALL SHIELD | |
| 2 | KEY | | BLK |
| 3 | Y RECEIVE (+) | BLU | BLK |
| 4 | Y TRANSMIT (+) | BLU | GRY |
| 5 | X RECEIVE (-) | BLK | BLK |
| 6 | Y TRANSMIT (-) | YEL | GRY |
| 7 | GROUND | INNER SHIELD | |
| 8 | X TRANSMIT (-) | RED | RED |
| 9 | X RECEIVE (-) | RED | BLK |
| 10 | X TRANSMIT (+) | GRN | RED |
| 11 | X RECEIVE (+) | WHT | BLK |
| 12 | KEY | | BLK |

ELO
 TOUCH SYSTEMS
 MS690527
 DATE: 07/18/07
 REV. A