




NOTES:
 1. ALL DIMENSIONS +/- 1.0MM UNLESS NOTED
 2. DIMENSIONS SHOWN ARE FOR ALL TOUCH TECHNOLOGIES UNLESS NOTED.

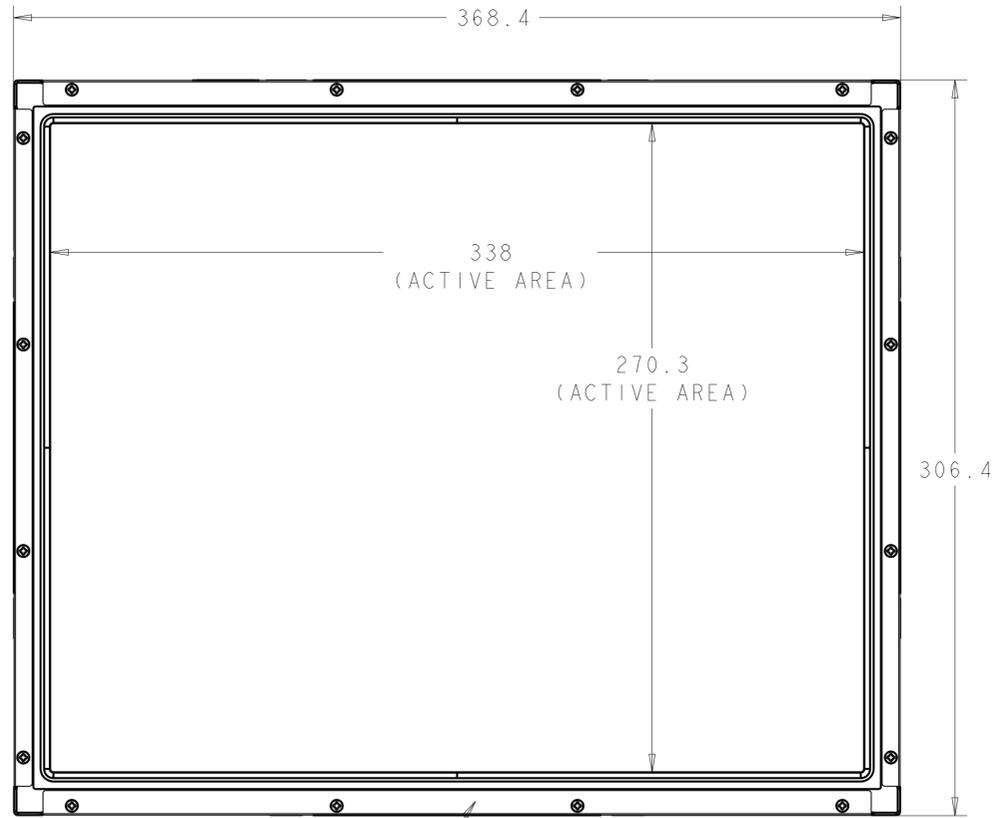



BEZEL WITH WIPER BLADE SEAL

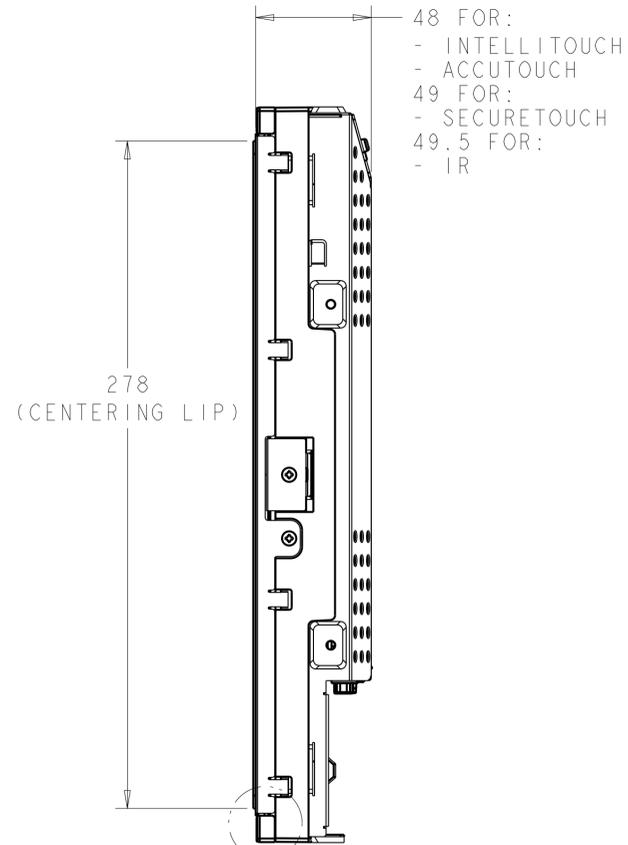


SEE DETAIL A



DETAIL A
 CENTERING LIP
 TYP.
 SCALE 1:1

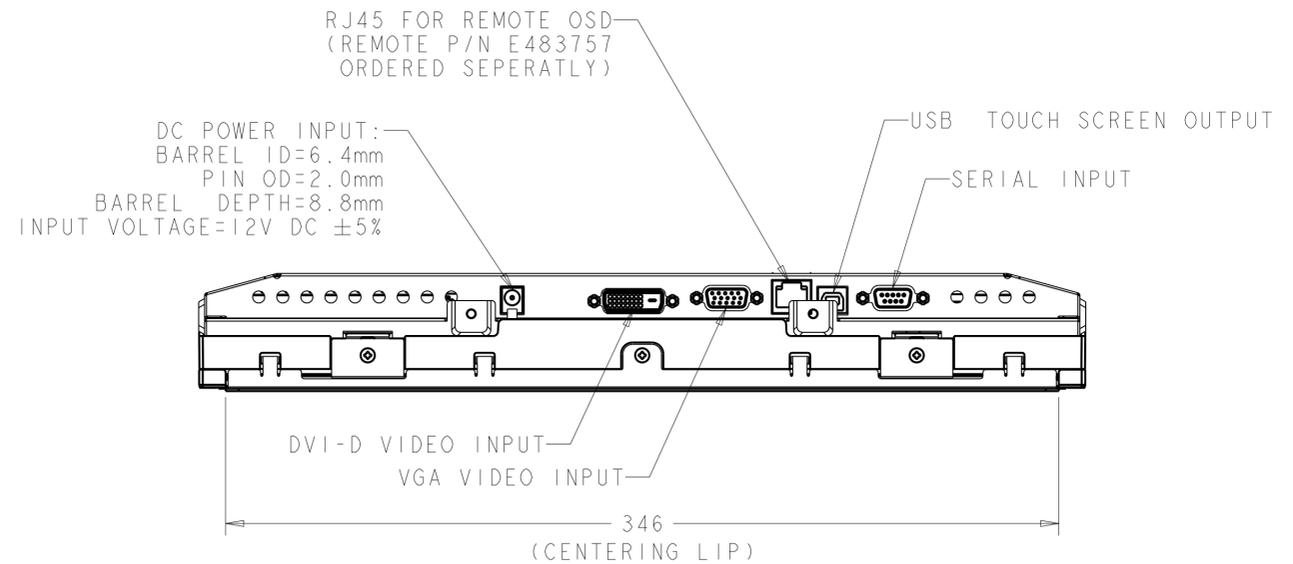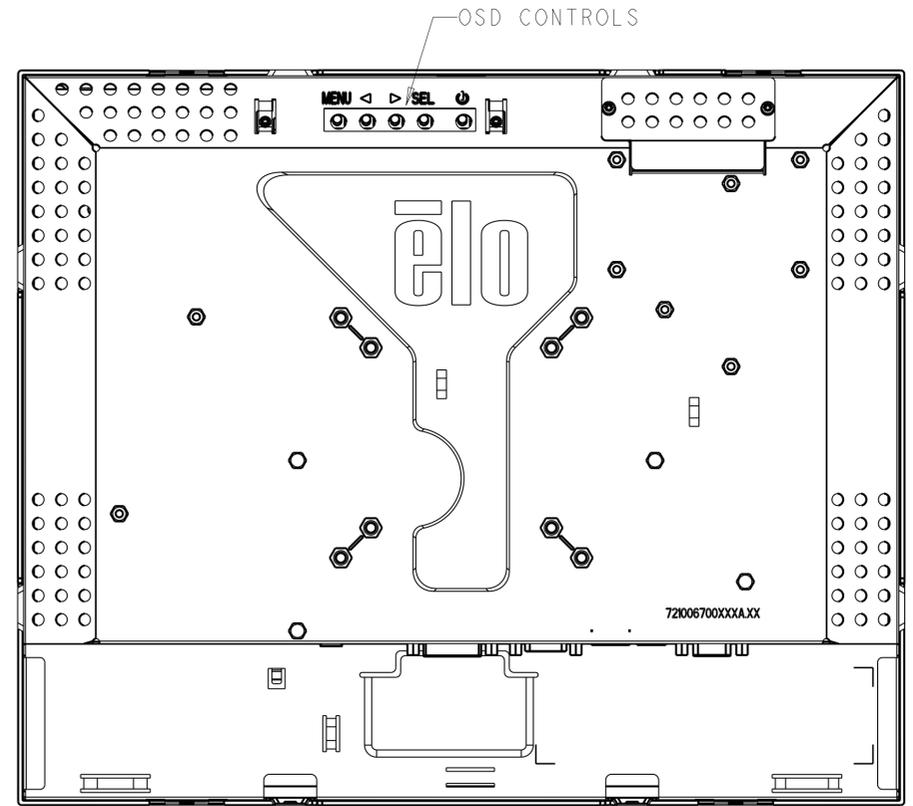

**RECOMMENDED CUSTOMER
PANEL CUT-OUT (SEE NOTE A)**

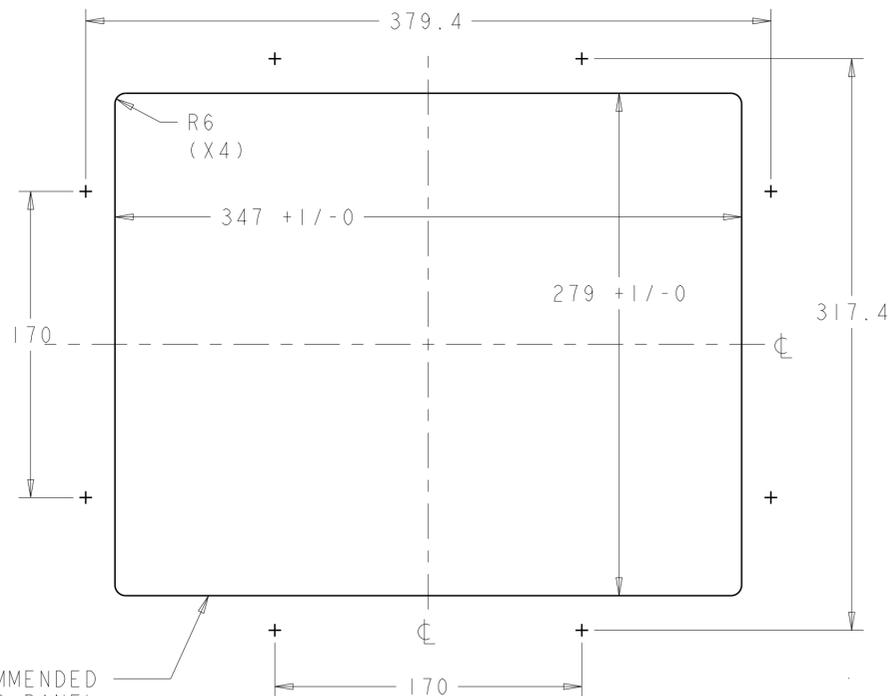

NOTE A
CUSTOMER PANEL MATERIAL:

1. WOOD: Ø4.5 HOLES THRU
FOR M4 SCREWS W/NUTS,
OR, NO THRU HOLES, SCREWS
FOR WOOD Ø4mm,

2. SHEET METAL: CONCEALED HEAD
THREADED STUDS M4 W/NUTS.

NOTE B

MONITOR INCLUDES 2 BRACKETS,
ADDITIONAL BRACKETS AVAILABLE,
P/N EI47211



NOTE C

49 mm = SECURE TOUCH
49.3mm = IR


RECOMMENDED
CUSTOMER PANEL
CUT-OUT

**REAR MOUNT WITH BRACKETS,
HORIZONTAL OR VERTICAL**


MOUNTING BRACKET ADJUSTMENT RANGE

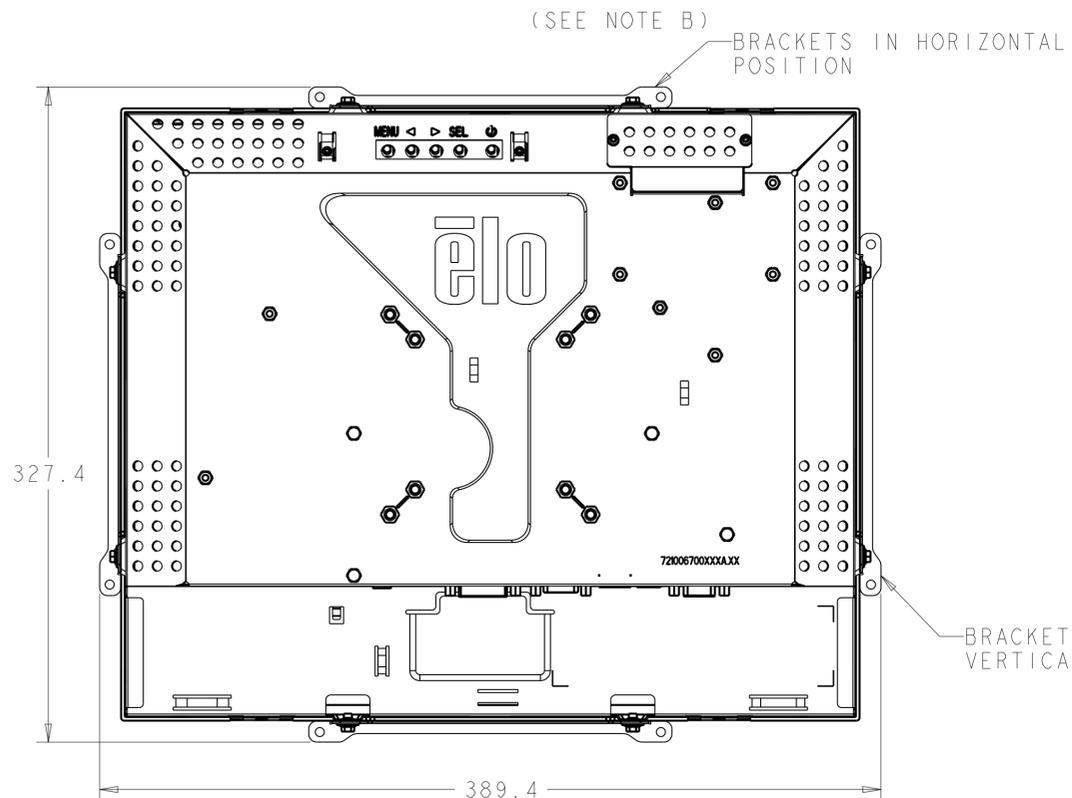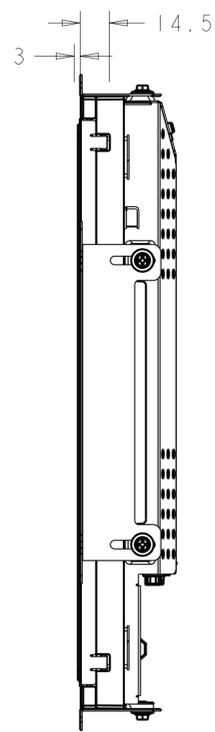


VESA MOUNT

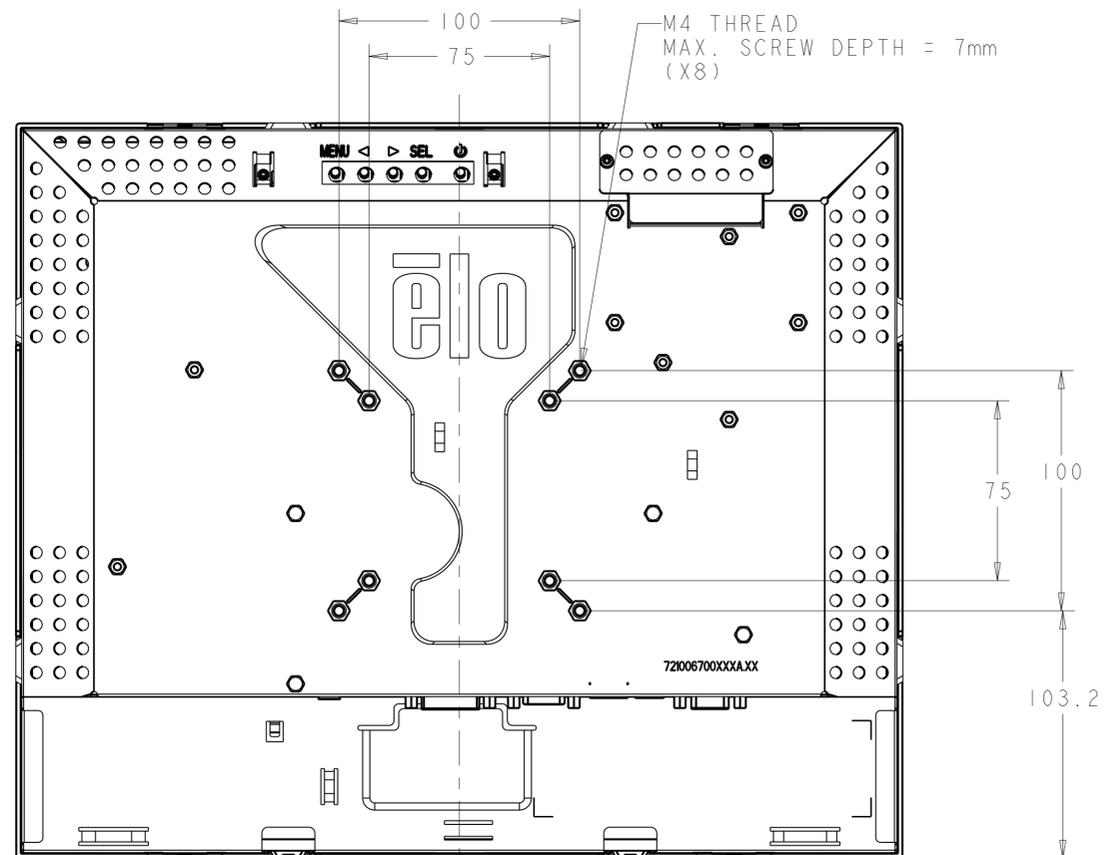

**SIDE MOUNT,
VERTICAL**


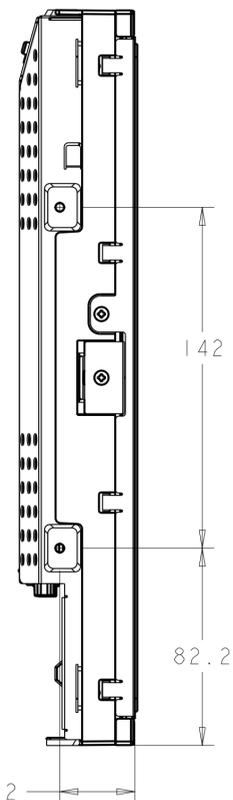


**SIDE MOUNT,
HORIZONTAL**

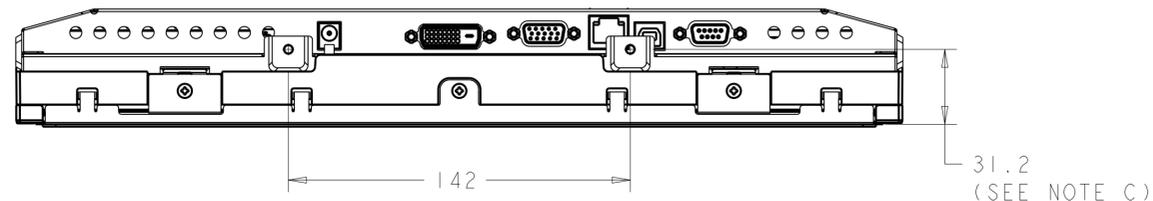


FRONT MOUNT OPTION
P/N E860319

(ORDERED SEPERATLY, CUSTOMER ASSEMBLED)


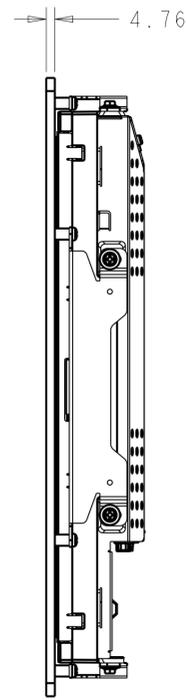
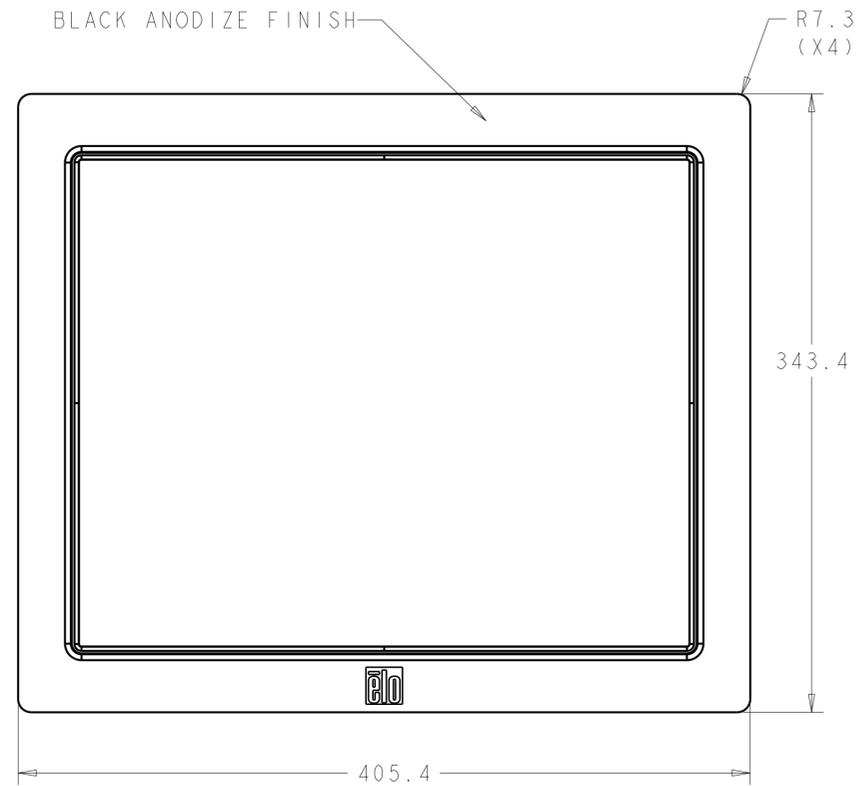


FRONT MOUNT BRACKETS (4)
 (INCLUDED WITH FRONT MOUNT ASSY.)

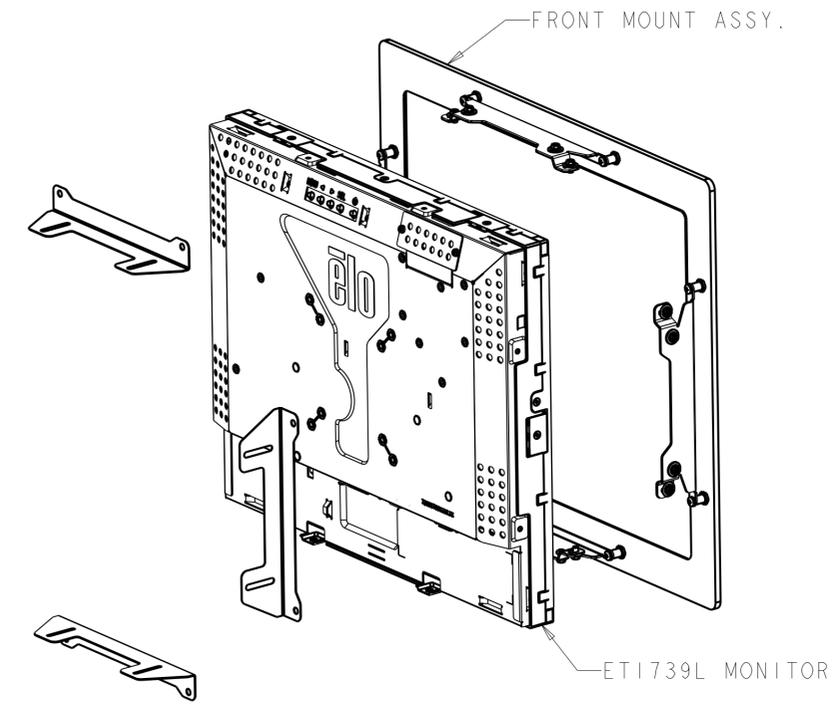

CUSTOMER PANEL;
 FRONT MOUNT BRACKETS ACCOMMODATE
 MAX. 14mm MATERIAL THICKNESS.



- NOTE:
 (X8) 1. IF CUSTOMER PANEL MATERIAL IS WOOD:
 Ø4.5mm HOLES THRU FOR M4 SCREWS,
 OR NO THRU HOLES, SCREWS FOR WOOD Ø4mm.
2. IF CUSTOMER PANEL MATERIAL IS SHEET METAL:
 CONCEALED HEAD THREADED STUDS M4 WITH NUTS.

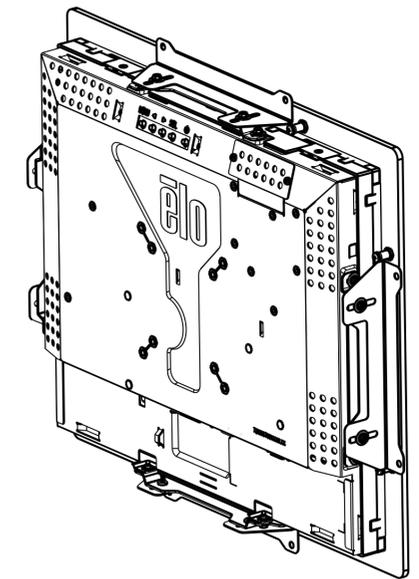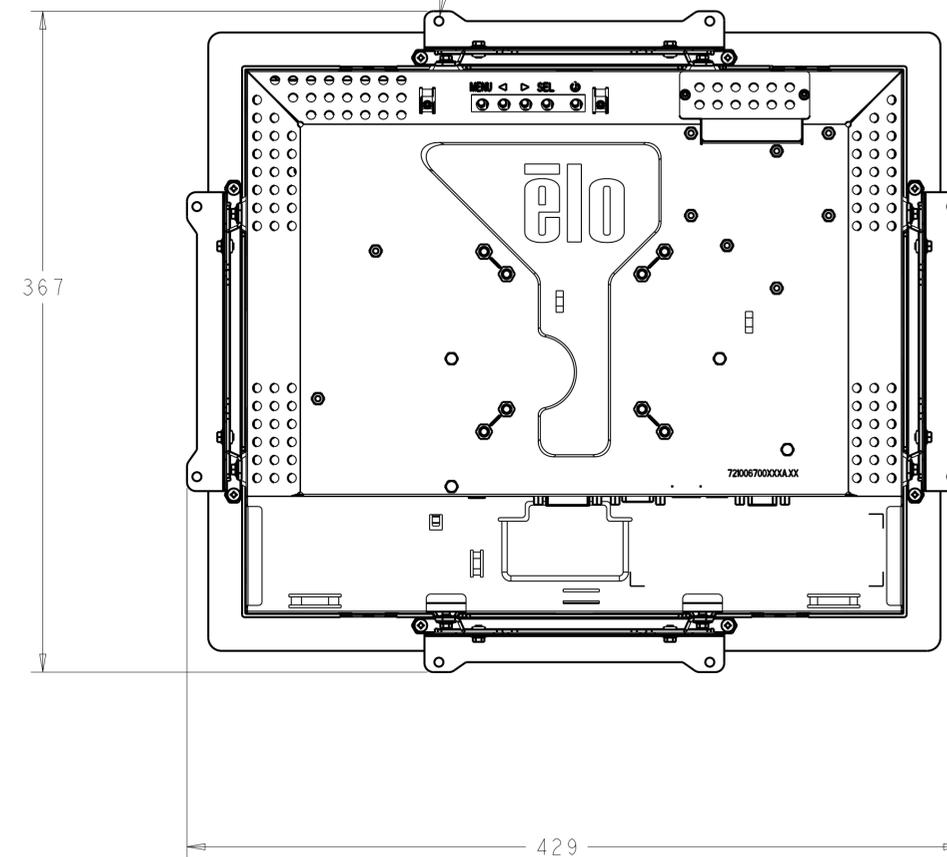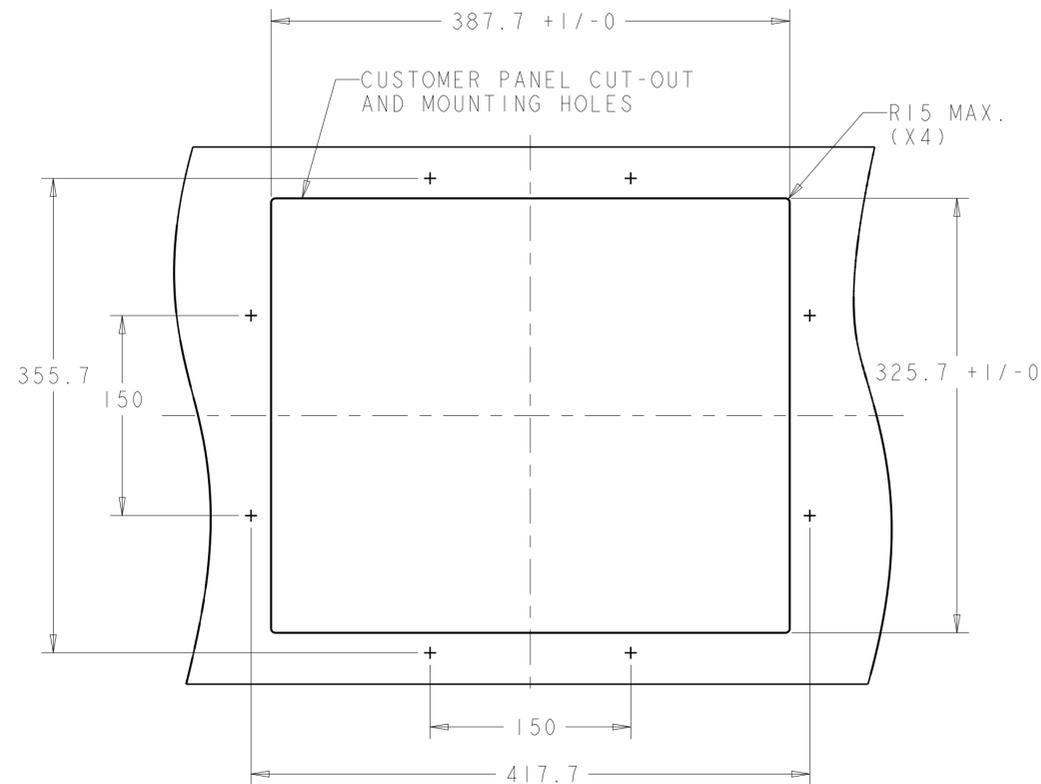




RACK MOUNT OPTION

P/N E939253





(ORDERED SEPERATLY, CUSTOMER ASSEMBLED)

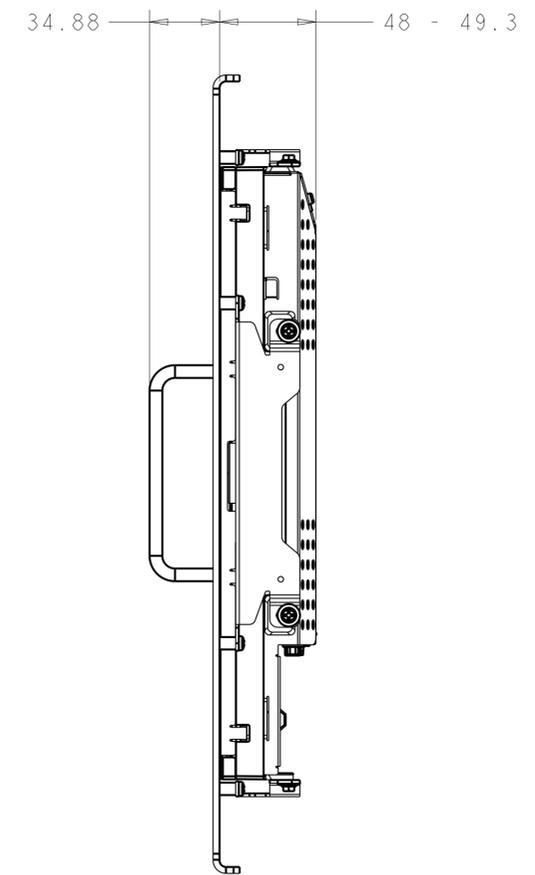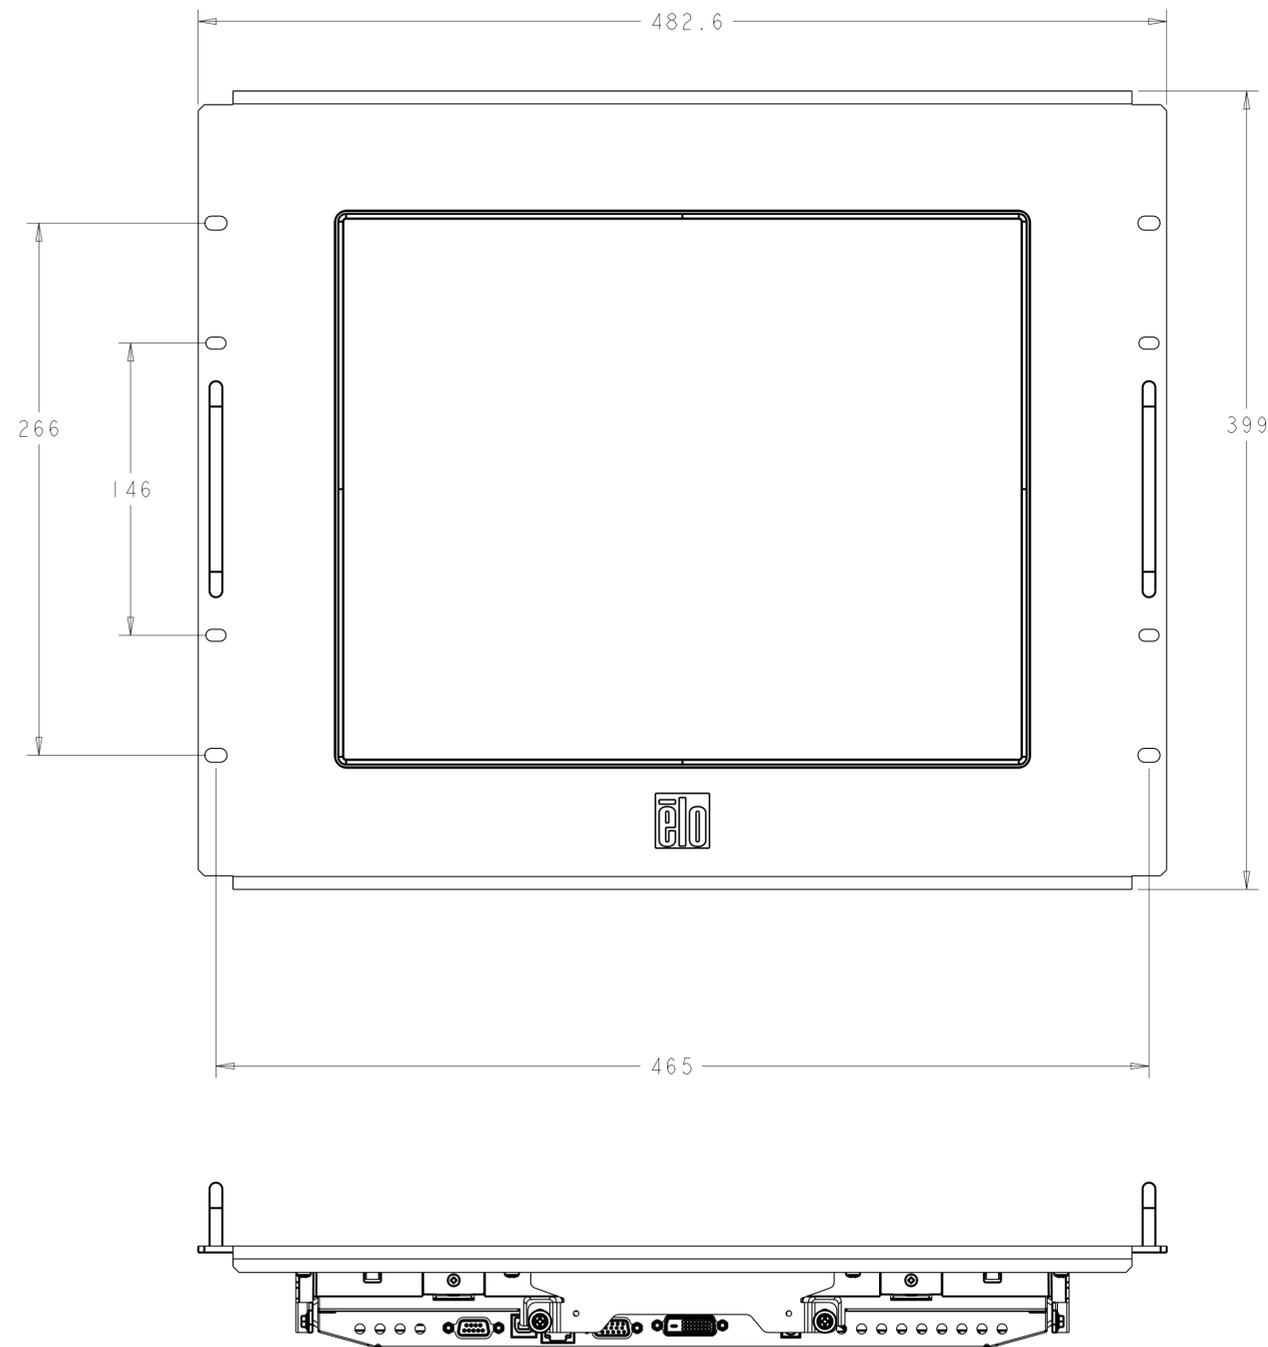




PROJECTED CAPACITIVE MODELS ONLY

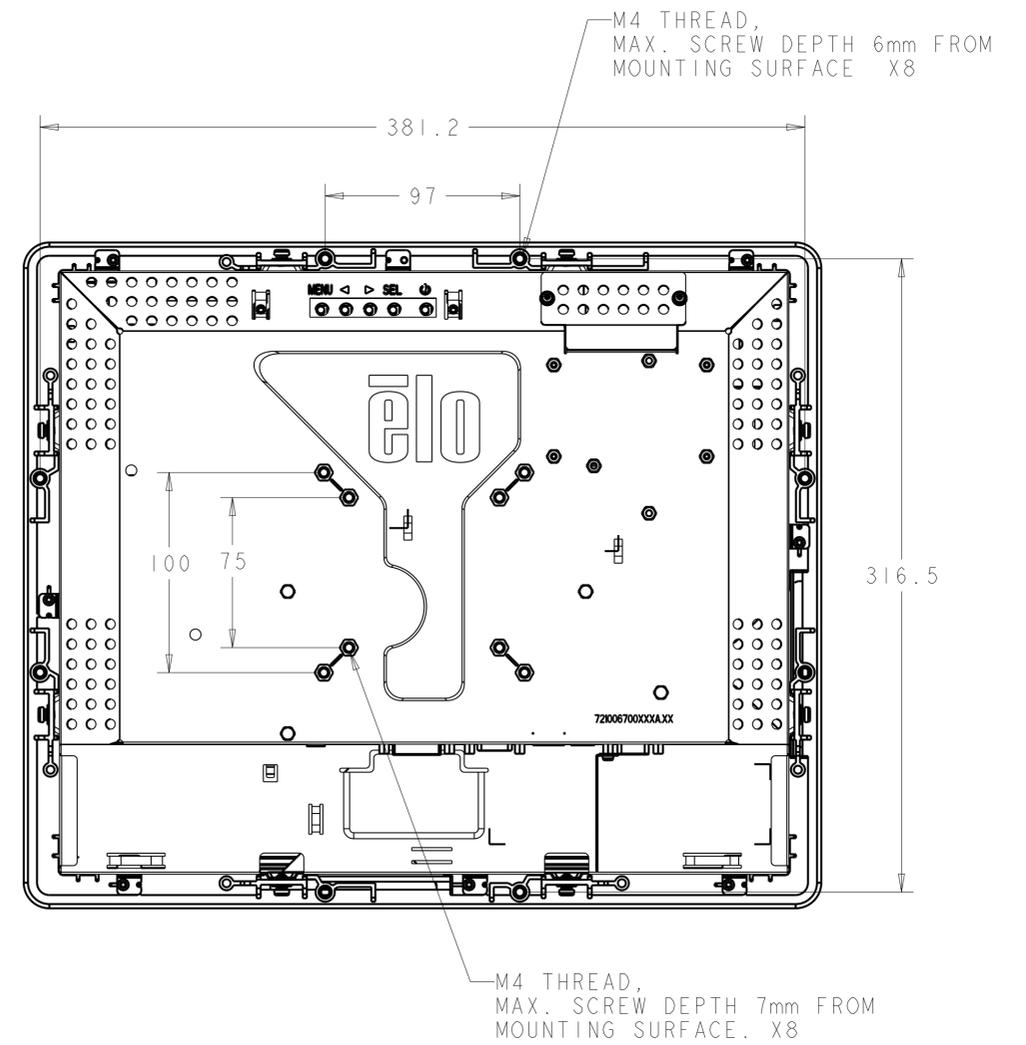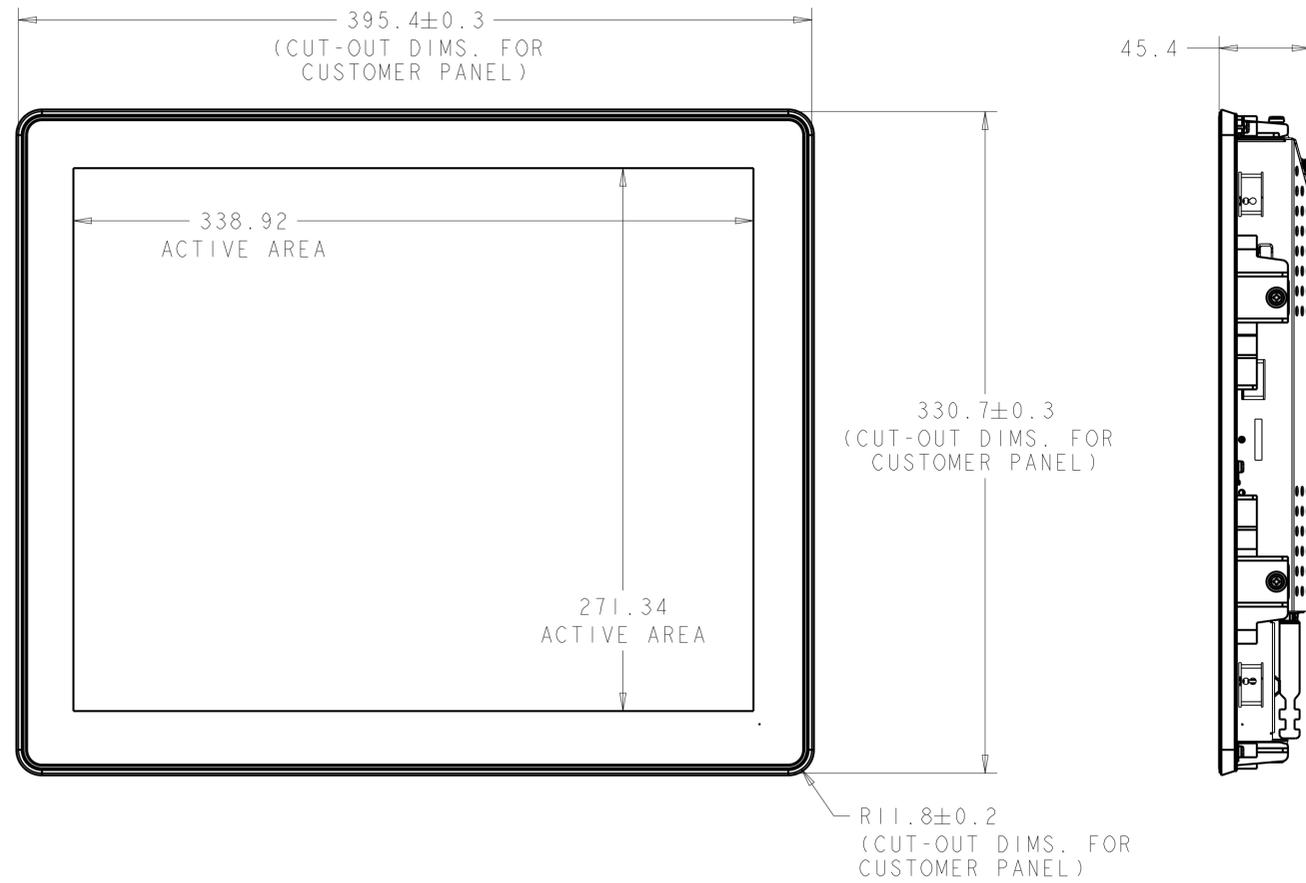

1739 iTouch/ No Touch Open-Frame ZB

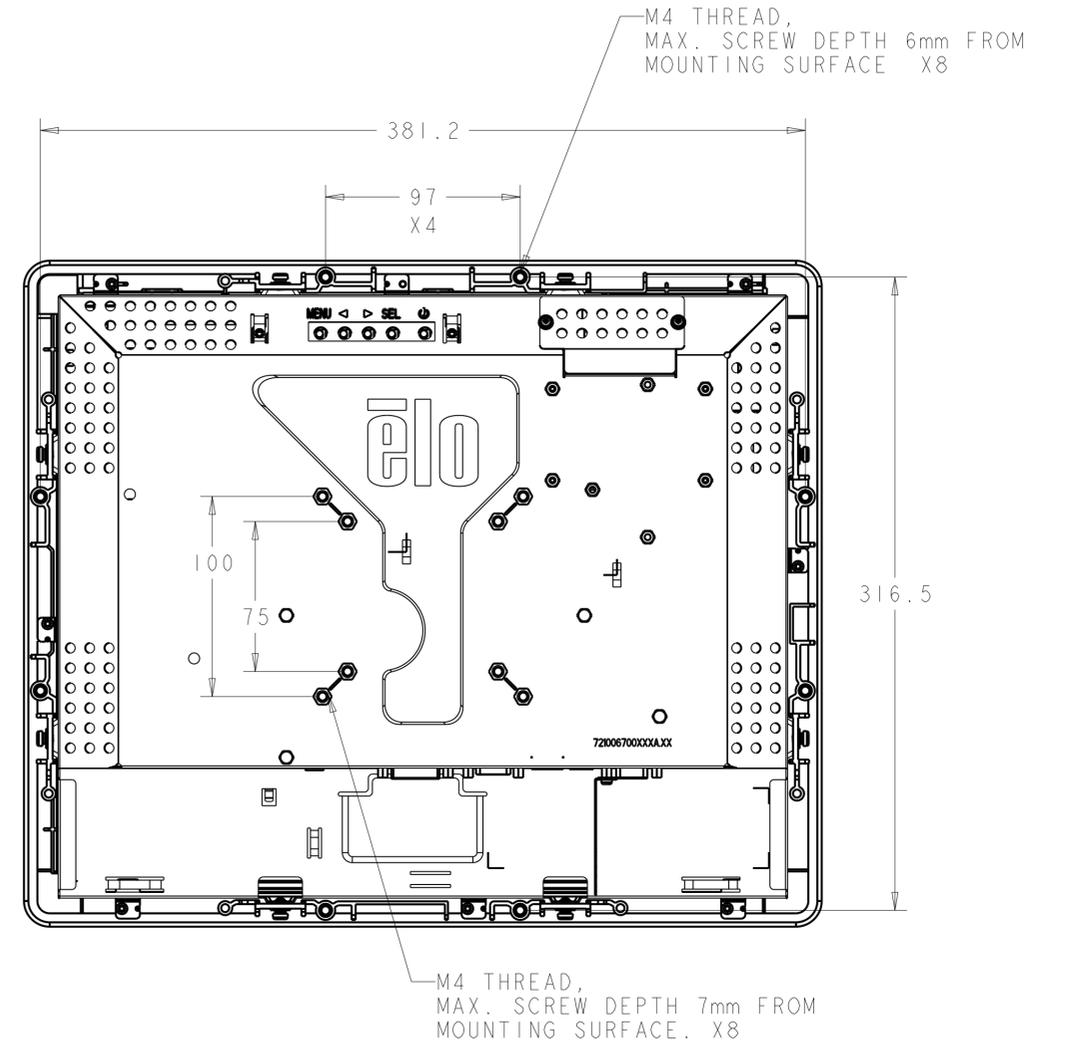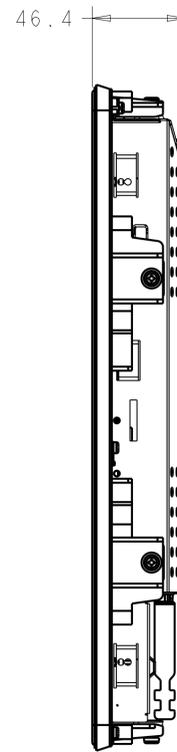
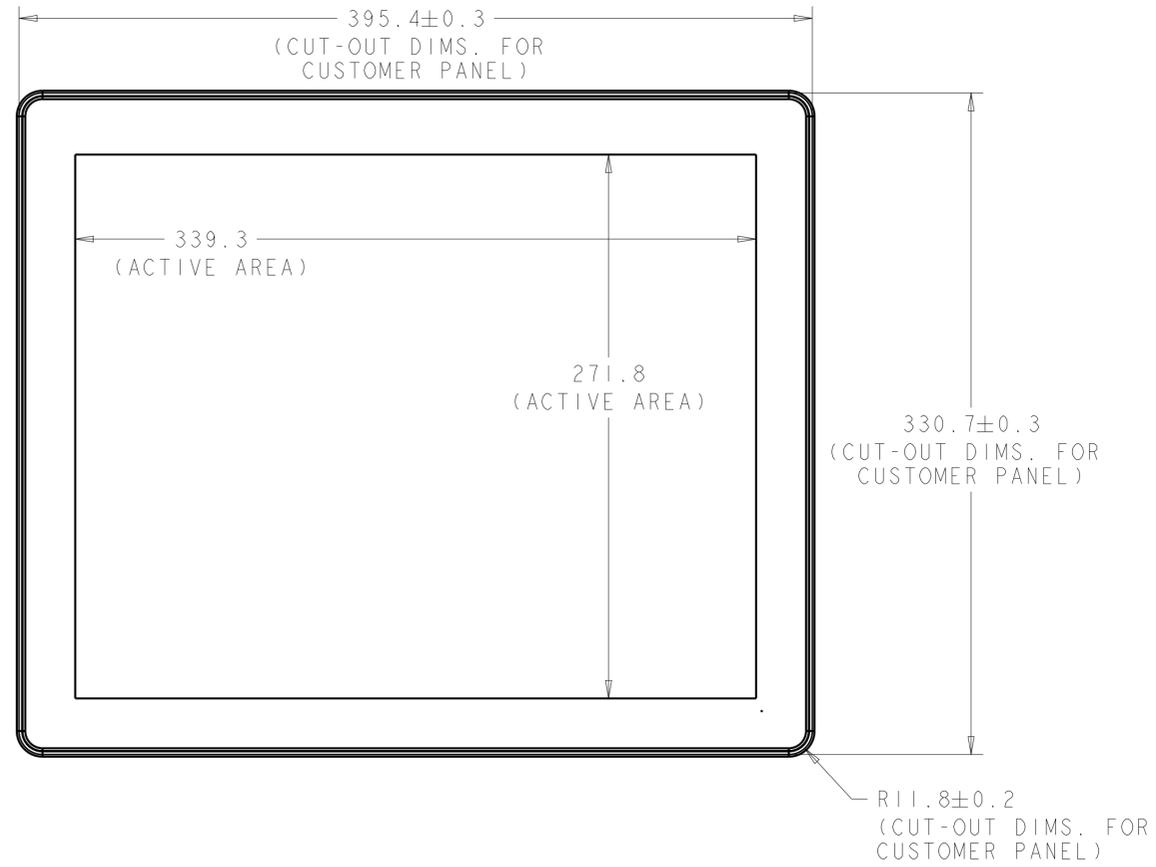


**PROJECTED CAPACITIVE/iTOUCH/NO TOUCH ZB MODELS
FLUSH MOUNTING
P/N E129564**

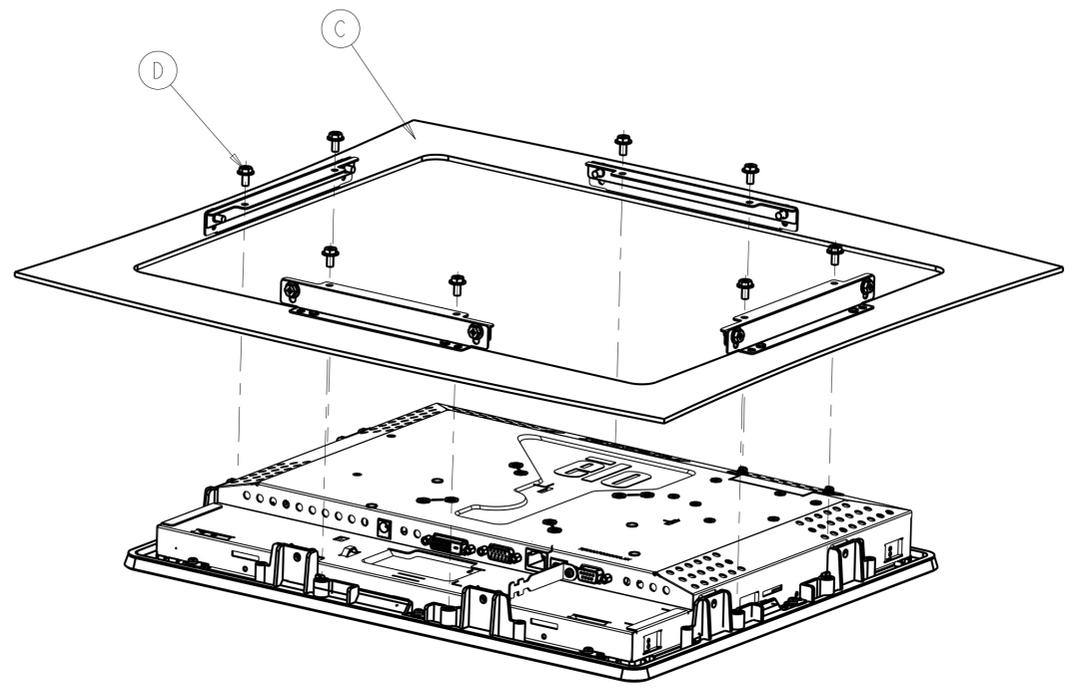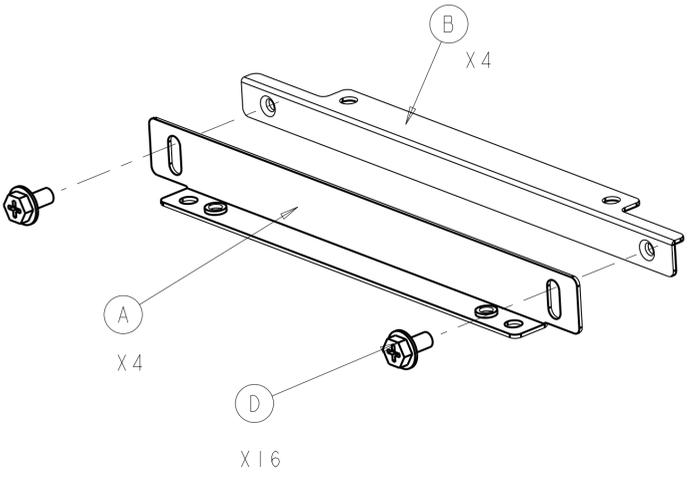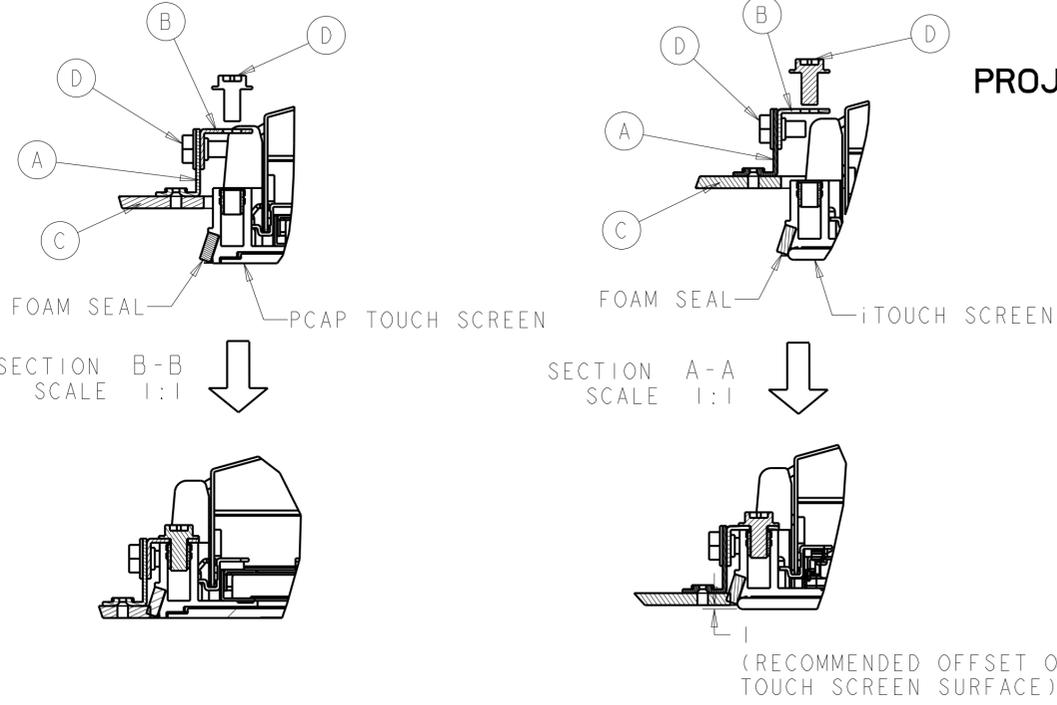

- FLUSH MOUNT INSTALLATION NOTES:**
1. ATTACH BRACKET "A" TO CUSTOMER PANEL "C" PER DRAWING
 2. ATTACH BRACKET "B" TO BRACKET "A" WITH M4 SCREWS "D" (INCLUDED)
 3. PLACE TOUCH MONITOR INTO CUSTOMER PANEL OPENING, TAKING CARE NOT TO DAMAGE FOAM SEAL
 4. ADJUST DEPTH OF BRACKETS "B" SO MONITOR IS FLUSH WITH CUSTOMER PANEL FOR PCAP, SLIGHTLY PROUND OF CUSTOMER PANEL ABOUT IMM FOR ITOUCH
 5. SECURE TOUCH MONITOR TO BRACKET "B" FROM BEHIND WITH M4 SCREWS "D" (INCLUDED)

RECOMMENDED CUSTOMER PANEL CUT-OUT

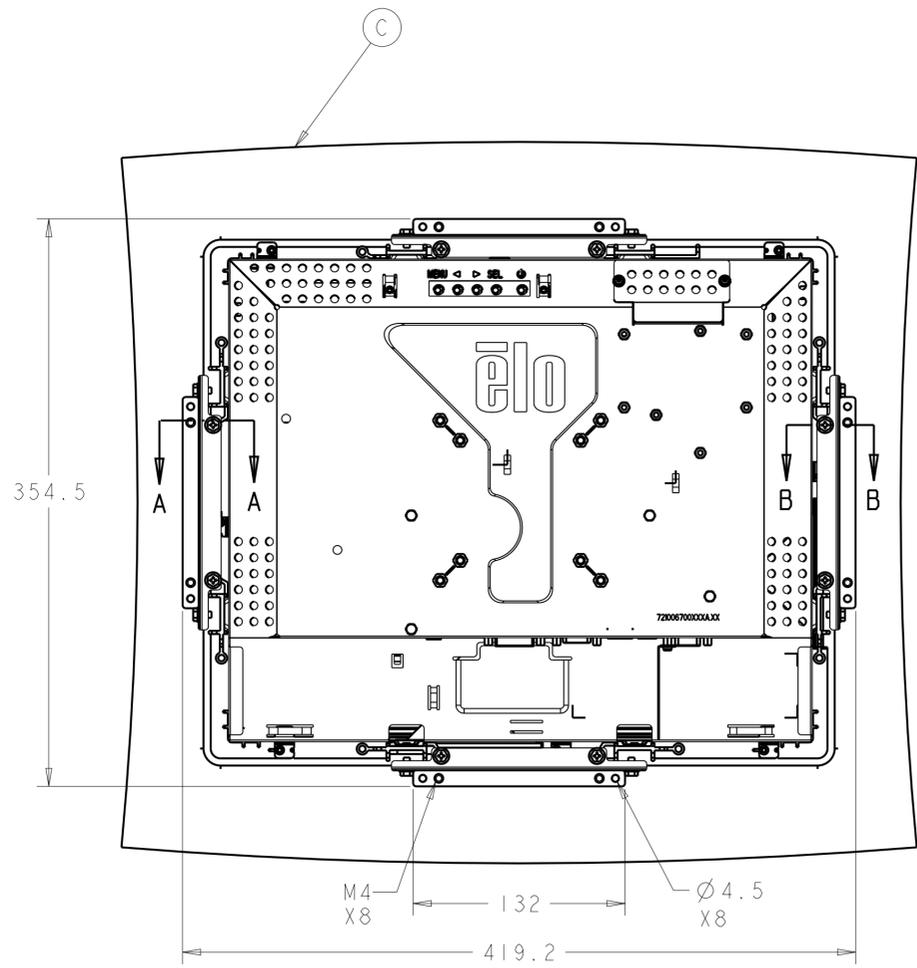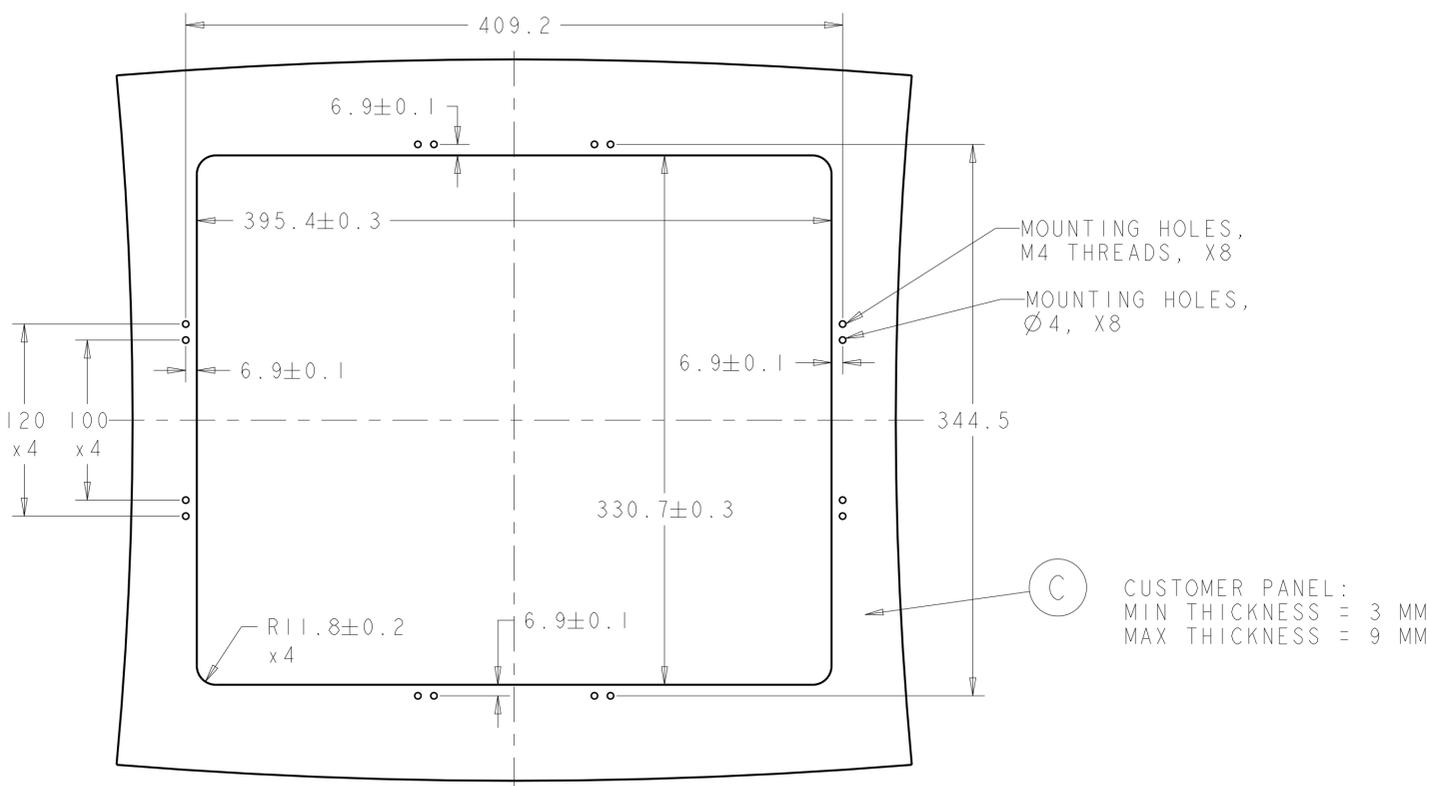

CUSTOMER PANEL:
MIN THICKNESS = 3 MM
MAX THICKNESS = 9 MM

DIMENSIONS ARE IN MILLIMETERS