

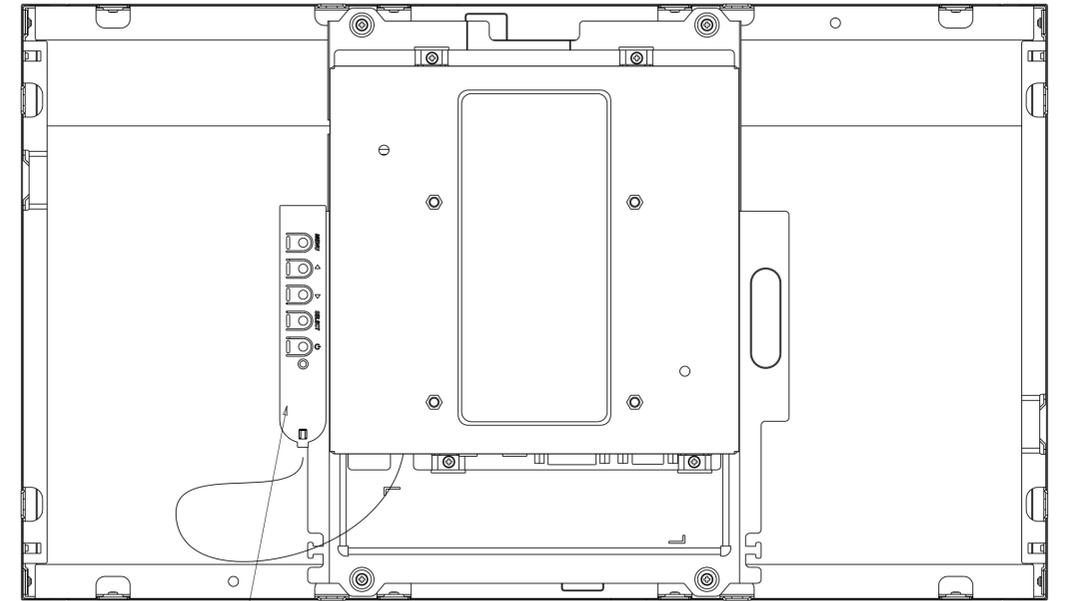
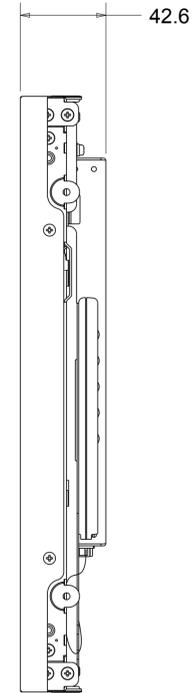


NOTE:  
ALL DIMS. +/- 1mm UNLESS NOTED



INTELLITOUCH MODELS ONLY

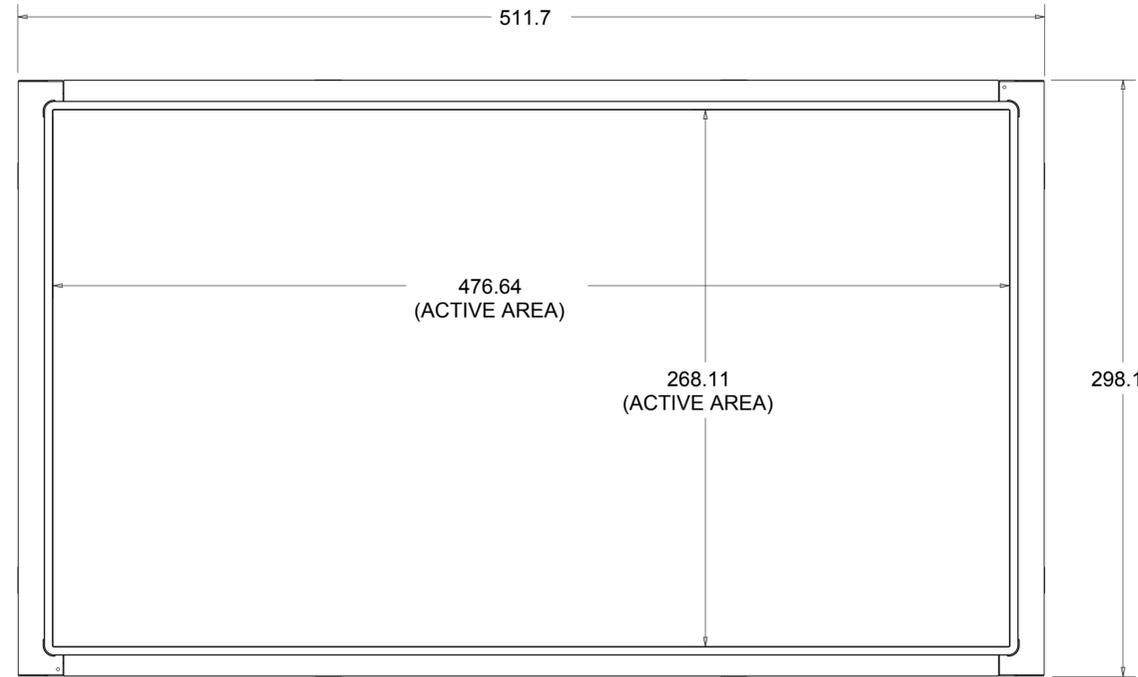

OSD CONTROL WITH MAGNETIC ATTACHMENT;  
CABLE LENGTH = 280mm




POWER STATUS LED

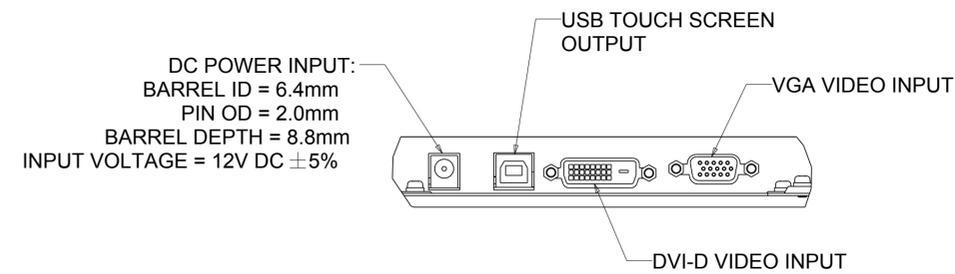


TITLE: 2243L / 2244L

INTELLITOUCH MODELS ONLY

M4 THREAD,  
MAX. SCREW DEPTH 7mm FROM  
MOUNTING SURFACE. X4

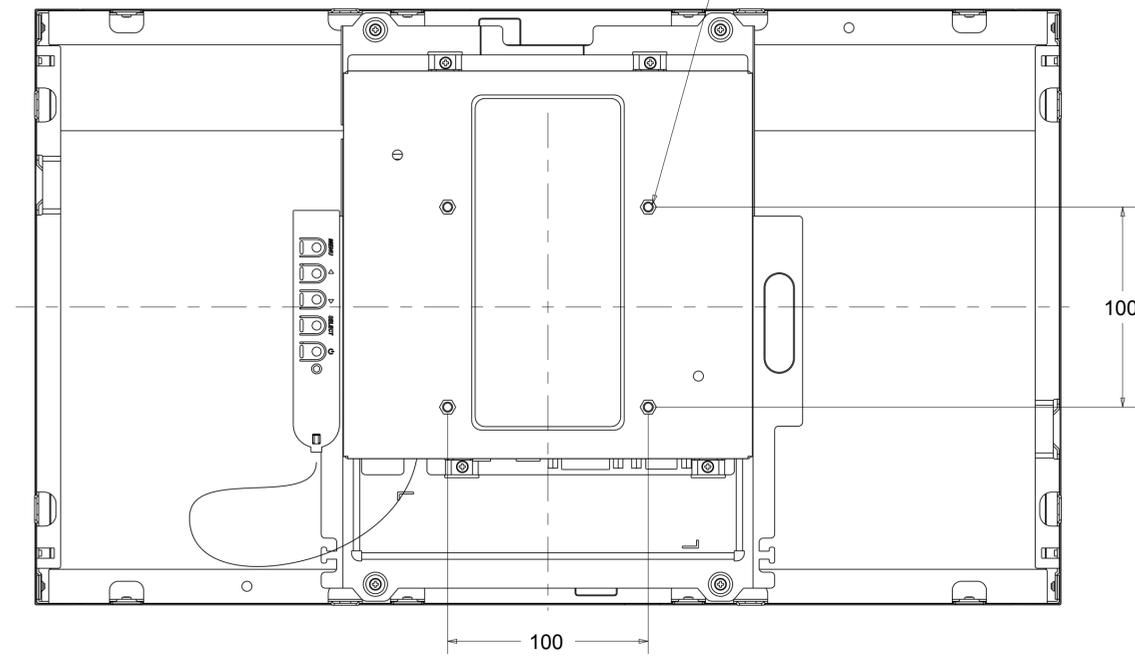


VESA MOUNT

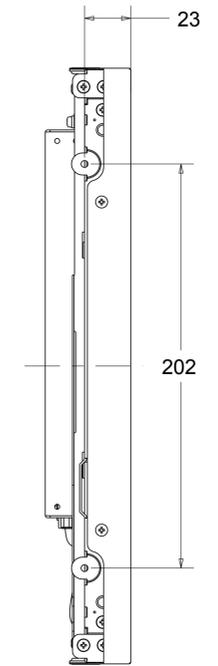

SIDE MOUNT, VERTICAL (LEFT & RIGHT)

M4 THREAD, MAX. SCREW DEPTH 8mm,  
X8

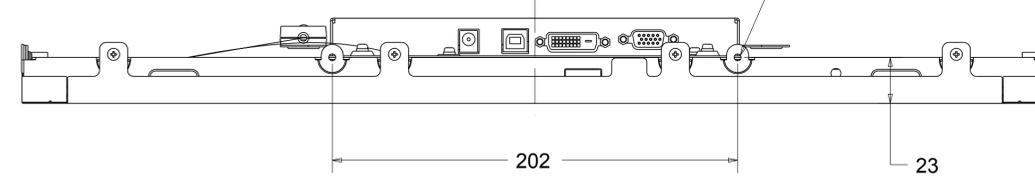

SIDE MOUNT, HORIZONTAL (TOP & BOTTOM)

DIMENSIONS ARE IN MILLIMETERS


elo TOUCH SOLUTIONS

MS601132



DATE: 10/25/2012

REV: E

MOUNTING WITH ADJUSTABLE BRACKETS  
(4 PROVIDED)

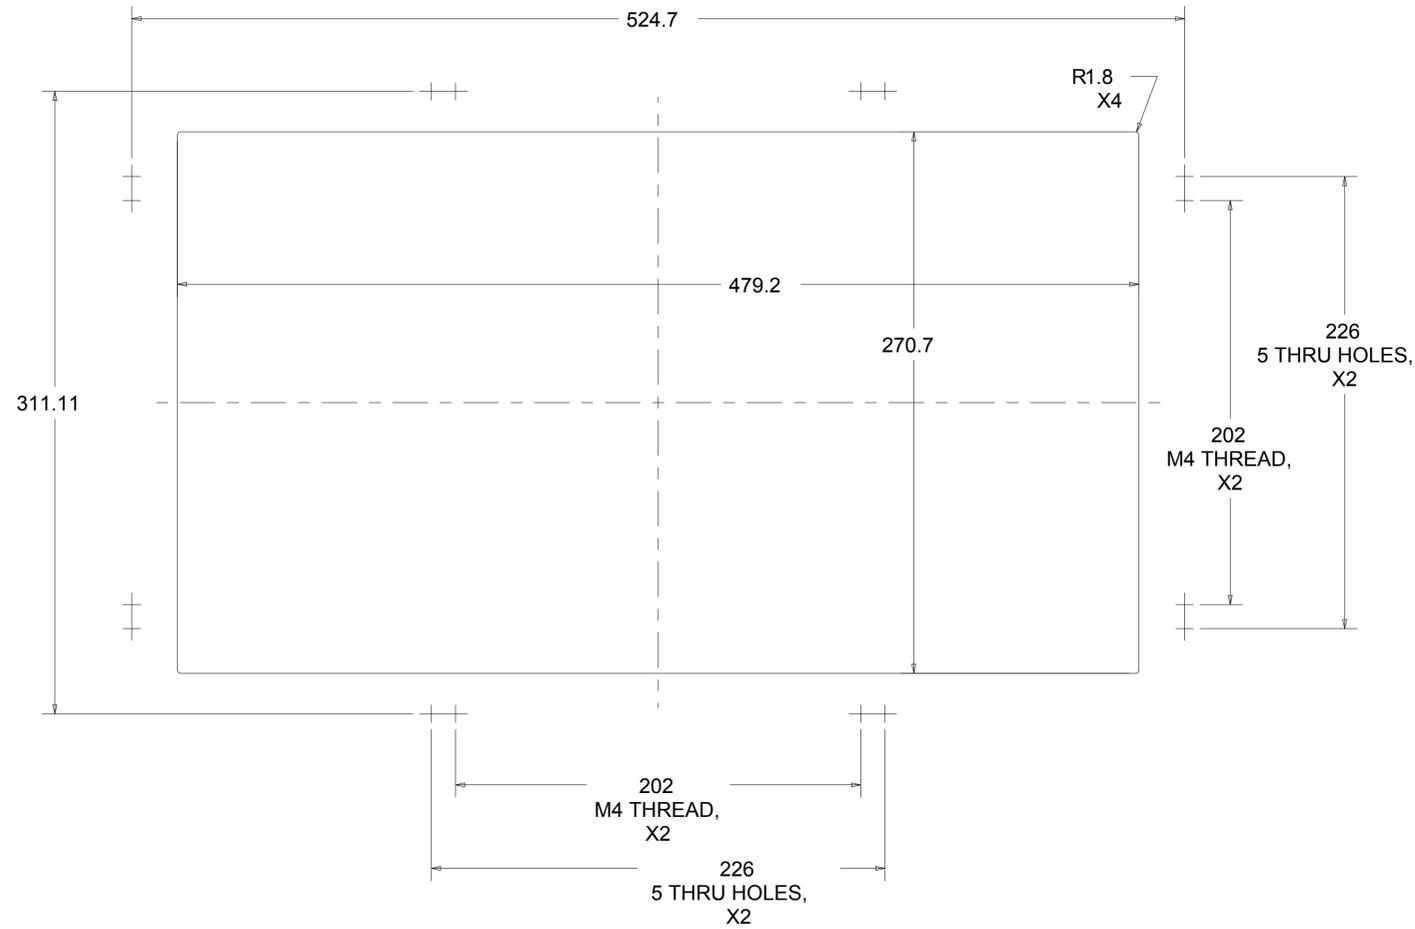


RECOMMENDED CUSTOMER  
PANEL CUT-OUT

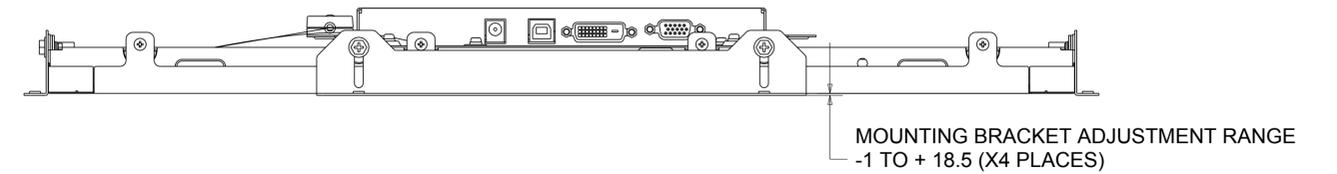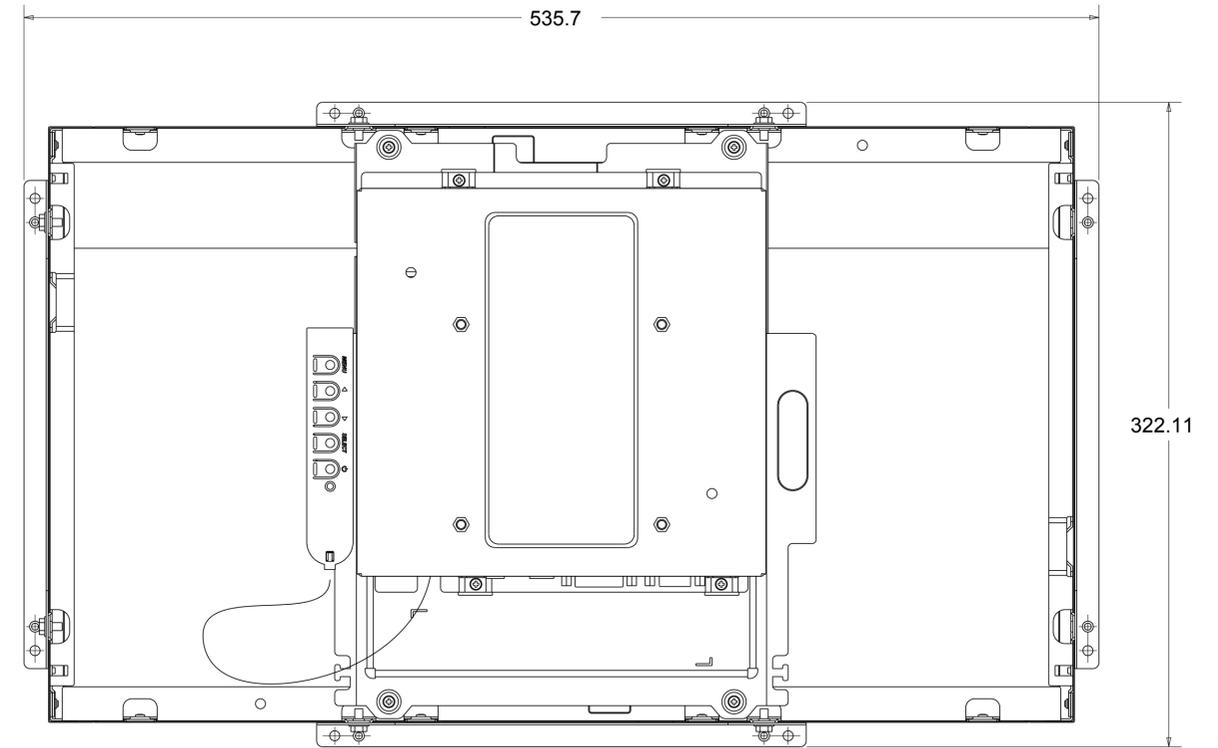


INTELLITOUCH MODELS ONLY

OPTIONAL FRONT MOUNT BEZEL KIT P/N E668194  
 ORDERED SEPARATELY, CUSTOMER ASSEMBLED)

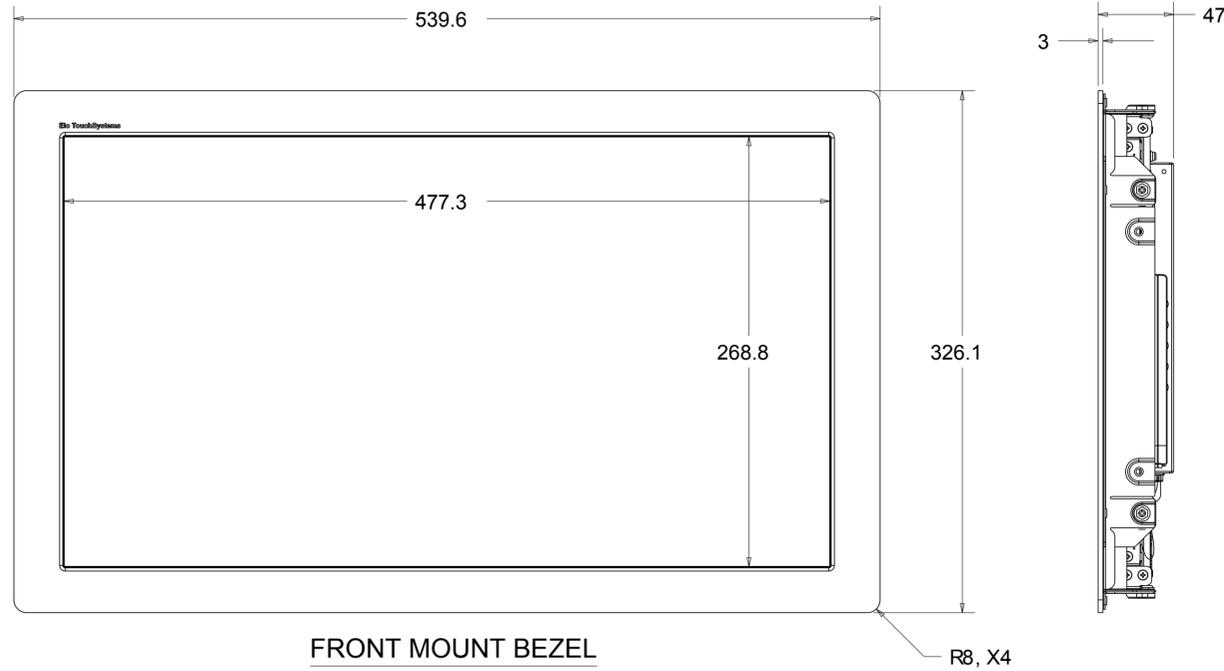

FRONT MOUNT BEZEL


R8, X4

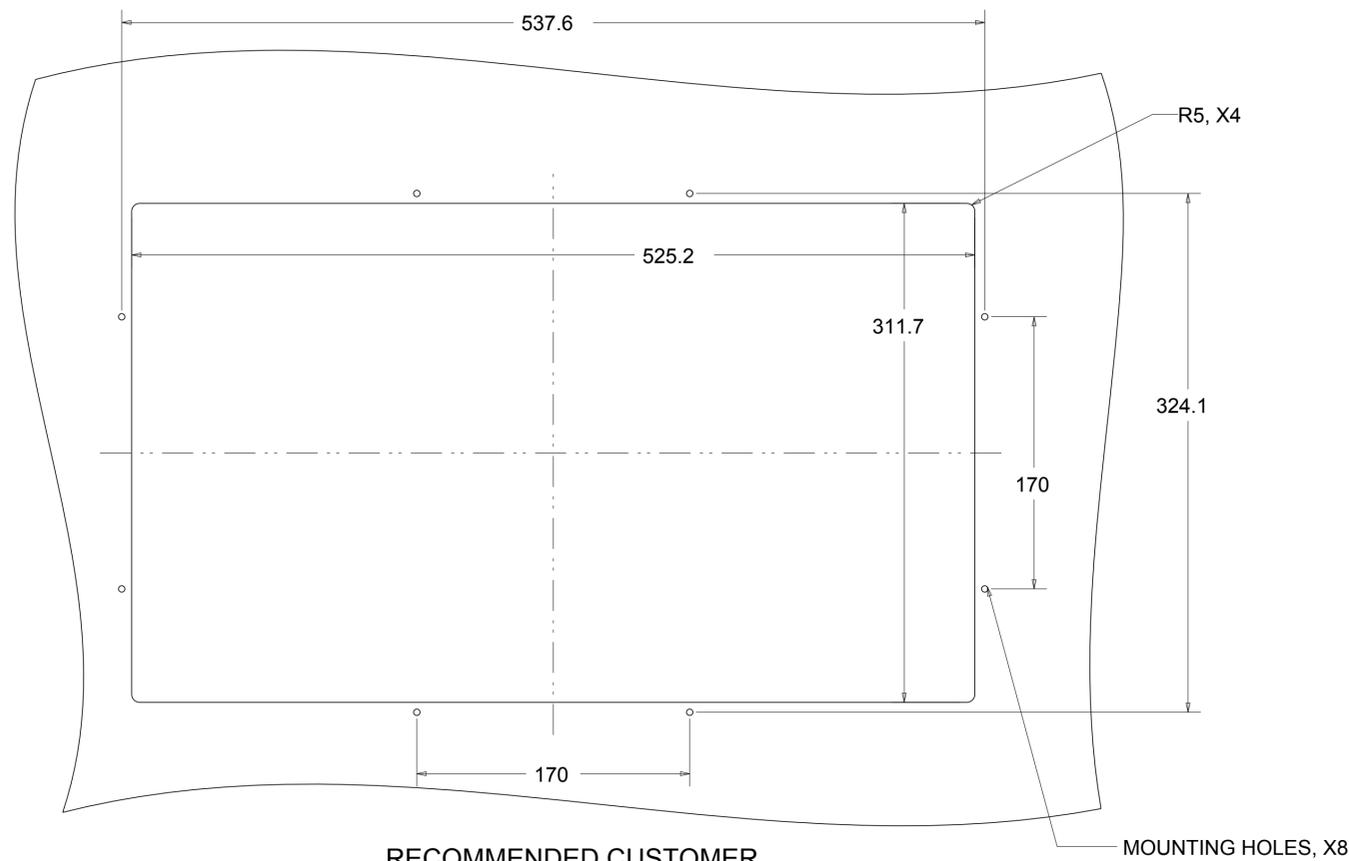

RECOMMENDED CUSTOMER  
 PANEL CUT-OUT

MOUNTING HOLES, X8



1. IF CUSTOMER PANEL IS WOOD,  
 Ø 4.5MM THRU HOLES FOR M4 SCREWS  
 OR NO THRU HOLES, SCREWS FOR WOOD Ø 4MM
2. IF CUSTOMER PANEL IS SHEET METAL,  
 CONCEALED HEAD THREADED STUDS M4 WITH NUTS

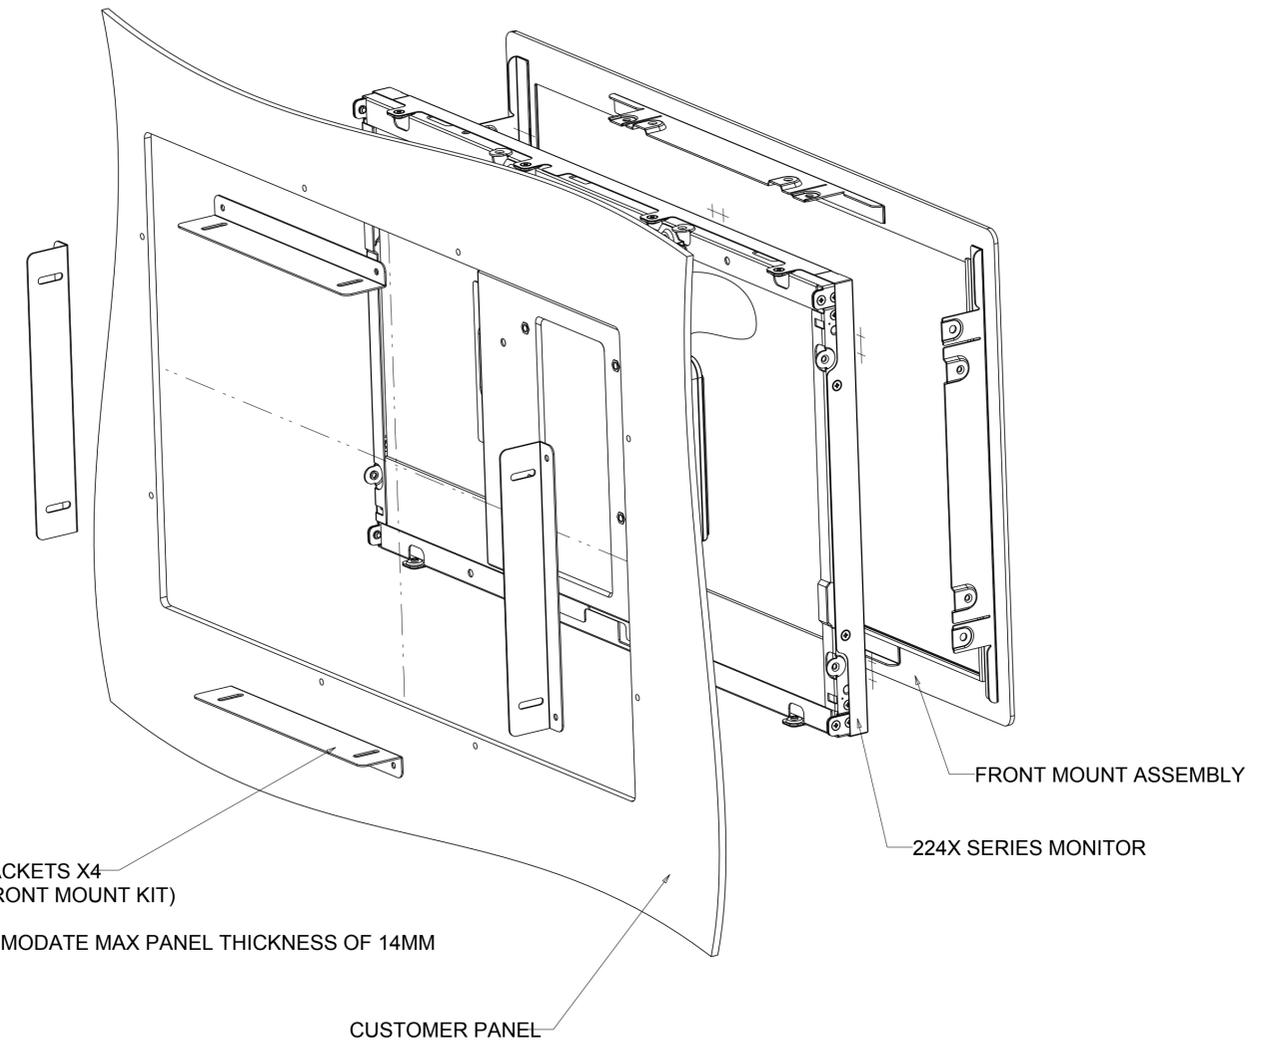

TITLE: 2243/2244L

INTELLITOUCH MODELS ONLY

OPTIONAL RACK MOUNT KIT P/N E462672  
ORDERED SEPARATELY, CUSTOMER ASSEMBLED)

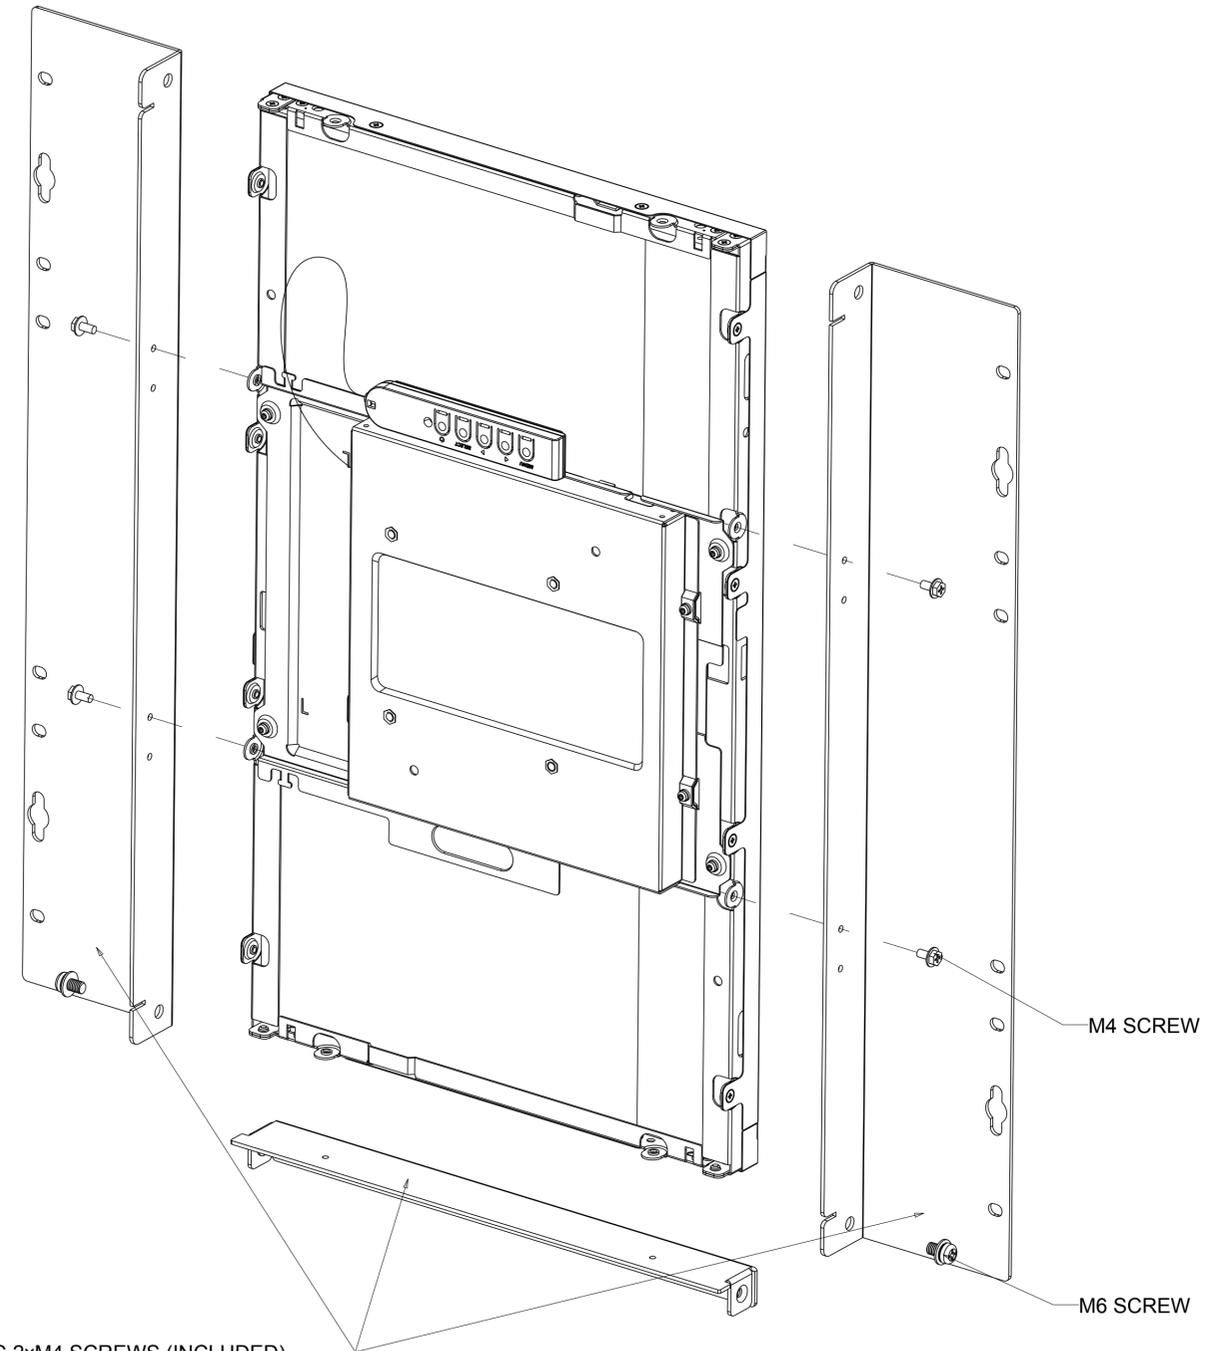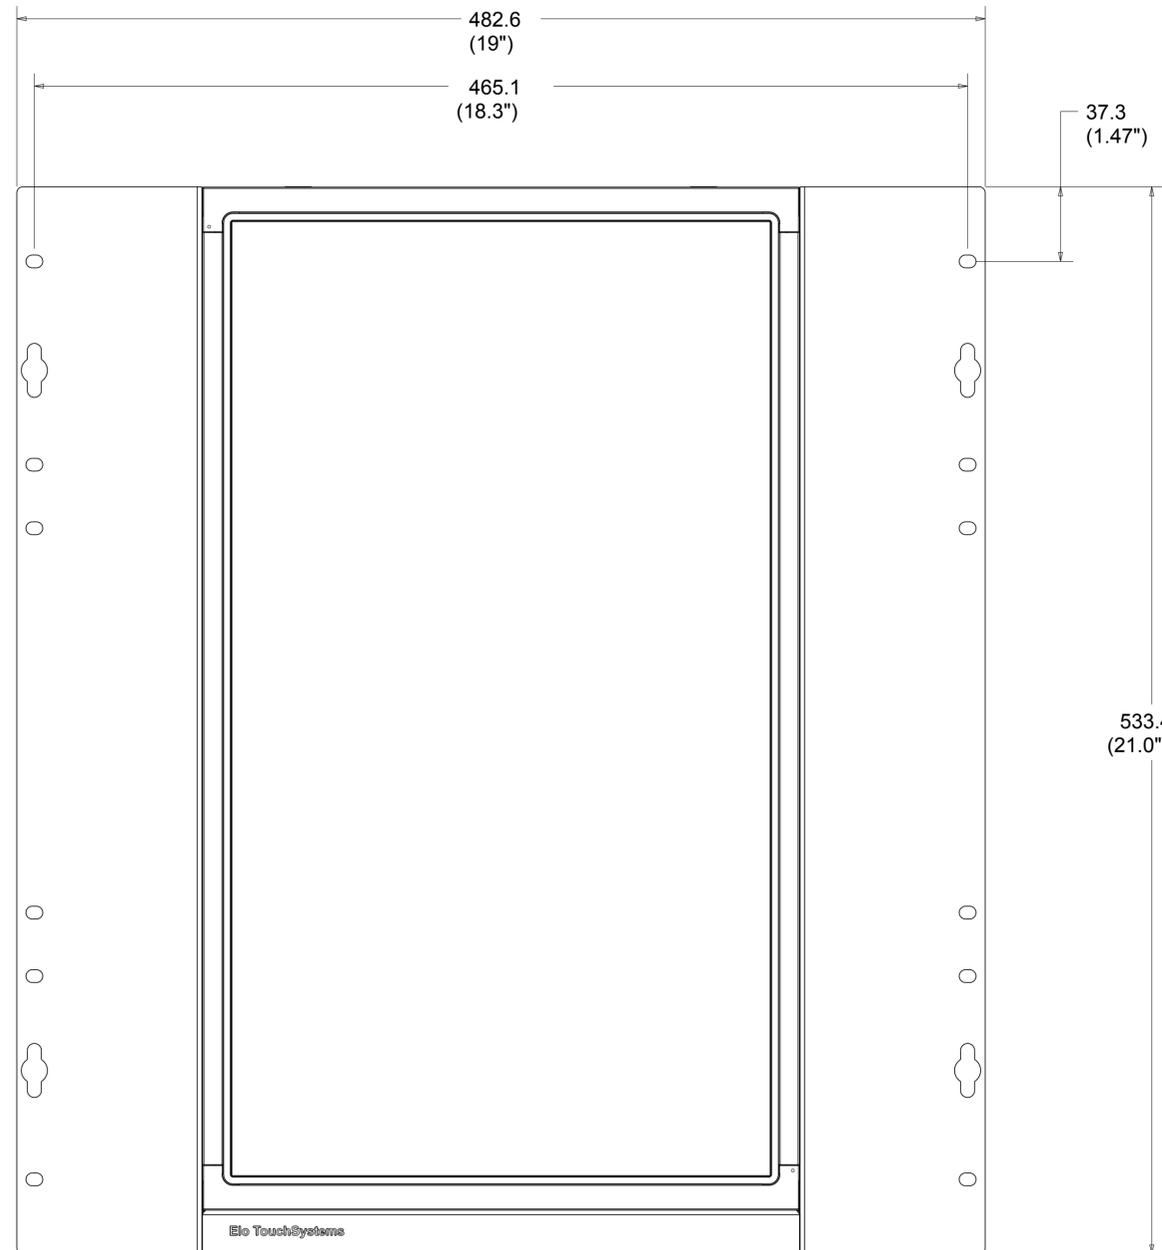

NOTE:  
1. MONITOR IS ORIENTED IN PORTRAIT MODE  
2. REQUIRES 12U OF RACK SPACE  
3. MOUNTING HOLES SPACING PER EIA-310-D

1. INSTALL BOTTOM BRACKET FIRST USING 2xM4 SCREWS (INCLUDED)  
2. INSTALL SIDE BRACKETS USING M4 AND M6 SCREWS (INCLUDED)




DIMENSIONS ARE IN MILLIMETERS

elo TOUCH SOLUTIONS


MS601132

DATE: 10/25/2012



REV: E

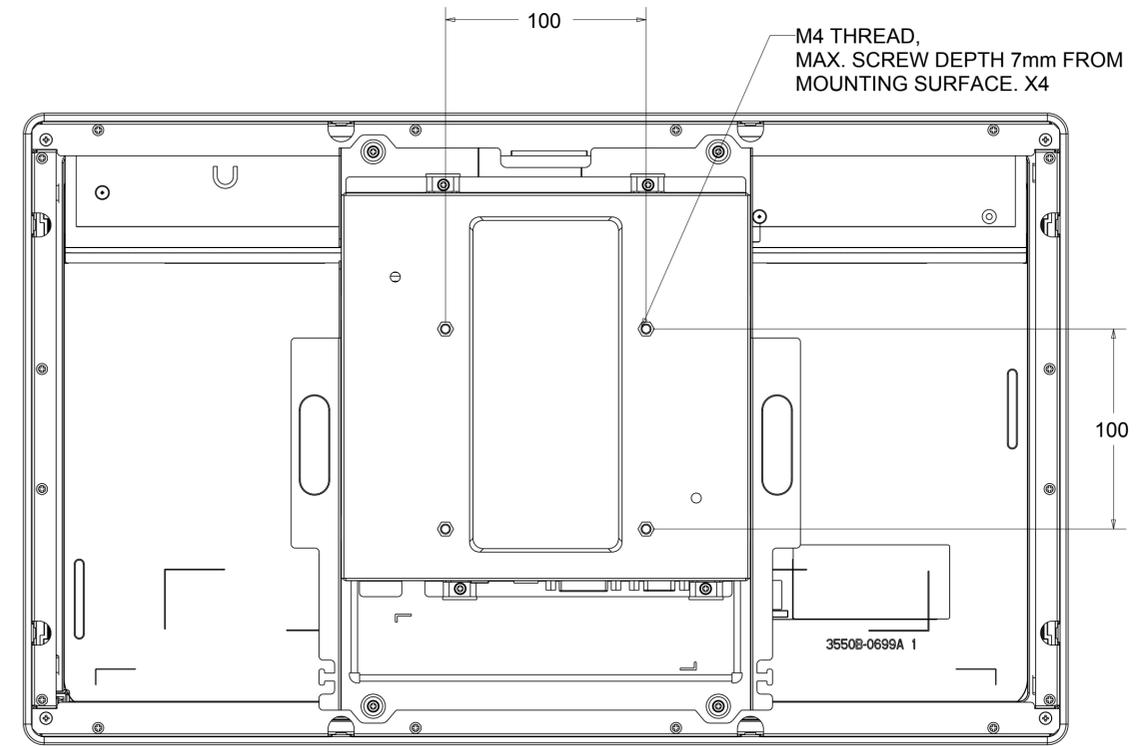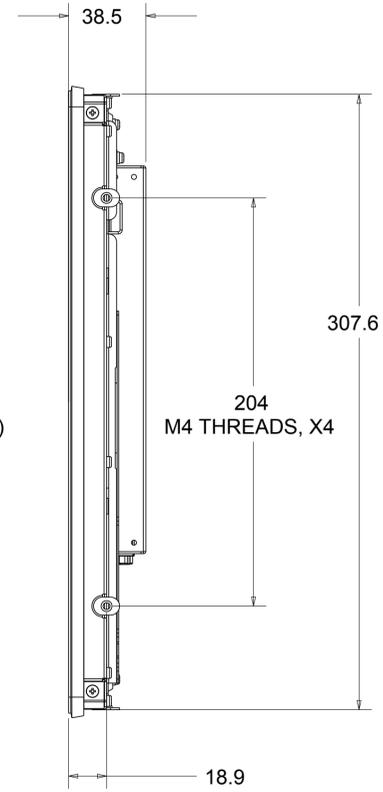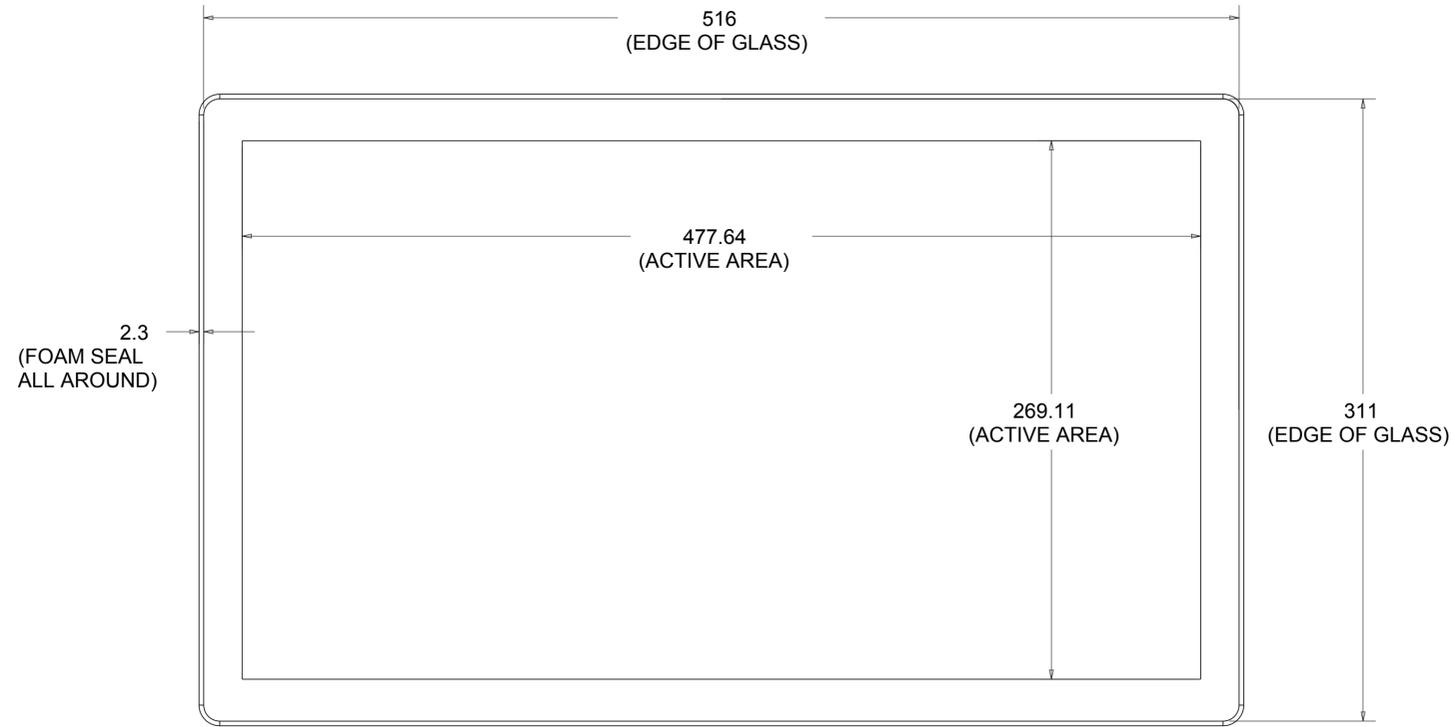

VESA MOUNT

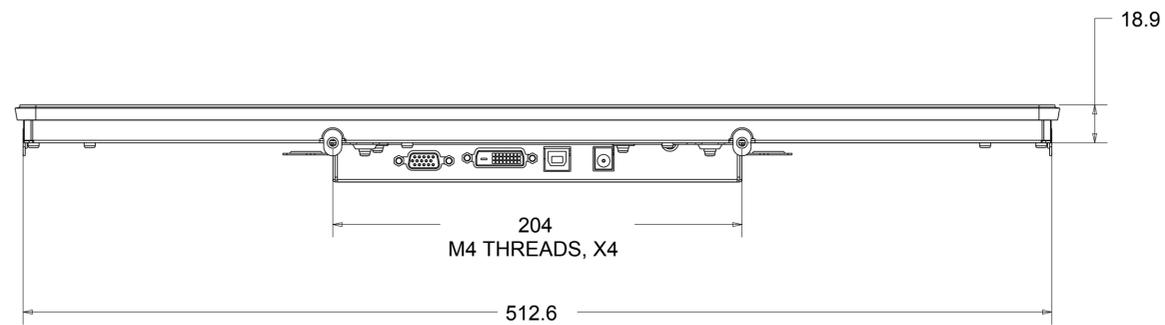


PROJECTED CAPACITIVE MODELS ONLY

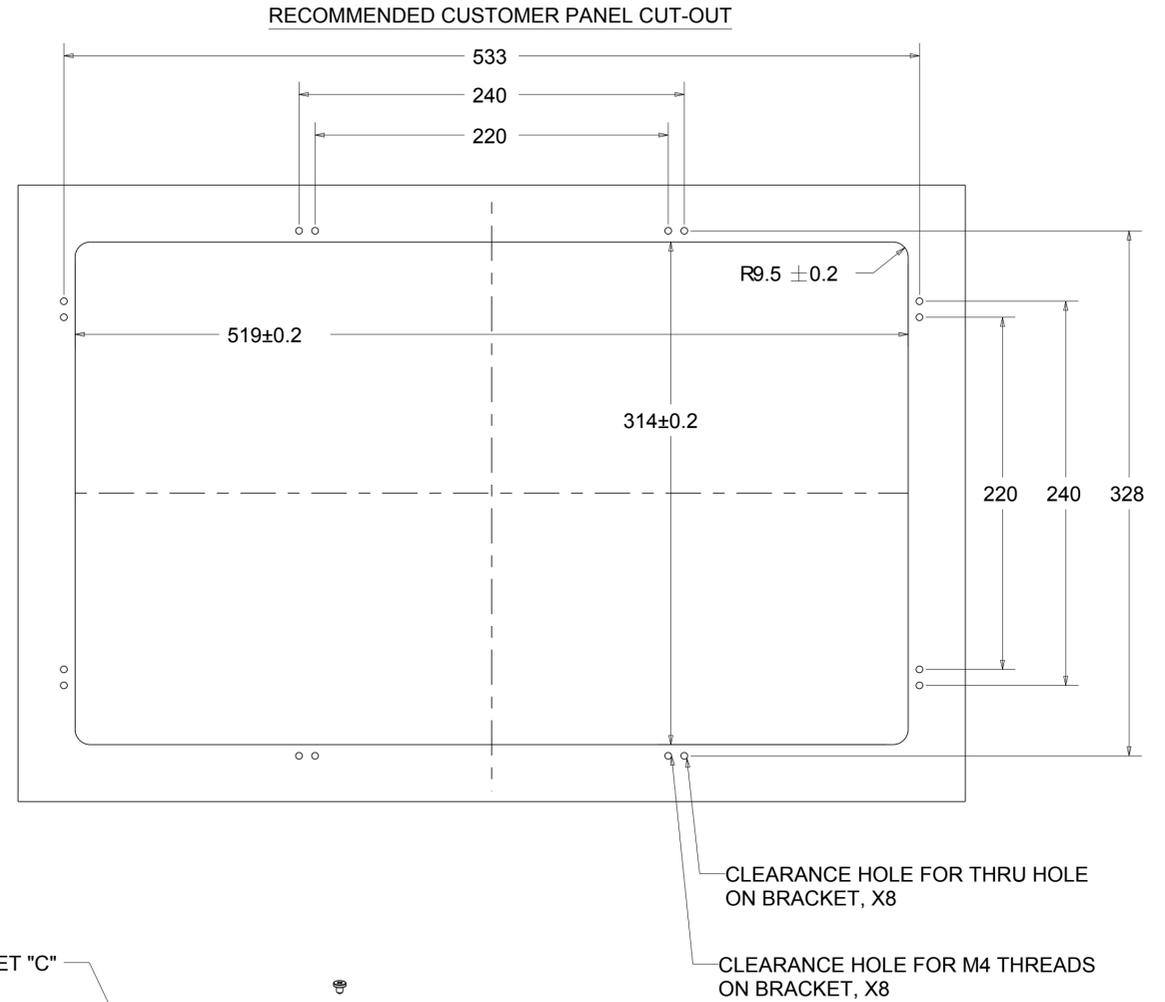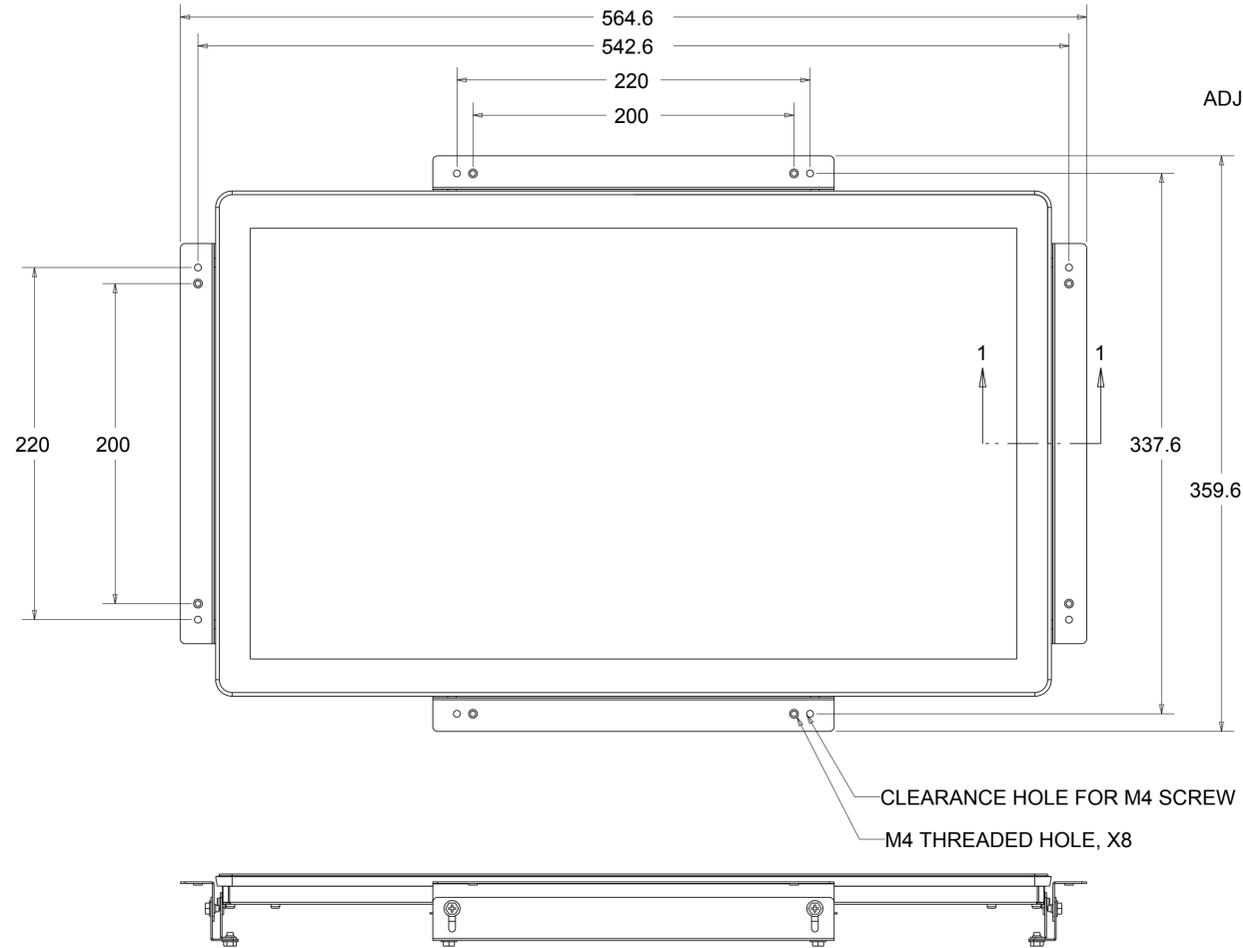


- INSTALLATION NOTES:
1. ATTACH BRACKET "A" TO TOUCHMONITOR WITH M4 LOW PROFILE SCREWS (INCLUDED)
  2. ATTACH BRACKET "C" TO CUSTOMER PANEL PER DRAWING
  3. ATTACH BRACKET "B" TO BRACKET "C" WITH M4 HEX HEAD SCREWS (INCLUDED)
  4. ADJUST DEPTH OF BRACKET "B" SO MONITOR IS FLUSH WITH CUSTOMER PANEL.
  5. PLACE TOUCHMONITOR INTO CUSTOMER PANEL OPENING TAKING CARE NOT TO DAMAGE FOAM SEAL
  6. SECURE TOUCHMONITOR TO BRACKET "B" FROM BEHIND WITH M4 HEX HEAD SCREWS (INCLUDED)

TOUCHSCREEN SURFACE  
CAUTION: WHEN ASSEMBLED, TOUCHSCREEN SURFACE MUST NOT PROTRUDE BEYOND CUSTOMER PANEL SURFACE ANYWHERE AROUND BORDER OF SCREEN

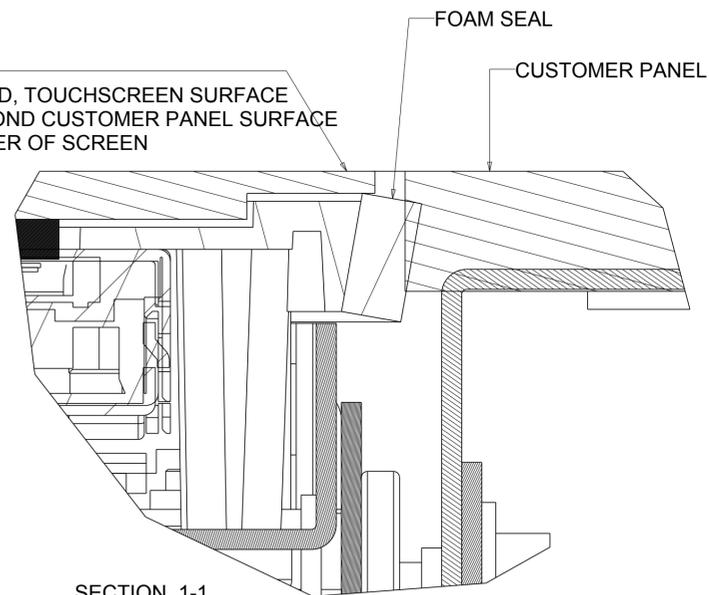

SECTION 1-1  
SCALE 5.000

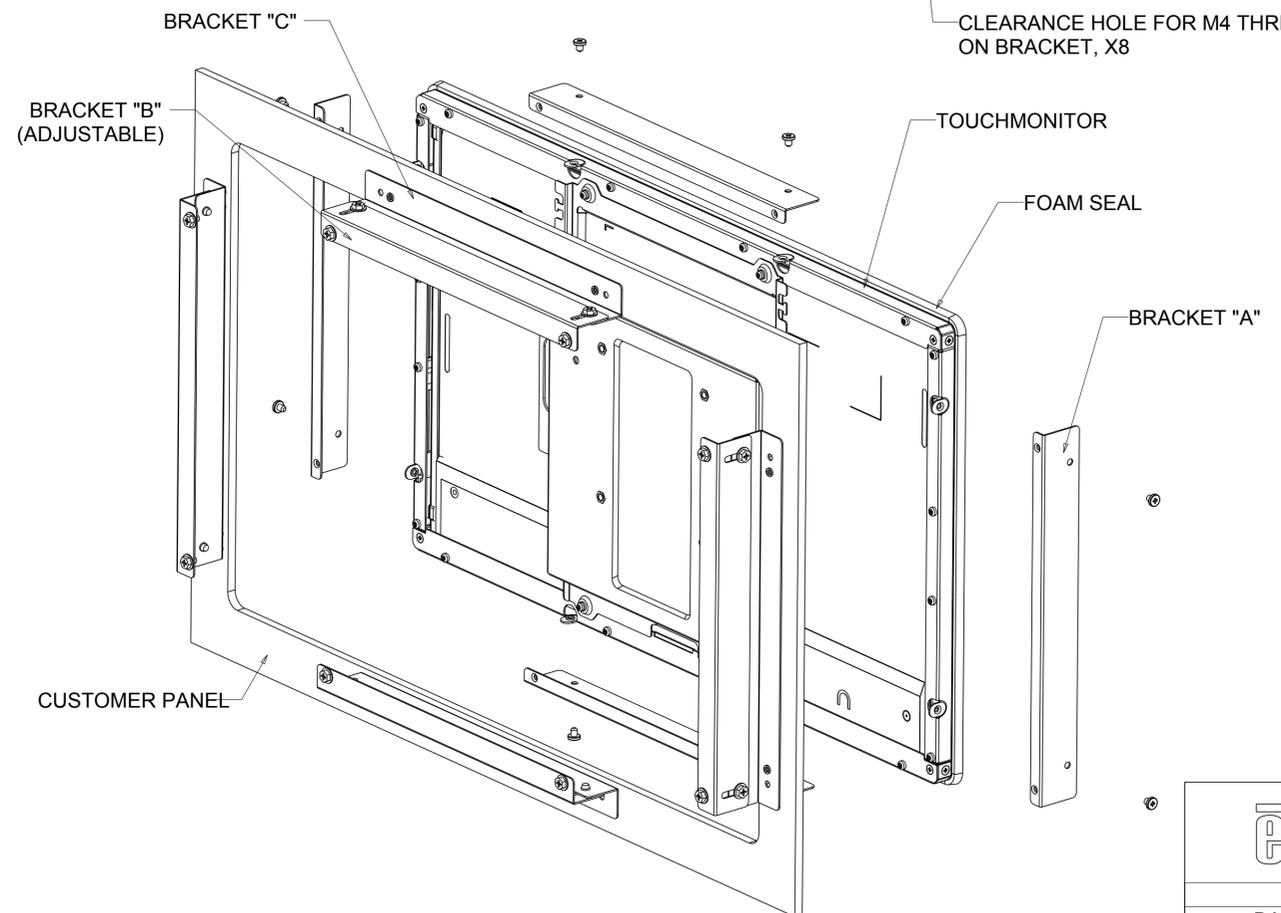

DIMENSIONS ARE IN MILLIMETERS