


9



▶▶▶ Remove the screws.
Remove the insert piece.

10



▶▶▶ Replace the back door (A),
then replace the side door (B).

11




▶▶▶ Turn on the touchcomputer.

Included Items:

- Customer display module (includes pole assembly and cable with USB connector)
- Two screws to attach display module to chassis

Note: For the D-Series touchcomputer, the software for the field-installable peripherals is already pre-installed.

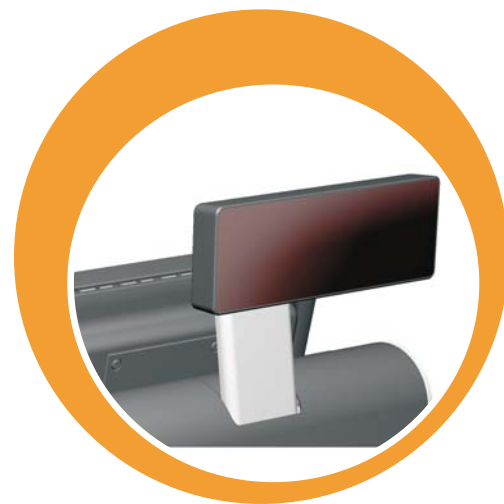

Quick Installation Guide

Installing the Customer Display for the D-Series Touchcomputer

Caution:
Before attaching the customer display, make sure that the touchcomputer is powered off.

© 2009 Tyco Electronics.



www.elotouch.com



Revision A
P/N E861795

North America
Elo TouchSystem
301 Constitution Drive,
Menlo Park, CA 94025
www.elotouch.com

Elo Technical Support
Online self-help:
www.elotouch.com/go/websupport
Technical Support contacts in your region:
www.elotouch.com/go/contactsupport

Europe
Tel +32 (0)16 35 21 00
Fax +32 (0)16 35 21 01
elosales@elotouch.com

Asia-Pacific
Tel +81 (45) 478-2161
Fax +81 (45) 478-2180
www.tps.co.jp

Latin America
Tel 1-305-428-5210
Fax 1-305-717-4909
www.elotouch.com.ar



Tyco Electronics

Our commitment. Your advantage.



▶▶▶ Turn off the power to the touchcomputer.



▶▶▶ Remove the side door, as shown.



▶▶▶ Remove the back door of the unit.



▶▶▶ Insert the hooks on the customer display into the holes in the panel.



▶▶▶ Push the display down.



▶▶▶ Add the screws.



▶▶▶ Route the cable through the clip.



▶▶▶ Connect the cable to the USB connector marked with the display icon.

