



### **Elo Touch Solutions Technical Support**

Online self-help: www.elotouch.com/go/websupport

### **North America**

Elo Touch Solutions 301 Constitution Drive Menlo Park, CA 94025 www.elotouch.com

### Europe

Tel +32 (0)16 35 21 00 Fax +32 (0)16 35 21 01 elosales@elotouch.com

### Technical Support contacts in your region:

www.elotouch.com/go/contactsupport

### Asia-Pacific

Tel +81 (45) 478-2161 Fax +81 (45) 478-2180 www.tps.co.jp

### Latin America

Tel 1-305-428-5210 Fax 1-305-717-4909 www.elotouch.com.ar

The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.

Elo (logo) and Elo Touch Solutions are trademarks of Elo and its Affiliates.

Copyright © 2012 Elo Touch Solutions, Inc. All Rights Reserved.







## **Quick Installation Guide**

# B-Series Rev.B AiO Multifunction Touchcomputer

Revision A P/N E838190





### Installation

1

3



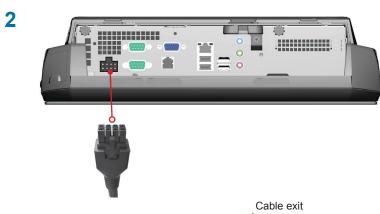



### Included items:

- B-Series Touchcomputer
- US Power Cable
- European Power Cable
- Regional Power cable (where required)
- Power Adapter

- Cable Cover Security Screw
- Base Plate
- DVD for Drivers and User Manuals

### Optional peripherals:

- E806884 12V DC Replacement Power Supply
- E545781 Magnetic Stripe Reader
- E879762 Rear-Facing Customer Display (2x20 VFD)
- E750095 Rear-Facing LCD Monitor Bracket Kit
- E807955 0700L 7" Rear Facing LCD no touch
- E791658 0700L 7" Rear Facing LCD AccuTouch
- E375206 Biometric Fingerprint Reader
- E249774 USB Wireless Kit (B/G/N)
- E778613 Second HDD/SSD Mounting Kit Only (no drive)
- E826525 Second 320GB Hard Disk Drive (HDD) Kit
- E527851 2GB DDR3 Memory SO-DIMM Kit, 1333MHz
- E581416 4GB DDR3 Memory SO-DIMM Kit, 1333MHz

### 中国 RoHS

根据中国(电子讯息产品污染控制管理办法),以下部份列出本公司产品中可能包含的有毒和/或有害物质的名称和含量

部件名称		有毒有害物质或元素					
PF II AD AU	铅(Pb)	汞(Hg)	镉(Cd)	六价铬(Cr <sup>6+</sup> )	多澳联苯(PBB)	多溴二苯醚(PBDE)	
塑料部件	О	o	О	О	О	О	
金属部件	x	o	o	О	О	O	
电线电缆组件	x	o	o	o	О	0	
LCD 屏	x	О	o	О	0	О	
触 控 屏	x	o	o	О	0	0	
电路模组	x	o	o	o	0	О	
软件 (CD等	o	o	o	o	О	О	

O 表示该有毒有害物质在该部件所有均质材料中的含量均在 SJ/T 11363-2006 标准规定的限量要求下. X 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出在 SJ/T 11363-2006 标准规定的限量要求,对于所有显示 X 的情况,本公司按照 EU RoHS 采用了容许的豁免指标.

### 产品标示说明

(1) 根据 SJ/T11364-2006 要求,本公司电子信息产品均注明以下污染控制标志,本产品环保使用期限为10年,在下到温度和湿度使用的条件下不会发生外泄或突变,使用该电子讯息产品不会对环境造成严重的等。"截作条件 温度:0°C-35°C(32°F-95°F)/湿度:20°S-80°C(不凝结),"请告诉条件 温度:3°C-20°C-22°F-140°F/温度:5°S-95°C(不凝结).



(2). 本公司鼓励并建议客户将本产品依据所在地的相关法令,进行回收及再利用,切勿随意与一般垃圾丢弃.

