



▶▶▶ Replace the side door.



▶▶▶ Turn on the touchcomputer.

Included Items:

- 80GB SATA hard drive
- Four screws to mount hard drive
- Four grommets



Quick Installation Guide

Installing a Secondary Hard Drive for the 15D1 Touchcomputer

Caution:
Before installing the hard drive, make sure that the touchcomputer is powered off.



www.elotouch.com



Revision A
P/N E199284

North America
Elo TouchSystem
301 Constitution Drive,
Menlo Park, CA 94025
www.elotouch.com

Elo Technical Support
Online self-help:
www.elotouch.com/go/websupport
Technical Support contacts in your region:
www.elotouch.com/go/contactsupport

Europe
Tel +32 (0)16 35 21 00
Fax +32 (0)16 35 21 01
elosales@elotouch.com

Asia-Pacific
Tel +81 (45) 478-2161
Fax +81 (45) 478-2180
www.tps.co.jp

Latin America
Tel 1-305-428-5210
Fax 1-305-717-4909
www.elotouch.com.ar





▶▶▶ Turn off the power to the touchcomputer.



▶▶▶ Remove the side door, as shown.




▶▶▶ Remove the front door.




▶▶▶ Remove the 2 screws and pull out the hard drive door.



▶▶▶ Push in the 4 grommets. Secure the drive with 4 screws.

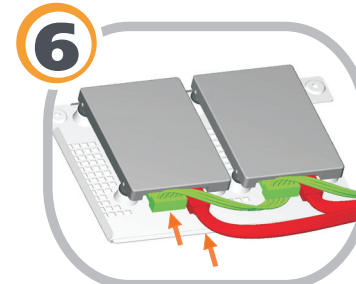

▶▶▶ Add the power and data cable.

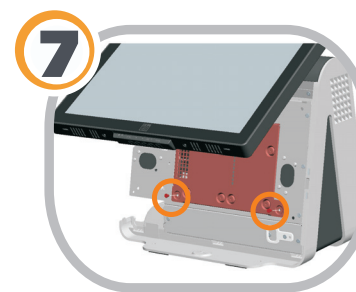

▶▶▶ Replace the hard drive door and the 2 screws.



▶▶▶ Replace the front door.