

Quick Installation Guide


Attaching the Magnetic Stripe Reader (MSR)

Caution:

Before attaching the MSR to your monitor, make sure that power to the monitor and computer is off.



www.elotouch.com

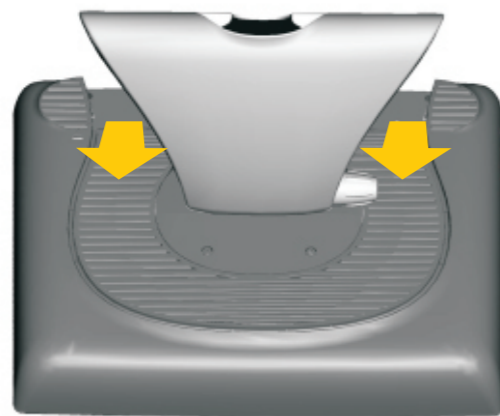

1 Take off the back cover insert.



2 Remove the plastic piece from the back cover. Place the MSR onto the rear of the monitor, along the monitor's left side. Ensure the two holes in the MSR tab align with the two holes in the rear of the monitor.



3 Secure the MSR to the monitor using two screws from the MSR kit.



4 Route cable under the plastic clips to hold cable in place.




5 Insert the connector of the cable accompanying the MSR into the mating connector on the rear of the monitor.



6 Replace the back cover insert.



7 Remove the rubber cap labeled "MSR" from the left USB connector and discard. Connect the USB cable from the MSR kit to the USB connector.

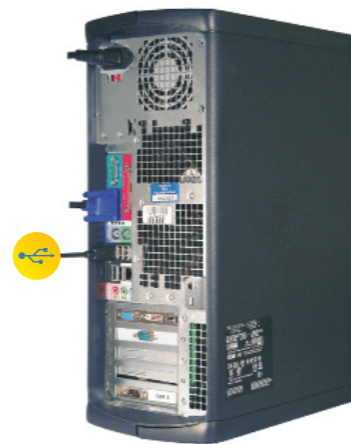

8 Connect the other end of the USB cable to a USB port in your computer.



9 Turn on power to the monitor and computer.