


INTELLITOUCH® TOUCHSCREEN

SCN-ST-FLT23.1-001-009

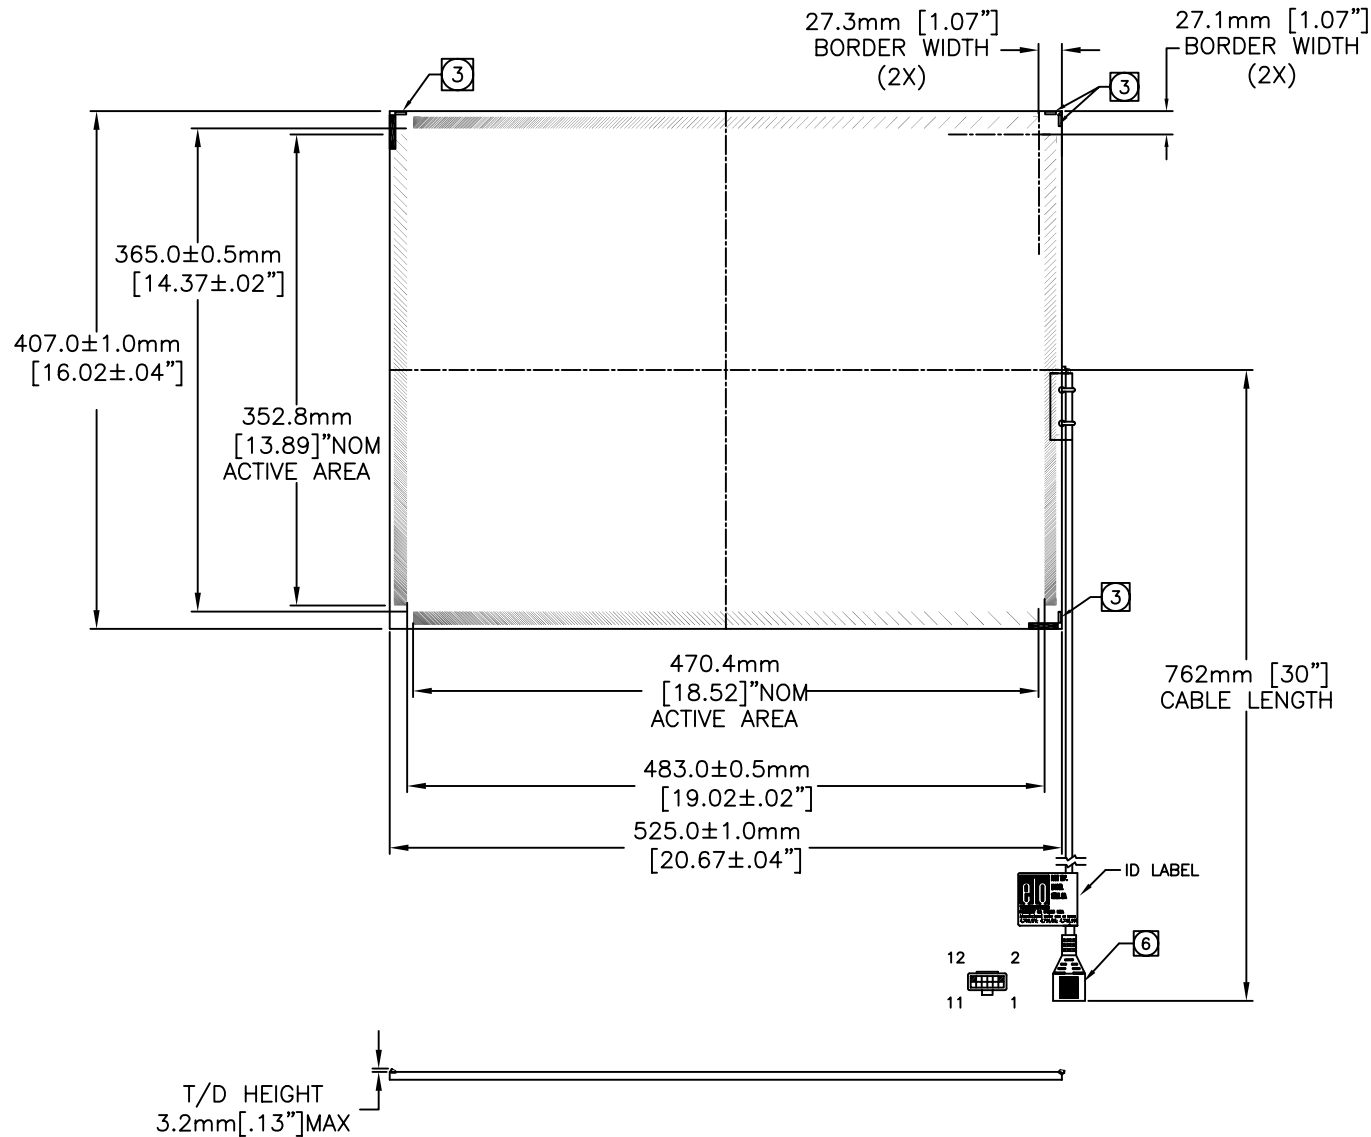

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS AND INCHES.
 2. CHEMICALLY STRENGTHENED GLASS THICKNESS: 5.6±0.3mm [0.22±.012"].
 3. TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. HEIGHT OF TRANSDUCERS ABOVE GLASS SURFACE=3.2mm [.13"] MAX.
 4. WIRES ARE ROUTED ON THE TOP SURFACE (ALONG THE EDGE) OF THE SCREEN.
 6. BERG 65043-031, 2x6 HOUSING WITH BERG 48239-000 RECEPTACLES, DIRECTLY MATES WITH ANY OF THE FOLLOWING:
-INTELLITOUCH SERIAL CONTROL BOARD
-012226 CABLE (2x6 TO 8" DB9 BULKHEAD)
- REFER TO WWW.ELOTOUCH.COM FOR CONTROLLERS AND ACCESSORIES PART NUMBERS.
7. THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.

CONNECTION CHART

PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE (+)	BLU	BLK
4	Y TRANSMIT (+)	BLU	GRY
5	Y RECEIVE (-)	BLK	BLK
6	Y TRANSMIT (-)	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT (-)	RED	RED
9	X RECEIVE (-)	RED	BLK
10	X TRANSMIT (+)	GRN	RED
11	X RECEIVE (+)	WHT	BLK
12	KEY		

TOUCHSCREEN TABULATION

PART NO	SURFACE FINISH
E32782-000	ANTI GLARE