


INTELLITOUCH® TOUCHSCREEN
SCN-IT-SPH19.0-006-0BX

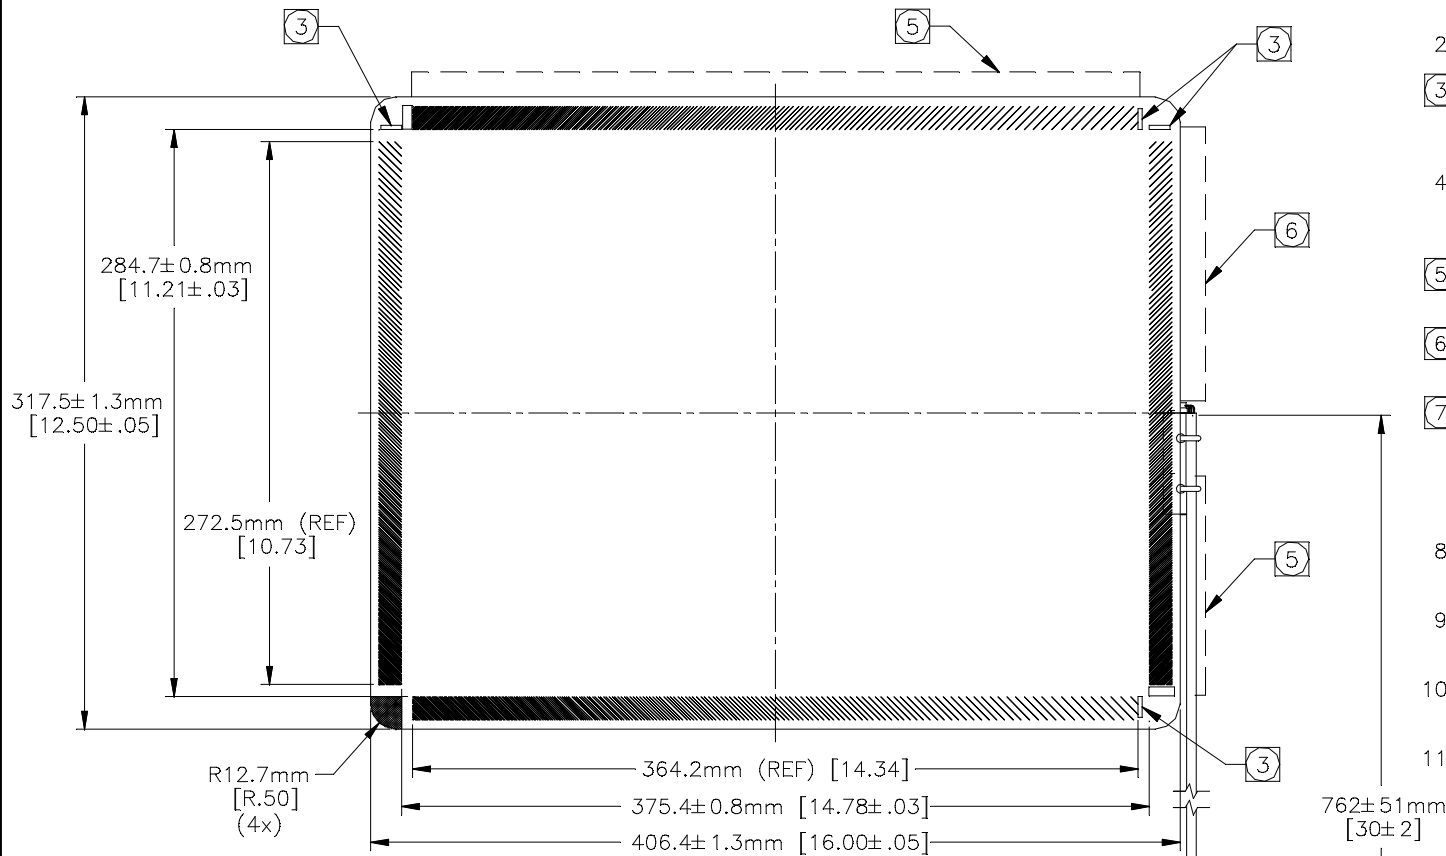

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE (+)	BLU	BLK
4	Y TRANSMIT (+)	BLU	GRY
5	Y RECEIVE (-)	BLK	BLK
6	Y TRANSMIT (-)	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT (-)	RED	RED
9	X RECEIVE (-)	RED	BLK
10	X TRANSMIT (+)	GRN	RED
11	X RECEIVE (+)	WHT	BLK
12	KEY		

NOTES:

- ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS.
- GLASS THICKNESS: 3.2mm/.125 NOMINAL.
- TRANSUCERS ARE LOCATED AT THE POSITIONS SHOWN. HEIGHT OF TRANSUCERS ABOVE GLASS IS .150/3.8mm MAX.
- NO MATERIAL EXTENDS MORE THAN 0.8mm/.03 BEYOND THE BACK SURFACE OF THE GLASS.
- CABLE ROUTING ADDS 2.5mm/.10 MAX AS INDICATED ON SCREEN.
- CABLE ROUTING ADDS 3.8mm/.15 MAX AS INDICATED ON SCREEN.
- BERG 65043-031, 2x6 HOUSING WITH BERG 48239-000 RECEPTACLES, DIRECTLY MATES WITH ANY OF THE FOLLOWING:
-INTELLITOUCH SERIAL CONTROL BOARD
-012226 CABLE (2x6 TO 8" DB9 BULKHEAD)
- ARRAYS AND TRANSUCERS ARE ON THE CONVEX SIDE.
- ARRAY PATTERNS ARE CENTERED ON GLASS WITH A TOLERANCE OF ±1.3mm/.050
- 50±3 SPHERICAL RADIUS OF GLASS. THIS SHOULD MATCH CURVATURE OF MONITOR CRT.
- THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.

TOUCHSCREEN TABULATION	
PART NUMBER	SURFACE FINISH
440789-000	CLEAR
983645-000	SPECIAL APPLICATION ANTIGLARE
661457-000	HI-RESOLUTION ANTIGLARE

